


WASHING MACHINE MWB 70Z

Dimensions scheme
(Not for UL,CSA)



2022

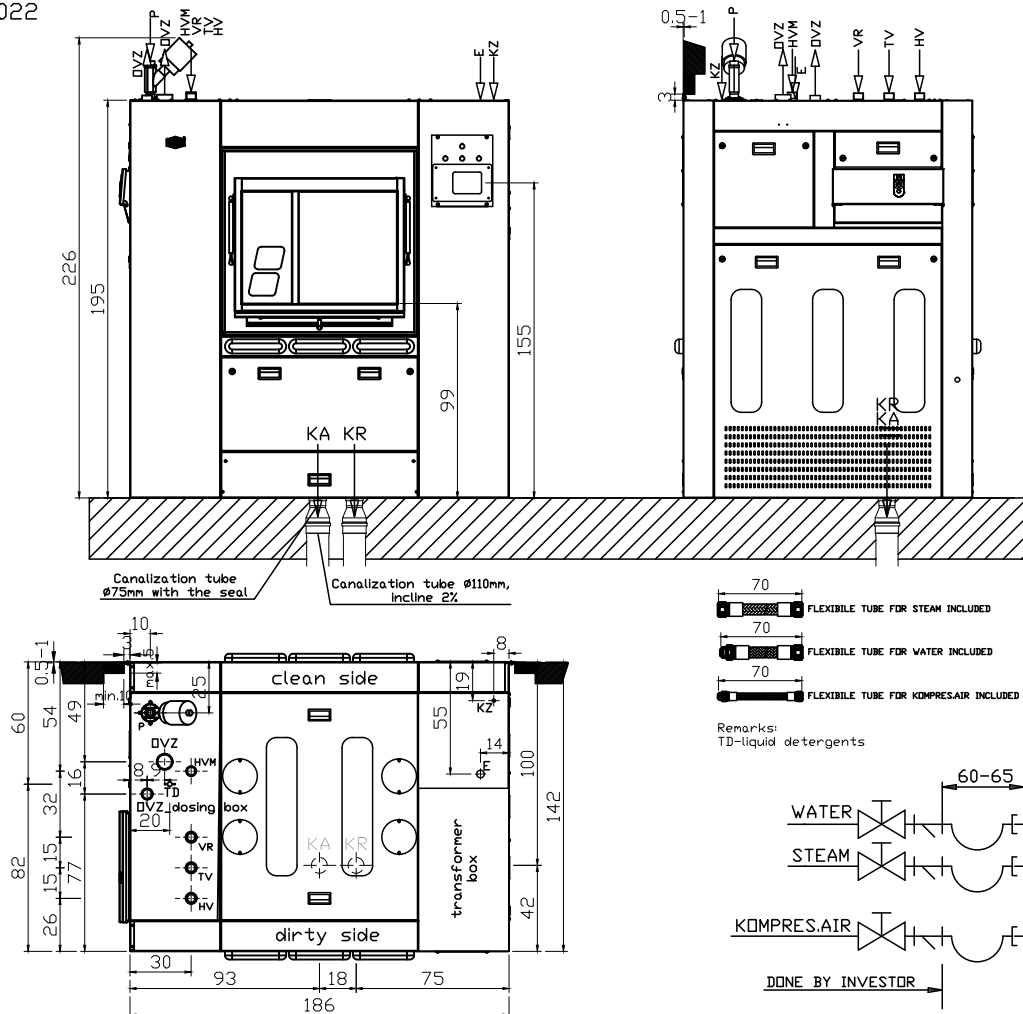

Dimensions in cm!
All rights for changes are reserved

El.connections over GS switch. Leave the length of el.cable longer than 2 m.

TEHN. CHARACTERISTICS	Type of the machine	Units	MWB 70Z (steam heating)	MWB 70Z (steam heating)	MWB 70Z (electric heating)	MWB 70Z (combined heating)
CAPACITY 1:10		kg/fill.	70			
DIMENSIONS		mm	1860 x 1420 x 1950 (2260)			
WEIGHT		kg	2290			
G-faktor			361			
CONNECTIONS:	cold water -HV warm water 75°C-TV cold water-soft -HVM 4th water inlet_option-VR steam (direct) -P kompresed air -KZ air exhaust -DVZ	DN (col)	40 (6/4) 40 (6/4) 40 (6/4) 40 (6/4) 32 (5/4) 40 (6/4) --- Pv or Pn 90+(50_option dosing box)	40 (6/4) 40 (6/4) 40 (6/4) 40 (6/4)	---	Pv or Pn
DRAIN VALVE	-KA	mm	80			
CANALISATION TUBE	-KA	mm	75/110			
CANALIS.FOR RECYCLING (option)	-KR	mm	75/110			
EL.CONNECTION POWER		kW	11,8	(option 59,8)/71,8		
PROTECTION (400V/3NAC/50Hz)		A	40	(option 100)/125		
EL.CONNECTION CABLE -E		mm ² Cu	5x6	(option 5x25)/5x35		
PROTECTION (208V/3AC/50/60Hz)		A	50	224		
EL.CONNECTION CABLE -E		mm ² Cu	4x6	4x95		
PROTECTION (220V/3AC/50/60Hz)		A	50	200		
EL.CONNECTION CABLE -E		mm ² Cu	4x6	4x70		
PROTECTION (240V/3AC/50/60Hz)		A	50	200		
EL.CONNECTION CABLE -E		mm ² Cu	4x6	4x70		
PROTECTION (480V/3AC/50/60Hz)		A	40	100		
EL.CONNECTION CABLE -E		mm ² Cu	4x6	4x25		
PROTECTION (600V/3AC/50/60Hz)		A	25	80		
EL.CONNECTION CABLE -E		mm ² Cu	4x4	4x16		
CONNECT.HEAT.POWER:	steam	kW	180	---		
	electric	kW		(option-45)/60		
	kompresed air	l/s		0,2		
	water	l/s		2		
PRESSURE ON INLETS:	water			2 - 6		
	kompresed air	bar		6 - 10		
	high(Pv)/low(Pn) press.steam		3-8 (Pv) 0.3-0.5 (Pn) --- Pv or Pn			