
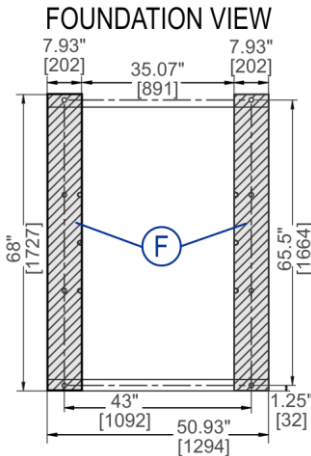
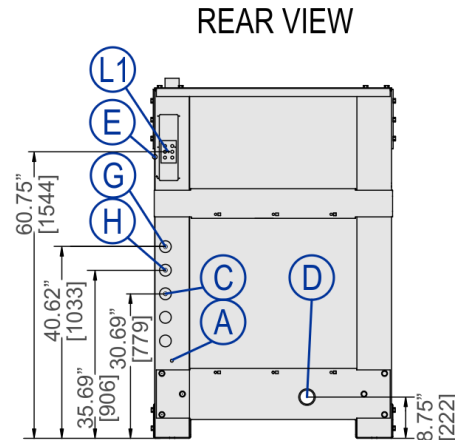
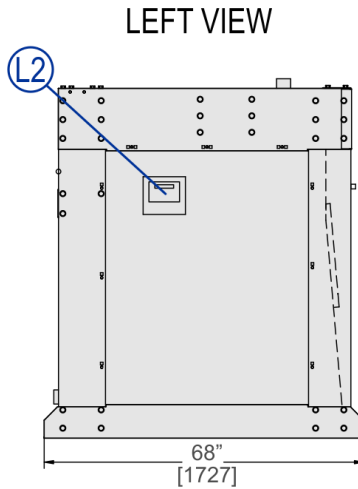



36026 X8R

100 LB. (45KG) CAPACITY
SUSPENDED WASHER-EXTRACTOR

SPECIFICATION SHEET

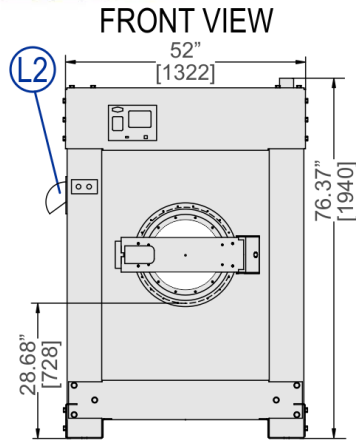

ANCHORING DETAIL

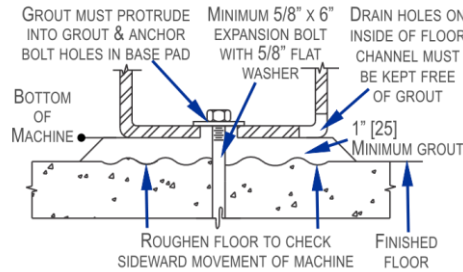

LEGEND

A	Main air .25" (6 mm) NPT
C	Cold water inlet .75" (19 mm) NPT
D	Air operated drain 3" (76 mm) PSJ
E	Electrical connection
F	Anchor bolt holes 1.06" (27 mm)
G	Chemical flush .75" (19 mm)
H	Hot water inlet .75" (19 mm) NPT
L1	Liquid supply inlets
L2	Soap chute

MECHANICAL SPECIFICATIONS

Capacity – lbs (kg)	100 (45)
Cylinder Diameter x Depth – ins (mm)	36 x 26 (914 x 660)
Cylinder Volume – cu. ft. (L)	15.3 (433.7)
Door Opening – ins (mm)	20.37 (518)
Machine Dimensions (W x D x H) – ins (mm)	52 x 68 x 76.37 (1322x1727x1940)
Shipping Dimensions (W x D x H) – ins (mm)	59 x 71 x 81 (1500x1800x2060)
Motor – HP (kW)	10 (7.4)
Wash Speeds – RPM	39-45
Distribution Speed – RPM	65
Extraction Speeds – RPM	375-766
Extraction G-Force	300
Static Weight – lbs (kg) ✧	4505 (2043)
Max. Dynamic Load RMS – lbs (kg) ✧	531 (241)
Frequency (Hz)	12.78
Water Pressure (Required) – psi (bar)	10-75 (0.69-5.17)
Water Valve Cv Rating at 72°F (22°C)	5.8 (21.95)
Minimum Recommended Distance Between Machines – ins (mm)	12 (305)

ELECTRICAL SPECIFICATIONS

Voltage	Running Amps	Fuse (Amps)	Circuit Breaker (Amps)
208/3/60	24	FRN40	40
220/3/50-60	23	FRN40	40
240/3/60	21	FRN40	40
380/3/50-60	16	FRS25	25
415/3/50	14	FRS25	25
480/3/60	13	FRS20	20

See Fuse and Wire Size manual MAEFUSE1BE for safety information.

▼ See dimensional drawing for complete details.

✧ It is the sole responsibility of the owner/user to assure that the floor and/or any other supporting structure exceeds not only all applicable building codes, but also that the floor and/or any other supporting structure for each washer-extractor or group of washer-extractors has sufficient strength and rigidity (i.e., a natural or resonant frequency many times greater than the rotational machine speed with a reasonable factory of safety) to support the weight of all the fully loaded machine(s) including the weight of the water and goods, and including the published 360° rotating sinusoidal RMS forces that are transmitted by the machine(s). Contact the factory for additional machine data for use by a structural engineer.



36026 X8R

100 LB. (45KG) CAPACITY
SUSPENDED WASHER-EXTRACTOR

SPECIFICATION SHEET

Standard Features:

- 6 speeds (2 wash, 1 distribution, 3 extract)
- MilTouch-EX™ programmable controller
- Full-color touch screen
- Single-motor inverter drive
- Tall, lifting ribs
- Tapered roller bearings
- High M.A.F. (Mechanical Action Factor)
- Large cylinder perforations
- Fresh-water flushing chemical manifold
- Auto tension V-belt drive
- 12 liquid chemical injection ports
- Control reads in English/second language
- 5-year limited warranty on frame, cylinder &




Optional Features:

- Steam
- Electric heat
- 5 compartment flushing supply injector

Why Purchase Milnor?


- RinSave® water saver in conjunction with large cylinder perforations provides more efficient rinsing. **BENEFIT: Saves water, energy, and time.**
- Larger cylinder volume than most competitive similar sized washer-extractors provides *greater productivity*. More linen washed per day, or fewer hours required to process. **BENEFIT: Saves labor.**
- Greater cylinder perforated-area generates *better wash quality, better rinsing and better extraction*. **BENEFIT: Better extraction saves dryer fuel.**
- Tall perforated ribs provide excellent lift and high drop. **BENEFIT: Greater mechanical action (M.A.F.) leads to better wash quality.**
- 300-G high extract provides excellent moisture removal. Lower extract speeds are available for uniforms, delicate textiles and blended fabrics. **BENEFIT: Better extraction saves dryer fuel.**
- MilTouch-EX™ touch screen control, utilizing resistive touch screen technology and full VGA resolution, has a clear and informative display which shows current machine status info including total formula time and time elapsed. Formulas can be developed on a PC, saved to USB external memory and uploaded with a screen touch. Controller also provides intuitive fault diagnosis and relevant troubleshooting suggestions. **BENEFIT: Fewer operator errors.**
- Superior product support through local, highly-skilled dealers. **BENEFIT: Faster repairs mean less downtime.**



Safe chemical injection



Advanced control



SmoothCoil™
Suspension System

Contact Milnor for your local, authorized dealer:

Pellerin Milnor Corporation
P.O. Box 400 • Kenner, LA 70063
t: 504-467-9591 • f: 504-468-3094

