



MWF63C7

140 LB. (63KG) CAPACITY
SUSPENDED WASHER-EXTRACTOR


SPECIFICATION SHEET

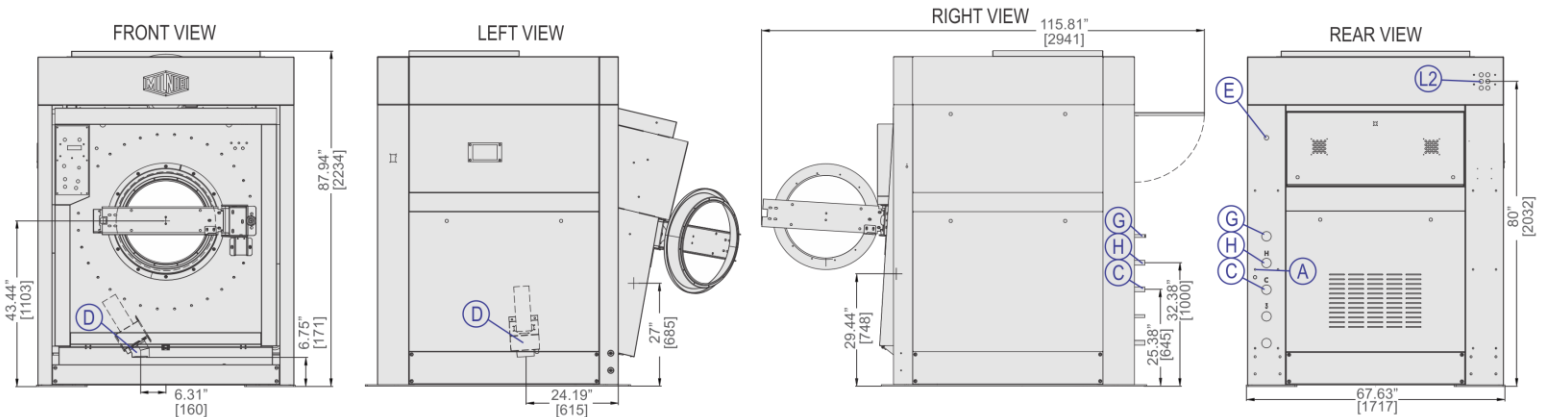

FOUNDATION

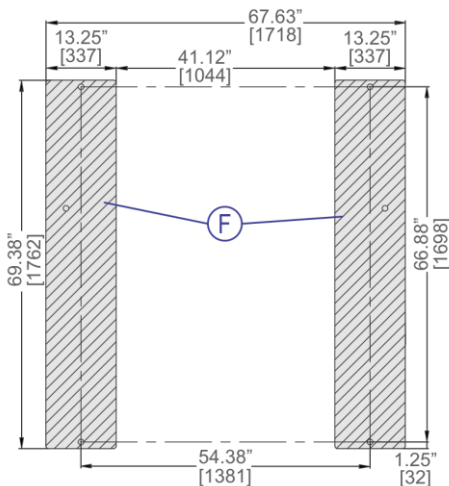

ANCHORING DETAIL

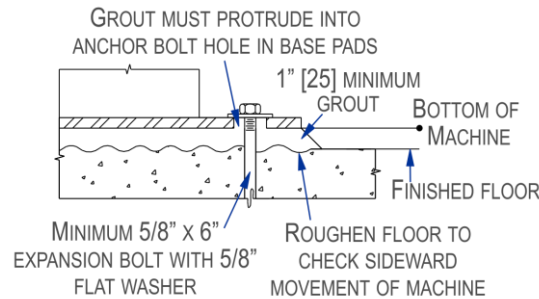

LEGEND

A	Air inlet .25" (6.3mm) NPT
C	Cold water inlet 1.25" (32 mm) NPT
D	Drain to sewer 4.5" (114 mm)
E	Electrical connection
F	Foundation pads; anchor bolt holes 1.06" (27mm)
G	Chemical flush .75" (19mm) NPT
H	Hot water inlet 1.25" (32 mm) NPT
L2	Liquid soap inlets

MECHANICAL SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

Capacity – lb (kg)	140 lb (63 kg)
Cylinder Diameter x Depth – in (mm)	42 x 26 (1067 x 660)
Cylinder Volume – cu. ft. (L)	20.85 (590)
Door Opening – in (mm)	26 (660)
Machine Dimensions (W x D x H) – in (mm)	67.63x72.09x87.95 (1717x1813x2234)
Shipping Dimensions (W x D x H) – in (mm)	78.90x80.12x95 (2004x2035x2413)
Motor – HP (kW)	15 (11.2)
Wash Speeds – RPM	36-40
Distribution Speed – RPM	60
Extraction Speeds – RPM	710
Extraction G-Force	300
Static Weight – lb (kg) ✧	6,218 lb (2820_)
Max. Dynamic Load RMS – lb (kg) ✧	840 lb (381)
Frequency -- Hz	11.83
Water Pressure <i>(Required)</i> psi (bar)	10-75 (0.69 – 5.17)
Water Valve Cv Rating	12.9 (48.83)
Minimum Recommended Distance Between Machines – in (mm)	12 (305)

Voltage	Running Amps	Fuse (Amps)	Circuit Breaker (Amps)
208/3/60	40	FRN50	50
220/3/50-60	38	FRN50	50
240/3/60	35	FRN50	50
380/3/50-60	23	FRS30	30
415/3/50	21	FRS25	25
480/3/60	19	FRS25	25

See Fuse and Wire Size manual MAEFUSE1BE for safety information. Contact factory regarding single phase availability.

▼ See dimensional drawing for complete details.

✧ It is the sole responsibility of the owner/user to assure that the floor and/or any other supporting structure exceeds not only all applicable building codes, but also that the floor and/or any other supporting structure for each washer-extractor or group of washer-extractors has sufficient strength and rigidity (i.e., a natural or resonant frequency many times greater than the rotational machine speed with a reasonable factory of safety) to support the weight of all the fully loaded machine(s) including the weight of the water and goods, and including the published 360° rotating sinusoidal RMS forces that are transmitted by the machine(s). Contact the factory for additional machine data for use by a structural engineer.



MWF63C7

140LB. (63KG) CAPACITY

SUSPENDED WASHER-EXTRACTOR

SPECIFICATION SHEET

Standard Features:

- RinSave® water saving technology
- 13.5° tilting forward
- 7 speeds (2 wash, 1 distribution, 1 RinSave, 3 extract)
- E-P PLUS® programmable controller
- Back-lit LCD display
- Single-motor inverter drive
- Tall, lifting ribs
- Tapered roller bearings in front and rear
- High M.A.F. (Mechanical Action Factor)
- Large cylinder perforations
- Fresh-water flushing chemical manifold
- Six (6) liquid chemical injection ports
- Control reads in English/second language
- 5-year limited warranty on frame, cylinder & shell

Why Purchase Milnor?

- RinSave® water saver in conjunction with large cylinder perforations provides more efficient rinsing. **BENEFIT: Saves water, energy, and time.**
- Larger cylinder volume than most competitive similar sized washer-extractors provides *greater productivity*. More linen washed per day, or fewer hours required to process. **BENEFIT: Saves labor.**
- Greater cylinder perforated-area generates *better wash quality, better rinsing and better extraction*. **BENEFIT: Better extraction saves dryer fuel.**
- Faster process times reduce fabric wear, promoting *longer linen life!* **BENEFIT: Saves linen replacement costs.**
- Tall perforated ribs provide excellent lift and high drop. **BENEFIT: Greater mechanical action (M.A.F.) leads to better wash quality.**
- 300-G high extract provides excellent moisture removal. Lower extract speeds are available for uniforms, delicate textiles and blended fabrics. **BENEFIT: Better extraction saves dryer fuel.**
- E-P Plus Controller with back-lit LCD display allows operator to choose from formulas from real words, not codes. Standard controller features English/Spanish (other languages optional). Controller also provides diagnostic and error messages. Shortens training time of new employees. **BENEFIT: Fewer operator errors.**
- Superior product support through local, highly-skilled dealers. **BENEFIT: Faster repairs mean less downtime.**



Optional Features:

- Steam
- Electric heat
- 5 compartment flushing supply injector



Safe chemical injection



Superior cylinder design



SmoothCoil™ 4 Point Suspension System

Contact Milnor for your local, authorized dealer:

Pellerin Milnor Corporation
P. O. Box 400 • Kenner, LA 70063
t: 504-467-9591 • f: 504-468-3094

