

SAFETY ALERT for Owner/Managers and Maintenance Personnel: Using the Door Interlock Bypass Key Switch


The hand-operated access doors on this machine are equipped with safety lockout switches that disable the machine if a door is opened. The Door Interlock Bypass key switch permits bypassing this safety feature to allow access to certain moving parts during required maintenance procedures. This key switch, located inside the low voltage control box, is shown in Figure 1.



DANGER 1: Crush Hazard—The “Maintenance Only” position bypasses door interlocks and permits access to moving parts during both manual and automatic operation. **To prevent serious injury or death**, comply with, or ensure compliance with the following:

- Never use the machine for normal operation with this switch in the “Maintenance Only” position.
- Never use this switch to clear faults or for any operational function.
- Use this switch *only* if you are a trained, authorized service technician, and only when performing maintenance that requires immediate access to moving parts normally shielded by the doors.
- Always turn the switch to the “Safe Operation” position **and remove the key** before resuming normal operation or stepping away from the machine.
- Keep the Door Interlock Bypass key secured away from machine operators and all other personnel who do not fully understand the results of using it.
- Keep all electrical and control cabinets closed and securely latched. Keep control cabinet keys away from untrained employees.

Figure 1: Door Interlock Bypass Key Switch and Safety Placard

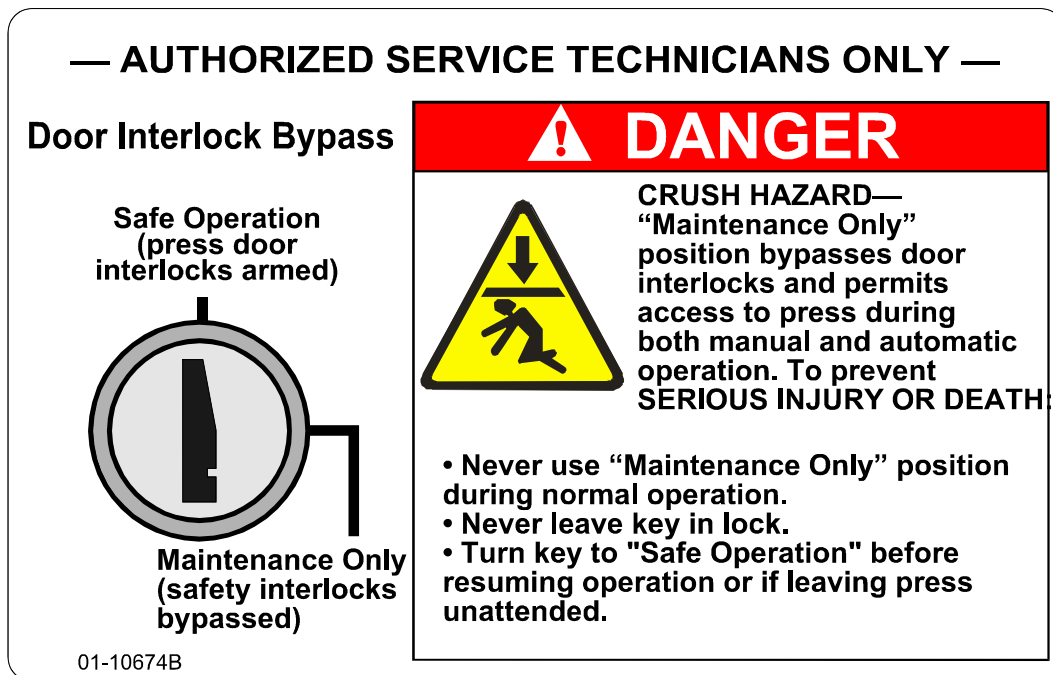

— End of BICP1S01 —