


WASHING MACHINE MWB 63Z

Dimensions sheme

2017

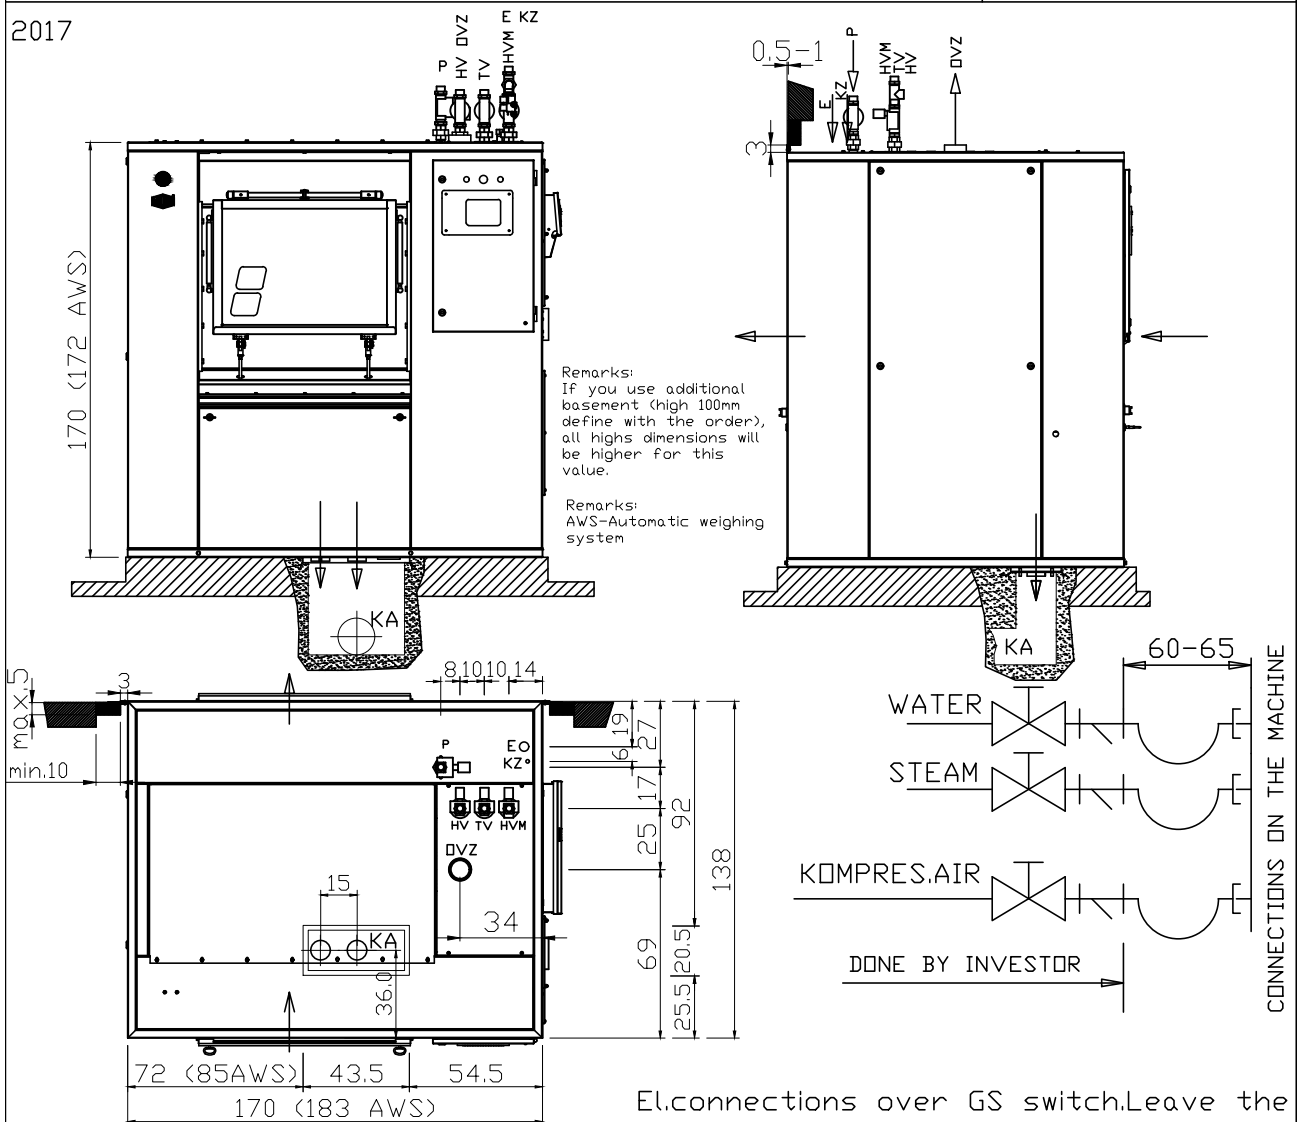

El.connections over GS switch. Leave the length of el.cable longer than 2 m.

Dimensions in cm!

TEHN. CHARACTERISTICS	Type of the machine	Units	MWB 63Z Pv	MWB 63Z Pn	MWB 63Z E	MWB 63Z K
CAPACITY		kg/fill.	63			
DIMENSIONS		mm	1700/(1830 AWS) x 1380 x 1700/(1720 AWS)			
WEIGHT		kg	1980			
G-faktor			360			
CONNECTIONS: cold water -HV warm water 75°C-TV cold water-soft -HVM steam (direct)-Pv or Pn kompresed air -KZ air exhaust -DVZ	DN (col)		25 (1)			
			25 (1)			
			25 (1)			
			25 (1)	40 (6/4)	---	Pv or Pn
			10 (3/8)			
CANALISATION TUBE -KA		mm	150			
EL.CONNECTION POWER		kW	11,8		59,8	
PROTECTION (400V/3NAC/50Hz)		A	40		100	
EL.CONNECTION CABLE -E		mm ² Cu	5x6		5x16	
PROTECTION (220V/3AC/50Hz)		A	40		200	
EL.CONNECTION CABLE -E		mm ² Cu	4x6		4x70	
PROTECTION (600V/3AC/50Hz)		A	20		80	
EL.CONNECTION CABLE -E		mm ² Cu	4x2,5		4x16	
CONNECT.HEAT.POWER: steam electric kompresed air water	kW		120		---	
			---		120	
			48			
PRESSURE ON INLETS: water kompresed air steam	l/s		0,2			
			2			
			2			
PRESSURE ON INLETS: water kompresed air steam	bar		2 - 6			
			6 - 10			
			3 - 8	0,3 - 0,5	---	Pv or Pn