



Manual Number: MCDTBI01  
Edition (ECN): 2025352

# Installation

## 6458TS1L/R, 6458TT1L/R





# Contents

1 Safety.....	4
Limited Standard Warranty .....	5
1.1 How to Get the Necessary Repair Components .....	6
1.2 Trademarks .....	6
1.3 Safety — Pass Through Dryer .....	7
1.3.1 Safety Alert Messages—Internal Electrical and Mechanical Hazards .....	7
1.3.2 Cylinder and Processing Hazards .....	8
1.3.3 Safety Alert Messages—Unsafe Conditions .....	8
1.3.3.1 Hazards Resulting from Inoperative Safety Devices.....	8
1.3.3.2 Hazards Resulting from Damaged Mechanical Devices .....	9
1.3.4 Careless Use Hazards .....	9
1.3.4.1 Careless Operation Hazards—Vital Information for Operator Person- nel (see also operator hazards throughout manual) .....	9
1.3.4.2 Careless Servicing Hazards—Vital Information for Service Personnel (see also service hazards throughout manuals) .....	9
1.4 Installation Tag Guidelines .....	10
Guards and Covers 6450, 6458, 6464, 7676, 8282 Dryers.....	14
Unload Shrouds 6458TG1L/R,TS1L/R; 6464TG1L/R,TS1L/R; 7676TG1L/R; 8282TG1L/R .....	18
2 Installation .....	21
Dryer Shuttle Rail Installation .....	22
2.1 Dryer Assembly and Setting .....	23
2.1.1 Handling Precautions.....	23
2.1.2 Site Requirements.....	25
2.1.2.1 Dryer Environment.....	25
2.1.2.2 Clearances.....	25
2.1.2.3 Foundation.....	25
2.1.3 Assembly .....	25
2.1.3.1 Installing the Legs on the House .....	25
2.1.3.2 Anchoring .....	26
2.1.3.3 Leveling Procedures .....	26
2.1.3.4 Machine-to-Machine Brackets .....	26
2.1.3.5 Check Cylinder Interior .....	27
Lifting Brackets 5050, 6450, 6458, 6464, 7676, 8282 Dryers .....	28
Dryer to Dryer Mounting Parts 5050, 6450, 6458, 6464, 7676, 8282 Dryers .....	30
Pedestal Base Installation 5050, 6450, 6458, 6464, 7676, & 8282 Dryers .....	32
Pedestal Base 6458TG1L/R ,TS1L/R 6464TG1L/R ,TS1L/R .....	36
Unload Bridge Installation 5050, 6450, 6458, 6464, 7676, & 8282 Dryers.....	42
2.2 Air and Duct Requirements for Milnor® Pass-through Dryers .....	44
2.2.1 Air Requirements.....	44
2.2.1.1 Air Flow.....	44
2.2.1.2 Back Pressure .....	44
2.2.2 Duct Requirements .....	44
2.2.2.1 Is an Inlet Duct Necessary? .....	45
2.2.2.2 Duct Durability.....	45
2.2.2.3 Duct Functionality .....	46
2.2.2.3.1 Multiple Dryers and Lint Collection .....	46

2.2.2.3.2 Transitions and Elbows .....	46
2.2.2.3.3 Vents .....	47
2.2.3 Duct Layout and Pressure Drop Calculations .....	47
2.2.3.1 Units of Measure Used in the Calculations .....	47
2.2.3.2 Duct Components and Their Pressure Drops .....	48
2.2.3.3 Example Layout.....	49
2.2.3.4 Pressure Drop Equations and Examples.....	51
2.3 Utility Requirements For Gas, Steam and Thermal Oil Dryers .....	51
2.3.1 Plumbing and Other Mechanical Connections .....	52
2.3.1.1 Hazards and Precautions.....	52
2.3.1.1.1 All Models .....	52
2.3.1.1.2 Gas and Propane Models .....	53
2.3.1.1.3 Steam and Thermal Oil Models.....	53
2.3.1.2 Heating Fuel and Air Intake Requirements .....	54
2.3.1.3 Other Mechanical Requirements .....	56
2.3.2 Electrical Connections.....	56
2.3.2.1 Hazards and Precautions.....	56
2.3.2.2 Remove Blower Shipping Bracket and Reconnect Motor Contactor Coil .....	57
2.3.2.3 Electric Power Connection Capacities .....	58
2.3.2.4 Control Connections.....	58
2.3.3 Bumper Guard Installation .....	58
2.4 About The Steam and Hot Oil Control Systems for Milnor® Dryers .....	59
2.4.1 How to Protect Steam Coils from Water Hammer Damage.....	59
2.4.2 About The Standard Steam Control System.....	60
2.4.3 About The Optional On-Off Steam Control System with Y-Type, Air Oper- ated Valve .....	60
2.4.4 About the Modulating Hot Oil Valve .....	61
2.4.4.1 How Modulated Hot Oil Works .....	61
2.4.4.2 How to Manually Command a Modulating Valve Position.....	62
2.4.4.3 When Recalibration is Required.....	63
2.4.5 Calibrating the Hot Oil Positioner/Valve.....	64
2.4.5.1 Calibrating the Positioner/valve for Minimum Temperature .....	65
2.4.5.2 Calibrating the Positioner/Valve For Maximum Temperature .....	66
2.4.5.3 Verifying Positioner/Valve Settings.....	66
3 Dimensional Drawings .....	68
BD6458TS1LEE/2022086D — 6458TS1L .....	69
BD6458TS1LEB/2016236D — 6458TS1L Options .....	70
BD6458TS1LEC/2016236D — 6458TS1L & MLF1010 .....	71
BD6458TS1LED/2016236D — 6458TS1L with Recirculation .....	72
BD6458TS1LEF/2016236D — 6458TS1L with Recirculation & MLF1010 .....	73
BD6458TS1REE/2022086D — 6458TS1R .....	74
BD6458TS1REB/2016236D — 6458TS1R Options .....	75
BD6458TS1REC/2016236D — 6458TS1R & MLF1010 .....	76
BD6458TS1RED/2016236D — 6458TS1R with Recirculation .....	77
BD6458TS1REF/2016236D — 6458TS1R with Recirculation & MLF1010 .....	78
BD6458TS1PEE/2024443D — 6458TS1L/TS1R Minimum Spacing .....	79
BD6458TT1LEE/2025094D — 6458TT1L .....	80



BD6458TT1REE/2025094D — 6458TT1R .....	81
BD6458DLCPBE/2014453D — Recommended Lint Collector Piping .....	82

## Figures

Figure 1	Front Lifting Bracket .....	24
Figure 2	Rear Lifting Bracket .....	24
Figure 3	Spreader Bar Between Front Lifting Plates .....	24
Figure 4	Apply sealing foam to left house before setting into position .....	24
Figure 5	Machine-to-Machine Brackets and Spacers .....	27
Figure 6	5050, 6450, 6458, 6464, 7676, and 8282 Dryers (7676 Shown) .....	28
Figure 7	8282 Dryers .....	28
Figure 8	Placement of Components with Regard to Pedestal Height .....	32
Figure 9	Pedestal Options and Hardware Connections .....	33
Figure 10	Anchoring .....	34
Figure 11	Round duct elbow fabrication .....	47
Figure 12	Vent Designs .....	47
Figure 13	<b>Example Duct Layout for Model 6464TG1L Dryer</b> .....	50
Figure 14	Blower Shipping Restraint .....	57
Figure 15	Reconnect Blower Contactor Coil Wires .....	58
Figure 16	Bumper Guard Installation .....	59
Figure 17	Standard Steam Piping .....	61
Figure 18	Hot Oil Piping .....	62
Figure 19	Hot Oil Modulating Valve and Positioner .....	64
Figure 20	Cam Setting at Modulating Valve Position 000 .....	65
Figure 21	Cam Setting at Modulating Valve Position 255 .....	66
Figure 22	Modulating Valve Flats .....	67

## Tables

Table 1	Trademarks .....	6
Table 2	Parts List—Guards and Covers 6450, 6458, 6464, 7676, 8282 Dryers .....	16
Table 3	Parts List—Unload Shrouds 6458TG1L/R, TS1L/R; 6464TG1L/R, TS1L/R; 7676TG1L/R; 8282TG1L/R .....	19
Table 4	Parts List—Lifting Brackets 5050, 6450, 6458, 6464, 7676, 8282 Dryers .....	29
Table 5	Parts List—Dryer to Dryer Mounting Parts 5050, 6450, 6458, 6464, 7676, 8282 Dryers .....	31
Table 6	Parts List—Pedestal Base Installation 5050, 6450, 6458, 6464, 7676, & 8282 Dryers .....	34
Table 7	Front Legs 6458TG1L/R, TS1L/R 6464TG1L/R, TS1L/R .....	39
Table 8	Rear Legs 6458TG1L/R, TS1L/R 6464TG1L/R, TS1L/R .....	40
Table 9	Parts List—Pedestal Base 6458TG1L/R, TS1L/R 6464TG1L/R, TS1L/R .....	41
Table 10	Parts List—Unload Bridge Installation 5050, 6450, 6458, 6464, 7676, & 8282 Dryers .....	43
Table 11	Units of Measure .....	47
Table 12	Duct Sizes and Pressure Drops for Dryer Models .....	48
Table 13	Gas, Steam, and Air Intake - Newer Dryer Models .....	54
Table 14	Gas, Steam, and Air Intake - Older Dryer Models .....	55

# 1 Safety

BMP720097 / 25142

BRUUUM01.1 0000229985 B.2 E.2 3/31/25, 3:24 PM Released

## **PELLERIN MILNOR CORPORATION LIMITED STANDARD WARRANTY**

We warrant to the original purchaser that MILNOR machines including electronic hardware/software (hereafter referred to as "equipment"), will be free from defects in material and workmanship for a period of one year from the date of shipment (unless the time period is specifically extended for certain parts pursuant to a specific MILNOR published extended warranty) from our factory with no operating hour limitation. This warranty is contingent upon the equipment being installed, operated and serviced as specified in the operating manual supplied with the equipment, and operated under normal conditions by competent operators.

Providing we receive written notification of a warranted defect within 30 days of its discovery, we will—at our option—repair or replace the defective part or parts, EX Factory (labor and freight specifically NOT included). We retain the right to require inspection of the parts claimed defective in our factory prior to repairing or replacing same. We will not be responsible, or in any way liable, for unauthorized repairs or service to our equipment, and this warranty shall be void if the equipment is tampered with, modified, or abused, used for purposes not intended in the design and construction of the machine, or is altered in any way without MILNOR's written consent.

Parts damaged by exposure to weather, to aggressive water, or to chemical attack are not covered by this warranty. For parts which require routine replacement due to normal wear—such as gaskets, contact points, brake and clutch linings, belts, hoses, and similar parts—the warranty time period is 90 days.

We reserve the right to make changes in the design and/or construction of our equipment (including purchased components) without obligation to change any equipment previously supplied.

ANY SALE OR FURNISHING OF ANY EQUIPMENT BY MILNOR IS MADE ONLY UPON THE EXPRESS UNDERSTANDING THAT MILNOR MAKES NO EXPRESSED OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE OR PURPOSE OR ANY OTHER WARRANTY IMPLIED BY LAW INCLUDING BUT NOT LIMITED TO REDHIBITION. MILNOR WILL NOT BE RESPONSIBLE FOR ANY COSTS OR DAMAGES ACTUALLY INCURRED OR REQUIRED AS A RESULT OF: THE FAILURE OF ANY OTHER PERSON OR ENTITY TO PERFORM ITS RESPONSIBILITIES, FIRE OR OTHER HAZARD, ACCIDENT, IMPROPER STORAGE, MIS-USE, NEGLIGENCE, POWER OR ENVIRONMENTAL CONTROL MALFUNCTIONS, DAMAGE FROM LIQUIDS, OR ANY OTHER CAUSE BEYOND THE NORMAL RANGE OF USE. REGARDLESS OF HOW CAUSED, IN NO EVENT SHALL MILNOR BE LIABLE FOR SPECIAL, INDIRECT, PUNITIVE, LIQUIDATED, OR CONSEQUENTIAL COSTS OR DAMAGES, OR ANY COSTS OR DAMAGES WHATSOEVER WHICH EXCEED THE PRICE PAID TO MILNOR FOR THE EQUIPMENT IT SELLS OR FURNISHES.

THE PROVISIONS ON THIS PAGE REPRESENT THE ONLY WARRANTY FROM MILNOR AND NO OTHER WARRANTY OR CONDITIONS, STATUTORY OR OTHERWISE, SHALL BE IMPLIED.

WE NEITHER ASSUME, NOR AUTHORIZE ANY EMPLOYEE OR OTHER PERSON TO ASSUME FOR US, ANY OTHER RESPONSIBILITY AND/OR LIABILITY IN CONNECTION WITH THE SALE OR FURNISHING OF OUR EQUIPMENT TO ANY BUYER.

BMP720097/25142

BNUUUM01 / 2019342

BNUUUM01 0000250121 B.3 1/2/20, 2:14 PM Released

## 1.1 How to Get the Necessary Repair Components

BNUUUM01.C01 0000250120 A.3 B.2 B.3 1/2/20, 2:14 PM Released

You can get components to repair your machine from the approved supplier where you got this machine. Your supplier will usually have the necessary components in stock. You can also get components from the Milnor® factory.

Tell the supplier the machine model and serial number and this data for each necessary component:

- The component number from this manual
- The component name if known
- The necessary quantity
- The necessary transportation requirements
- If the component is an electrical component, give the schematic number if known.
- If the component is a motor or an electrical control, give the nameplate data from the used component.

To write to the Milnor® factory:

Pellerin Milnor Corporation  
Post Office Box 400  
Kenner, LA 70063-0400  
UNITED STATES

Telephone: 504-712-7775

Fax: 504-469-9777

Email: parts@milnor.com

BNUUUU02 / 2023296

BNUUUU02 0000158094 G.2 7/20/23, 10:58 AM Released

## 1.2 Trademarks

BNUUUU02.R01 0000158093 B.2 G.2 F.2 7/20/23, 10:57 AM Released

These words are trademarks of Pellerin Milnor® Corporation and other entities:

**Table 1. Trademarks**

AutoSpot™	GreenFlex™	MilMetrix®	PulseFlow®
CBW®	GearTrace™	MilTouch™	RAM Command™
Drynet™	GreenTurn™	MilTouch-EX™	RecircONE®
E-P Express®	Hydro-cushion™	MilRAIL®	RinSave®
E-P OneTouch®	Mentor®	Miltrac™	SmoothCoil™

Table 1 Trademarks (cont'd.)

E-P Plus®	Mildata®	MilVision™	Staph Guard®
Gear Guardian®	Milnor®	PBW™	

BNDUUS06 / 2021243

BNDUUS06

0000349888

B.2

6/8/21, 4:02 PM

Released

## 1.3 Safety — Pass Through Dryer

BNDUUS06.C01 0000349887 A.2 B.2 6/8/21, 4:02 PM Released

### 1.3.1 Safety Alert Messages—Internal Electrical and Mechanical Hazards

BNDUUS01.C03 0000239033 A.2 A.3 B.2 1/2/20, 1:40 PM Released

The following are instructions about hazards inside the machine and in electrical enclosures.



**WARNING: Electrocutation and Electrical Burn Hazards** — Contact with electric power can kill or seriously injure you. Electric power is present inside the cabinetry unless the main machine power disconnect is off.

- ▶ Do not unlock or open electric box doors.
- ▶ Do not remove guards, covers, or panels.
- ▶ Do not reach into the machine housing or frame.
- ▶ Keep yourself and others off of machine.
- ▶ Know the location of the main machine disconnect and use it in an emergency to remove all electric power from the machine.



**WARNING: Entangle and Crush Hazards** — Contact with moving components normally isolated by guards, covers, and panels, can entangle and crush your limbs. These components move automatically.

- ▶ Do not remove guards, covers, or panels.
- ▶ Do not reach into the machine housing or frame.
- ▶ Keep yourself and others off of machine.
- ▶ Know the location of all emergency stop switches, pull cords, and/or kick plates and use them in an emergency to stop machine motion.



**CAUTION: Burn Hazards** — Contact with hot goods or machine components can burn you.

- ▶ Do not remove guards, covers, or panels.
- ▶ Do not reach into the machine housing or frame.



## 1.3.2 Cylinder and Processing Hazards

BNDUUS02.C01 0000239083 A.2 B.2 1/2/20, 1:40 PM Released

## 1.3.3 Safety Alert Messages—Unsafe Conditions

BNDUUS03.C01 0000239106 A.2 B.2 1/2/20, 1:40 PM Released


### 1.3.3.1 Hazards Resulting from Inoperative Safety Devices

BNDUUS03.C03 0000239117 A.2 A.3 B.2 1/2/20, 1:40 PM Released



**WARNING: Multiple Hazards** — Operating the machine with an inoperative safety device can kill or injure personnel, damage or destroy the machine, damage property, and/or void the warranty.

- ▶ Do not tamper with or disable any safety device or operate the machine with a malfunctioning safety device. Request authorized service.



**WARNING: Electrocution and Electrical Burn Hazards** — Electric box doors—Operating the machine with any electric box door unlocked can expose high voltage conductors inside the box.

- ▶ Do not unlock or open electric box doors.



**WARNING: Entangle and Crush Hazards** — Guards, covers, and panels—Operating the machine with any guard, cover, or panel removed exposes moving components.

- ▶ Do not remove guards, covers, or panels.



**WARNING: Fire Hazards** — Sprinkler and overheat control—Failure to supply water to the sprinkler or to open the manual valve, or failure of the overheat control, eliminates the machine's internal fire protection. Normally the machine stops and water is sprayed into the cylinder if outlet temperature reaches 240 degrees Fahrenheit (116 degrees Celsius).

- ▶ Verify the overheat control system and plant fire extinguishers are functioning before operating the machine. Be sure to turn water supply on after testing.
- ▶ Keep the manual shut-off test valve open except when testing.
- ▶ Test or inspect the system after every automatic actuation, or monthly.



**WARNING: Explosion and Fire Hazards** — Gas train—Operating the machine with damaged or malfunctioning gas valves, safeties, controls, or piping can permit gas to escape into the fire box, cylinder, or laundry room. The enclosure will explode if gas comes in contact with any spark or flame.

- ▶ Do not operate the machine with any evidence of damage or malfunction.
- ▶ Stop the machine immediately and alert authorities if you smell gas.

### 1.3.3.2 Hazards Resulting from Damaged Mechanical Devices

BNDUUS03.C04 0000239116 A.2 A.3 B.2 1/2/20, 1:40 PM Released



**WARNING: Multiple Hazards** — Operating a damaged machine can kill or injure personnel, further damage or destroy the machine, damage property, and/or void the warranty.

- ▶ Do not operate a damaged or malfunctioning machine. Request authorized service.

### 1.3.4 Careless Use Hazards

BNDUUS03.C05 0000239115 A.2 B.2 1/2/20, 1:40 PM Released

#### 1.3.4.1 Careless Operation Hazards—Vital Information for Operator Personnel (see also operator hazards throughout manual)

BNDUUS03.C06 0000239114 A.2 A.3 B.2 1/2/20, 1:40 PM Released



**WARNING: Multiple Hazards** — Careless operator actions can kill or injure personnel, damage or destroy the machine, damage property, and/or void the warranty.

- ▶ Do not tamper with or disable any safety device or operate the machine with a malfunctioning safety device. Request authorized service.
- ▶ Do not operate a damaged or malfunctioning machine. Request authorized service.
- ▶ Do not attempt unauthorized servicing, repairs, or modification.
- ▶ Do not use the machine in any manner contrary to the factory instructions.
- ▶ Use the machine only for its customary and intended purpose.
- ▶ Understand the consequences of operating manually.




**CAUTION: Goods Damage and Wasted Resources** — Entering incorrect cake data can cause improper processing, routing, and accounting of batches.

- ▶ Understand the consequences of entering cake data.

#### 1.3.4.2 Careless Servicing Hazards—Vital Information for Service Personnel (see also service hazards throughout manuals)

BNDUUS03.C07 0000239113 A.2 A.3 B.2 1/2/20, 1:40 PM Released



**WARNING: Electrocution and Electrical Burn Hazards** — Contact with electric power can kill or seriously injure you. Electric power is present inside the cabinetry unless the main machine power disconnect is off.

- ▶ Do not service the machine unless qualified and authorized. You must clearly understand the hazards and how to avoid them.

- ▶ Abide by the current OSHA lockout/tagout standard when lockout/tagout is called for in the service instructions. Outside the USA, abide by the OSHA standard in the absence of any other overriding standard.



**WARNING: Entangle and Crush Hazards** — Contact with moving components normally isolated by guards, covers, and panels, can entangle and crush your limbs. These components move automatically.

- ▶ Do not service the machine unless qualified and authorized. You must clearly understand the hazards and how to avoid them.
- ▶ Abide by the current OSHA lockout/tagout standard when lockout/tagout is called for in the service instructions. Outside the USA, abide by the OSHA standard in the absence of any other overriding standard.



**WARNING: Confined Space Hazards** — Confinement in the cylinder can kill or injure you. Hazards include but are not limited to panic, burns, poisoning, suffocation, heat prostration, biological contamination, electrocution, and crushing.

- ▶ Do not enter the cylinder until it has been thoroughly purged, flushed, drained, cooled, and immobilized.

BNDTUI01 / 2025285

BNDTUI01

0000765240

7/21/25, 4:02 PM

Released

## 1.4 Installation Tag Guidelines

BNDTUI01.R01 0000765239 B.2 A.4 7/21/25, 4:02 PM Released

5050SA1L	5050SA1R	5050TS1L	5050TS1R	6458TS1L	6458TS1R	6458TT1L
6458TT1R	6464TS1L	6464TS1R	7676TS1L	7676TS1R	8282TS1L	8282TS1R
MT140S1L	MT140S1R	DRYVAC02	DRYVAC03			





**NOTICE:** This information may apply to models in addition to those listed above. It applies to paper tags. It does not apply to the vinyl or metal safety placards, which must remain permanently affixed to the machine and replaced if no longer readable.

Paper tags on the machine provide installation guidelines and precautions. The tags can be tie-on or adhesive. You can remove tie-on tags and white, adhesive tags after installation. Yellow adhesive tags must remain on the machine.

The following entries explain the installation tags. Each entry includes: 1) the tag illustration, 2) the tag part number at the bottom of the tag, and 3) the meaning of the tag.



## Symbol

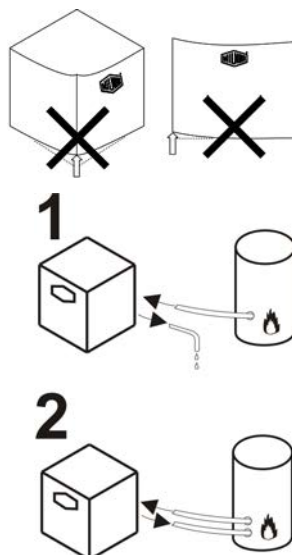

## Explanation

Read the manuals before proceeding. This symbol appears on most tags. The machine ships with safety, operator, and routine maintenance guides for customer use. Milnor dealer manuals for installing, commissioning, and servicing the machine are also available from the Milnor Parts department.

B2TAG88005: This carefully built product was tested and inspected to meet Milnor performance and quality standards by (identification mark of tester).

B2TAG94078: Do not forklift here; do not jack here; do not step here—whichever applies.


B2TAG94079: Rig for crane lifting (either 3-point or 4-point, depending on the number of lifting eyes provided) using a steep angle on the chains (closer to vertical than horizontal).

B2TAG94081: Motor must rotate in this direction. On single motor washer-extractors and centrifugal extractors, the drive motor must turn in this direction during draining and extraction. This tag is usually wrapped around a motor housing. If the motor turns in the opposite direction when the machine is first tested, the electrical hookup is incorrect and must be reversed as explained in the schematic manual.

B2TAG94084: Do not lift from one corner of the machine, as this can cause the frame to rack, damaging it.

B2TAG94091: Drain the condensate to the sewer during first one hour after commissioning a new machine or replacing the steam coil. This flushes out any residual anti-freeze that might be in the steam coil. After one hour, condensate can be returned to the boiler.

## Symbol




## Explanation

B2TAG94101: The dryer has a rearward center of gravity and must be firmly anchored to the floor at all four corners.



B2TAG94102 shown—others similar: Match up the components with this number. These tags are used to pair up electrical or hose connections between major components of a machine shipped disassembled.




B2TAG94118: Do not strike shipping container during fork-lifting. Fragile components inside.



B2T2001017: Foam seal must be installed here before dryers are bolted together.



B2T2002013: Do not start the machine until shipping restraints are removed. This tag will appear on the outside of the machine to alert you to the presence of internal shipping restraints. A tag will also appear on the restraint to help identify it. Most, but not all shipping restraints display the color red. Some shipping restraints are also safety stands. Do not discard these.



This Control Box is mounted here for shipping purposes only

B2T2007003: Install the shuttle rail in accordance with this instruction and the installation manual.

B2T2014022: This control box is mounted here for shipping purposes only. (Only used on 64" and 76" gas and steam dryers with a blower inverter.)

This page intentionally blank

BPDUUM07 / 2022484

BPDUUM07.1 0000538339 A.3 B.2 11/23/22, 9:26 AM Released

## Guards and Covers

4 Sheets

6450, 6458, 6464, 7676, 8282 Dryers




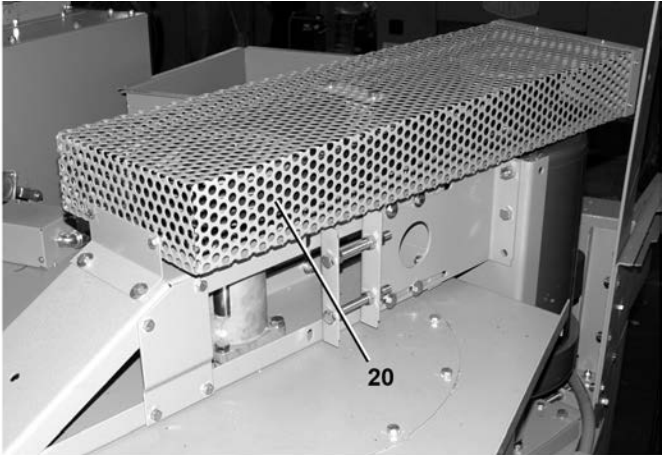






**NOTE:** Dryer side panels are only supplied on Stand-Alone Dryers and used on the side opposite the blower.

# Guards and Covers

6450, 6458, 6464, 7676, 8282 Dryers

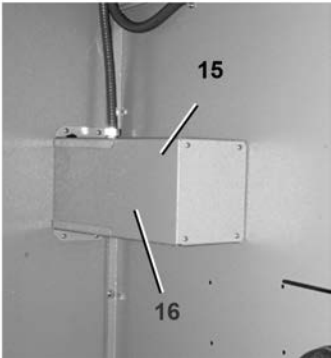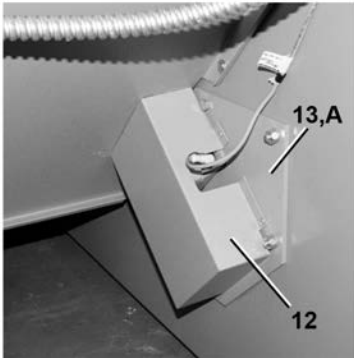4 Sheets



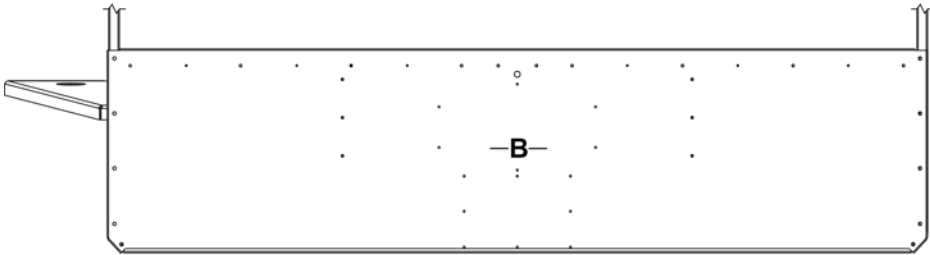

**Legend**

**A** . . . Standard shroud bearing cover


**B** . . . Short shroud

**C** . . . Short shroud bearing

## Guards and Covers

6450, 6458, 6464, 7676, 8282 Dryers

4 Sheets

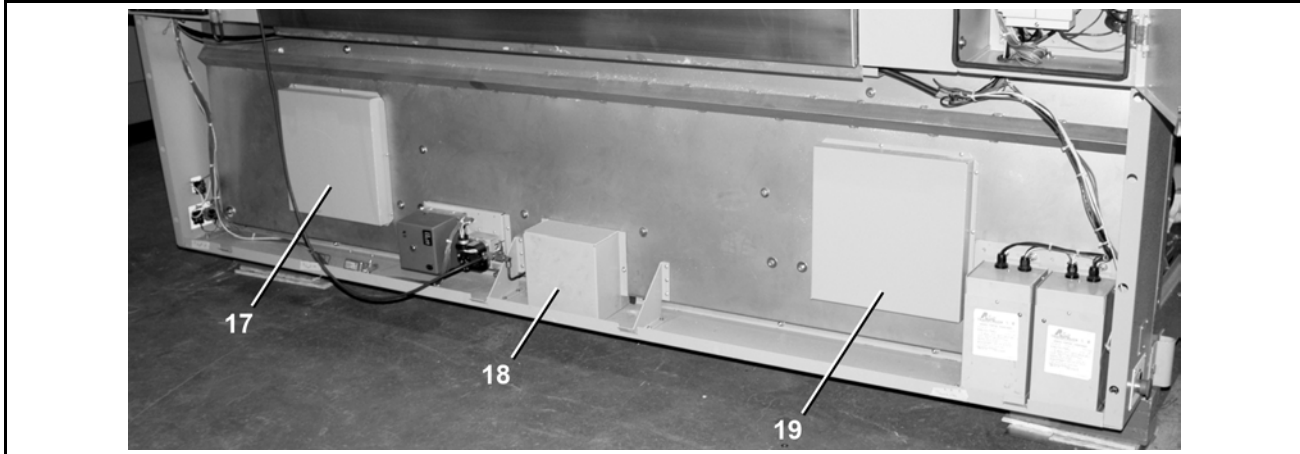

**Table 2. Parts List—Guards and Covers**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.

Used In	Item	Part Number	Description/Nomenclature	Comments
Reference Assemblies				
	A			6450 Dryers
	B			6458 Dryers
	C			6464 Dryers
	E			7676 Dryers
	F			8282 Dryers
Components				
B	3	A77SC001	6458 LOWER SIDE COVER ASSY	
C	3	A77SC010	6464 LOWER SIDE COVER ASSY	
E	3	A79SC001	7272 LOW CVR BLOWER SIDE	
B	4	07 71397	6458 HOUSE SIDE PLATE UPPER	
AC	4	07 72029	6464 HOUSE SIDE PLATE UPPER	
E	4	07 85397	7676 HOUSE SIDE PLATE	
F	4	07 88073	8282 HOUSE SIDE PANEL	
B	5	07 71435	6458 LINT SIDE LOWER COVER	
AC	5	07 72028	6464 LOWER SIDE COVER	
E	5	07 85397	7676 HOUSE SIDE PLATE	
F	5	07 88073	8282 HOUSE PANEL	
ABC	6	W7 71205A	64" DRYER FRONT COSMETIC LOWER DOOR WELD	
E	6	W7 85205	7676 FRONT COSMETIC LOWER DOOR HINGED WLMT	
F	6	W7 88102	8282 FRONT COSMETIC LOWER DOOR HINGED WLMT	
all	7	W3 D1356L	WELD:DOOR 6458TG1 DRYER LF LV	

## Guards and Covers

4 Sheets

6450, 6458, 6464, 7676, 8282 Dryers

Table 2 Parts List—Guards and Covers (cont'd.)

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
A	8	07 71201A	6464 FRONT COSM UPPER	
BC	8	07 71201W	6458 FRONT COSM UPPER	
E	8	07 85201	7676 COSMETIC UPPER MID COVER	
F	8	W7 88111	8282 FRONT COSMETIC UPPER MID COVER WLMT	
all	9	03 D1356R	DOOR: 6458TG1L DRYER HV	
ABC	10	07 71204W	6458 COSM LOWER THRESHOLD	
EF	10	07 81204	7272 FRONT COS THRESHOLD	
all	11	07 50428	SPRINKLER VALVE COVER DRYER	
ABC	12	07 71317	6458 REAR BEARING COVER	STANDARD SHROUD
E	12	07 81317	64,72,76" DRYER REAR BEARING COVER	STANDARD SHROUD
F	12	07 88125	8282 REAR BEARING COVER	STANDARD SHROUD
all	13	07 81280	64-76" DRYER SUPPORT BEAR MTG PLT	
all	15	07 71306	6458 TEMP PROBE BOX	
all	16	07 71307	6458 TEMP PROBE BOX COVER	
ABCE	17	07 71231	COVER BRG NO HOLE LF END	
F	17	07 88110	8282 FRONT BEARING COVER	
ABCE	18	W7 50129	64" DRYER GUIDE ROLLER COVER	
F	18	07 88117	8282 GUIDE ROLLER COVER	
all	19	07 71231A	COVER BRG NO HOLE RT END	
A	20	A7 50268C	6450 LF BLWR BELT GUARD ASMBLY - ANGLED	LEFT
A	20	A7 50268CA	5050 LF BLOWER BELT GUARD- ANGLED ASMBLY	RIGHT
BC	20	A77BA002	64" DRYER BLOWER BELT GUARD ASSY	
EF	20	A79BA002	72/76/82" DRYER BLOWER BELT GUARD ASSY	
all	21	27A108A	HINGE LIFTOFF LH EMKA#1056-U62 BLACK	
all	22	27A108B	HINGE LIFTOFF RH EMKA#1056-U63 BLACK	
E	23	W7 71317B	50-76" DRYER BRNG CVR SHORT-LEFT	SHORT SHROUD
F	23	A82BC001	8282 BRNG COVER SHORT ASSEMBLY	SHORT SHROUD
E	24	W7 71317D	50-76" DRYER BRNG CVR SHORT-RIGHT	SHORT SHROUD
F	24	A82BC001	8282 BRNG COVER SHORT ASSEMBLY	SHORT SHROUD
all	25	60A114	SELF-GRIP GASKET EMKA 1011-17	


BPDD6M01 / 2022502

BPDD6M01.1 0000544522 B.2 A.5 12/7/22, 8:03 AM Released

## Unload Shrouds

3 Sheets

6458TG1L/R, TS1L/R; 6464TG1L/R, TS1L/R; 7676TG1L/R; 8282TG1L/R

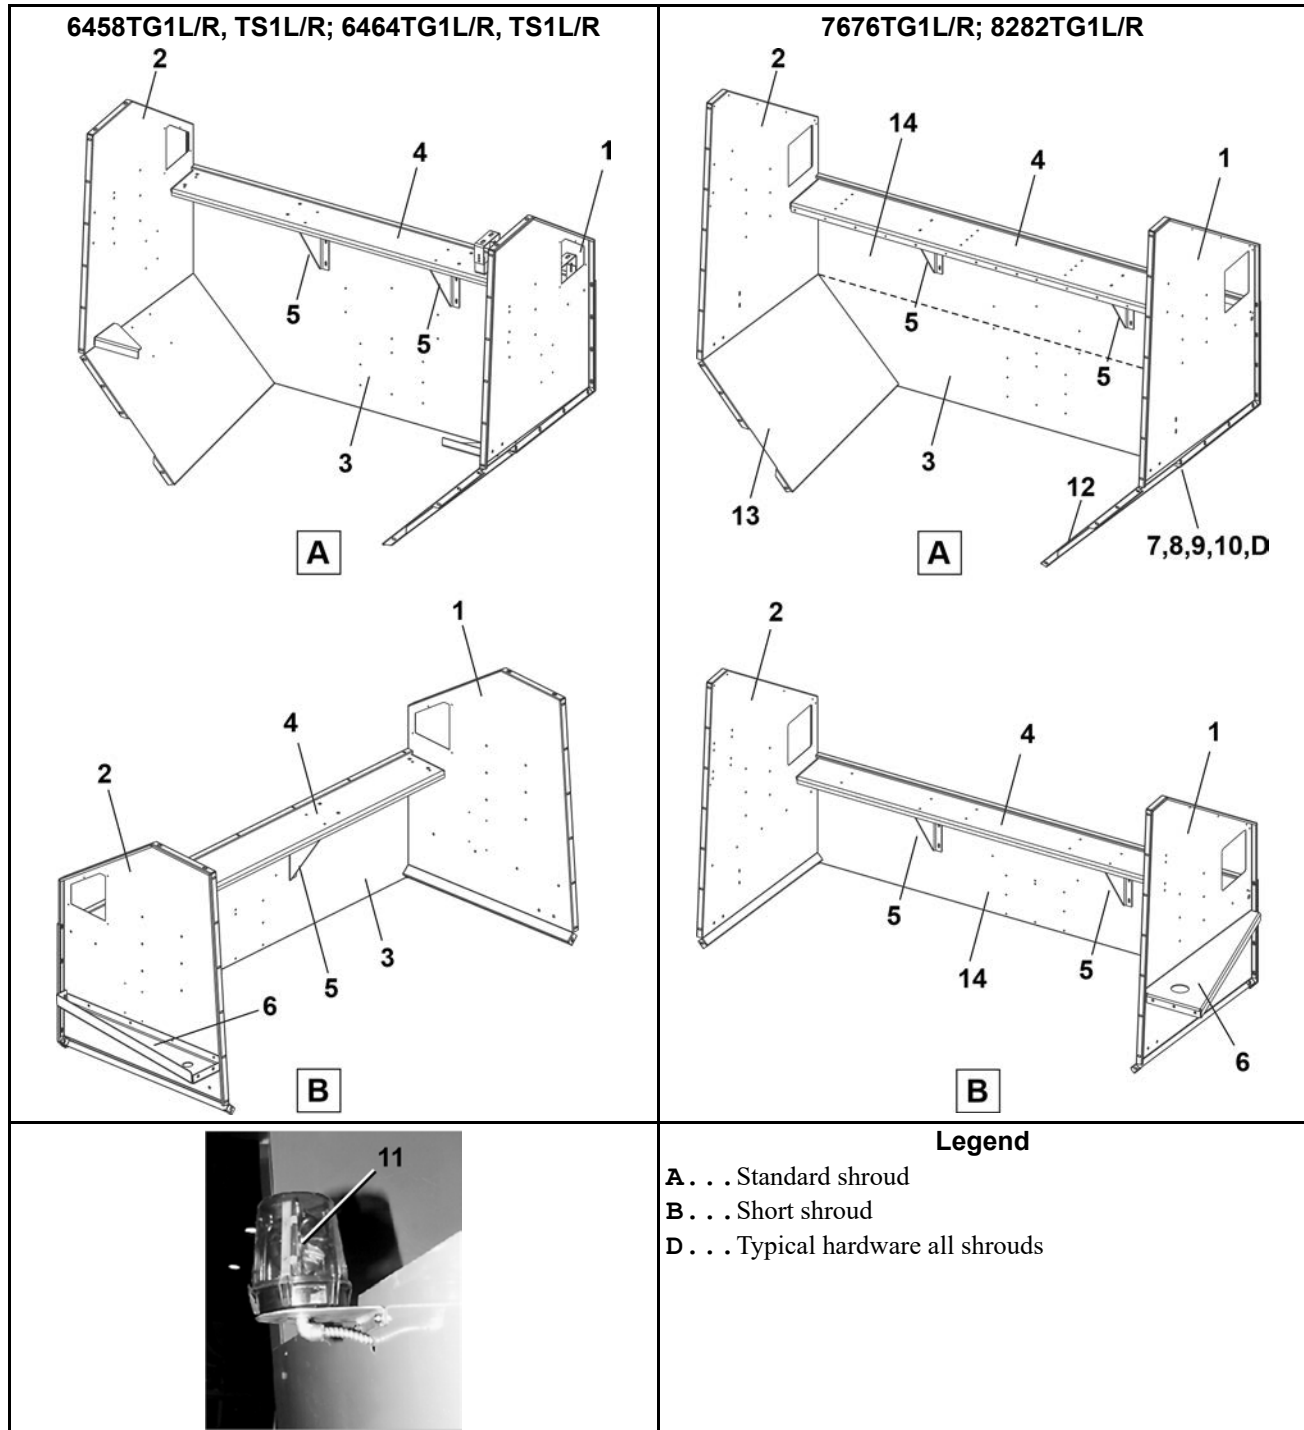




## Unload Shrouds

3 Sheets

6458TG1L/R, TS1L/R; 6464TG1L/R, TS1L/R; 7676TG1L/R; 8282TG1L/R

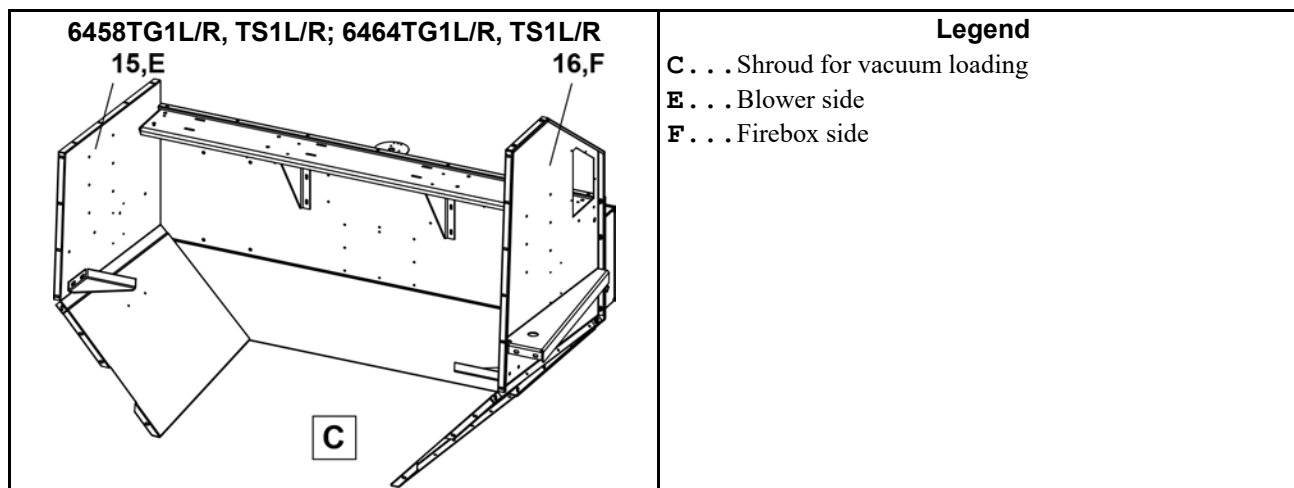

**Table 3. Parts List—Unload Shrouds**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Reference Assemblies				
	A			6458/6464 STANDARD SHROUD
	B			7676 STANDARD SHROUD
	C			6458/6464 SHORT SHROUD
	D			7676 SHORT SHROUD
	E			8282 STANDARD SHROUD
	F			8282 SHORT SHROUD
	G			6458/6464 VACUUM LOADING SHROUD
Components				
A	1	07 71150A	6458 UNLOAD SHROUD RIGHT	
B	1	07 71505C	64" DRYER SHROUD SHORT CHAMFER - RT	
C	1	07 85150	7676 UNLOAD SHROUD RIGHT	
D	1	07 81505	7272 UNLOAD SHROUD RT SHORT	
EF	1	07 88123	8282 SHROUD SHORT CHAMFER-RT	
A	2	07 71150B	6458 UNLOAD SHROUD LEFT	
B	2	07 71505D	64" DRYER SHROUD SHORT CHAMFER-LF	
C	2	07 85151	7676 UNLOAD SHROUD LEFT	
D	2	07 81505A	7272 UNLOAD SHROUD LF SHORT	

## Unload Shrouds

3 Sheets

6458TG1L/R, TS1L/R; 6464TG1L/R, TS1L/R; 7676TG1L/R; 8282TG1L/R

**Table 3 Parts List—Unload Shrouds (cont'd.)**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
EF	2	07 88123A	8282 SHROUD SHORT CHAMFER-LT	
A	3	07 71152	6458 UNLOAD SHROUD BACK PLT	
B	3	07 71506	6458 UNLOAD SHROUD BACK =SHT	
C	3	07 85152	7676 UNLOAD SHROUD BACK PLT	
D	3	07 85152A	7676 UNLD SHROUD BACK-SHORT	
EF	3	07 88121	8282 UNLOAD SHROUD EXTENSION BACK	
AB	4	07 71154	64"DRYER GAS PIPE SUPP PLT	
CD	4	07 85154	7676 SHROUD GAS PIPE SUPPORT PLATE	
EF	4	07 88122	8282 GAS PIPE SUPP PLT	
all	5	07 71156	6458 PIPE SUPP GUSSET BKT	
AB	E6	W7 71507	6458 SHORT SHROUD GUSSET LFT	
CD	6	W7 81507	7272 SHORT SHROUD GUSSET LF	
EF	6F	07 88126	8282 SHORT SHROUD GUSSET	
all	7	15K037	HEXCAPSCR 1/4-20UNC2AX5/8 GR5	
all	8	15U180	LOCKWASHER MEDIUM 1/4 ZINCPL	
all	9	15U185	FLATWASHER(USS STD) 1/4" ZNC P	
all	10	15G165	HXNUT 1/4-20UNC2BSAE ZC GR2	
all	11	09H026V37	BEACON ROTARY 90MM AMBER CE	
E	12	07 88120	8282 UNLOAD SHROUD EXTENSION RIGHT	
E	13	07 88120A	8282 UNLOAD SHROUD EXTENSION LEFT	
EF	14	07 88124	8282 UNLOAD SHROUD BACK PLT	
G	15	07 71505E	6458 RT VAC LOADING SHROUD BLOWER SIDE	
G	16	07 71505H	6458 RT VAC LOADING SHROUD FB SIDE	


## 2 Installation

# ATTENTION INSTALLERS!




## FLOOR IS UNEVEN

- Establish System Zero Line or Z.
- Find highest point in factory floor where footpads will be located.
- System Zero Line or Z is 1" above highest point.

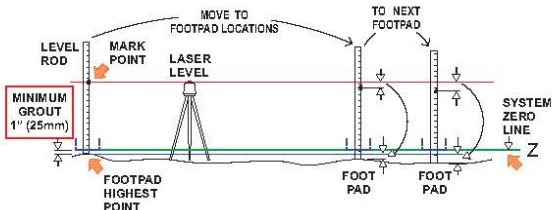


## SHUTTLE RAIL BRACKETS MUST BE GROUTED TO Z

- Shim & level to System Zero Line or Z.
- Grout & anchor all brackets.

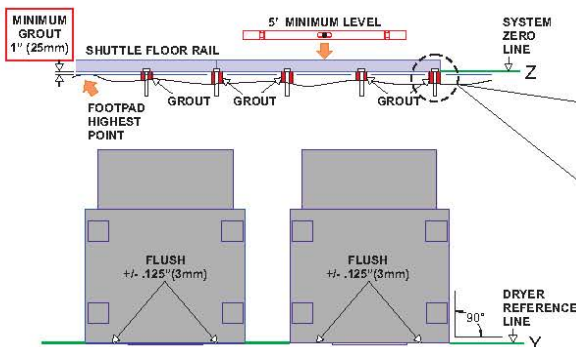

## DRYER FACES MUST BE FLUSH

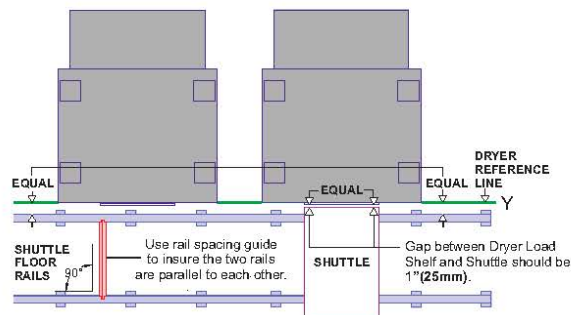


## SHUTTLE RAILS MUST BE PERFECTLY PARALLEL TO DRYER FACES


- Floor rails must be parallel, level, and square along entire length of rail.

## DRYER FEET MUST BE GROUTED

- Shim & level to System Zero Line or Z.
- Grout & anchor all brackets.

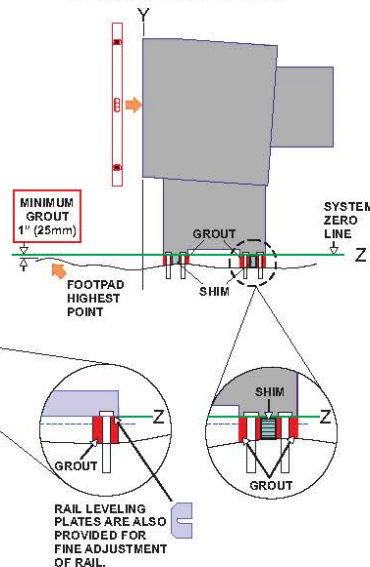

## DRYER MUST BE LEVEL

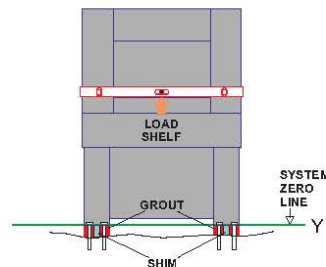

B2T2007003/2019193A

BNDUII02 / 2025226

BNDUII02 0000765280 B.2 5/30/25, 3:13 PM Released

## 2.1 Dryer Assembly and Setting

BNDUII02.C01 0000765279 A.2 B.2 5/30/25, 3:13 PM Released

This document gives general instructions for shippers and installers. Several other documents in the installation manual provide more detailed instructions on specific tasks related to installation. Review all of the installation-related documents before proceeding.

### 2.1.1 Handling Precautions

BNDUII02.T01 0000765278 A.2 B.2 5/30/25, 3:13 PM Released

The machine is disassembled at the Milnor® factory in two or more assemblies: the main dryer housing, the pedestal base, and if necessary, one or more other assemblies. The machine is shipped from the Milnor® factory in three or more containers. Major assemblies are palletized or skidded and there are one or more boxes containing loose parts such as connecting brackets.

1. Remove the protective coverings (leaving the machine on its shipping skids) and examine the components carefully for possible shipping damage. If the machine is damaged, notify the transportation company immediately.




**NOTE:** Once the machine is given to the **carrier** for delivery, it is the sole responsibility of the carrier to ensure that no damage occurs during transit. In addition to readily apparent damage, carriers are liable for concealed damage. **Do not hesitate to file a claim with the carrier if the machine has been damaged in any way during shipment.** Milnor® will be glad to assist you in filing your claim, but is not responsible for shipping damage to the machine once it has been delivered to the carrier in good condition.


2. Lifting brackets are provided on the top of the house and are tagged as such. Spreader bars are mounted between the lifting brackets. The lifting brackets must be used if lifting by crane.
3. Use the skids for fork lifting and, if possible, leave the machine on its shipping skids until it is about to be assembled and placed in its final position. Once the skids are removed, take care in placing forks under the machine. **Do not allow the forks to come in contact with valves, piping, etc., located on the machine.**
4. Never push, pull, or exert pressure on any components that protrude from the machine frame.
5. Consult the Milnor® factory if components such as the blower housing must be removed to fit machine through openings.

Some dryers are paired for installation immediately adjacent to each other. When installing these machines, the spreader bar mounting bolts ([Figure 3: Spreader Bar Between Front Lifting Plates, page 24](#)) are inaccessible once the machines are mounted side by side. Remove the spreader bar immediately after installing the legs, before setting or anchoring dryer. Do not remove the lift plates as they are used to tie machines together.

**Figure 1. Front Lifting Bracket**

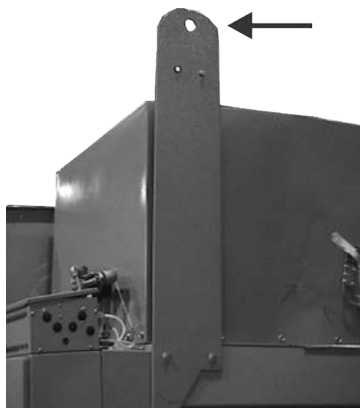


**Figure 2. Rear Lifting Bracket**

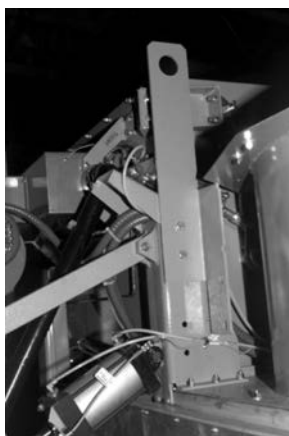

**Figure 3. Spreader Bar Between Front Lifting Plates**



**Figure 4. Apply sealing foam to left house before setting into position**

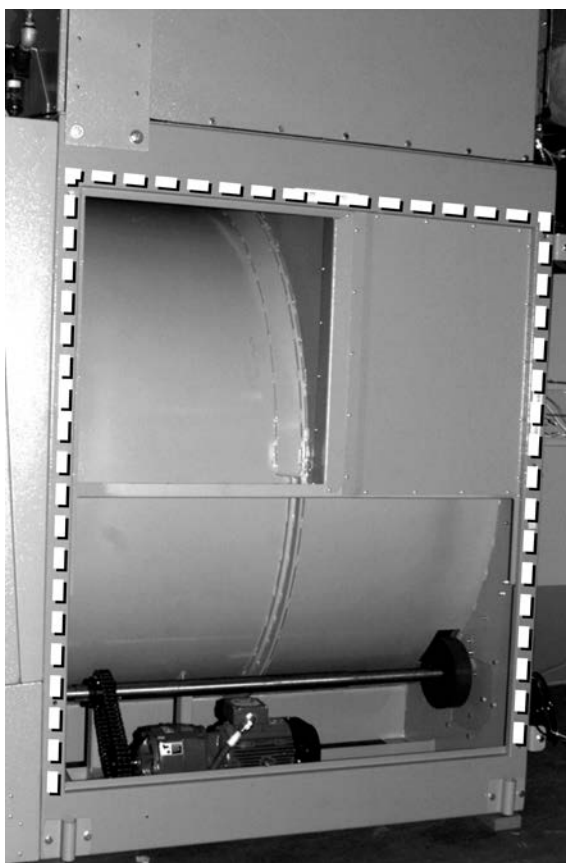

## 2.1.2 Site Requirements

BNDUII02.C02 0000765276 A.2 B.2 5/30/25, 3:13 PM Released

### 2.1.2.1 Dryer Environment

BNDUII02.C03 0000765275 A.2 B.2 5/30/25, 3:13 PM Released

The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

### 2.1.2.2 Clearances

BNDUII02.C04 0000765591 A.2 B.2 5/30/25, 3:13 PM Released

Observe the following:

- Sufficient clearances must exist to move the machine into the laundry. All openings and corridors through which equipment must pass must be of sufficient size to accommodate the sizes of the skidded assemblies (see the dimensional drawing). It is occasionally possible to reduce the overall dimensions by removing piping and by other special modifications. Consult the Milnor® factory for more information.
- Provide sufficient clearance around machine for normal operation and maintenance procedures.
- Ensure sufficient clearance between hot surfaces, such as the dryer exhaust vent, and any combustible building materials.
- Ensure sufficient ventilation exists for the heat and vapors of normal operation to dissipate.
- Provide adequate airflow for optimum machine performance. Normally, this means connecting the machine to an outside air source.

### 2.1.2.3 Foundation

BNDUII02.C05 0000765590 A.2 B.2 5/30/25, 3:13 PM Released

The machine must be anchored in accordance with the installation instructions. The floor and/or all other support components must have sufficient strength (and rigidity with due consideration for the natural or resonant frequency thereof) to withstand the fully loaded weight of the machine including the wet goods and any repeated sinusoidal (rotating) forces generated during its operation. Determining the suitability of floors, foundations, and other supporting structures normally requires analysis by a qualified structural engineer.

## 2.1.3 Assembly

BNDUII02.C06 0000765589 A.2 B.2 5/30/25, 3:13 PM Released

### 2.1.3.1 Installing the Legs on the House

BNDUII02.C07 0000765588 A.2 B.2 5/30/25, 3:13 PM Released

It is usually easiest to install the legs on the house then use a fork lift to set the machine in place.

1. Read all related tags prior to assembly.
2. Verify that the doors are closed and secured.
3. Unfasten house from the shipping skid. Once skids are removed, take care in placing forks under the machine. **Do not allow forks to come in contact with valves, piping, motors, etc., located under the machine.**

4. Install the provided foam seal along the path indicated by decals on the machine. This seal is only installed on the left side machine of a left and right pair ([Figure 4: Apply sealing foam to left house before setting into position, page 24](#) ).
5. Raise the house using the three designated lifting plates located on the top of the machine.
6. Install the legs and filler plates on the house.
7. Remove the spreader bar ([Figure 3: Spreader Bar Between Front Lifting Plates, page 24](#) ).
8. Carefully move the machine into place.
9. Repeat the assembly process as required for the adjacent machine (if paired).

### 2.1.3.2 Anchoring

BNDUUI02.C08 0000765587 A.2 B.2 5/30/25, 3:13 PM Released



**WARNING: Crush and Machine Damage Hazards** — This machine has a rearward center of mass.

- ▶ Install anchor bolts as soon as machine is in position and before making service connections. Install anchor bolts in accordance with the dimensional drawing.
- ▶ Keep bystanders clear of machine during installation.

Machines must be securely anchored to an adequate foundation. Anchor bolt locations and foundation specifications are provided on the dimensional drawing. However, do not install anchor bolts until the machine is on site so that the machine itself may be used to determine precise anchor bolt locations. Consult Milnor® if any obstruction prevents the installation of any anchor bolts. **Anchor bolts cannot be indiscriminately omitted.**

### 2.1.3.3 Leveling Procedures

BNDUUI02.C09 0000765586 A.2 B.2 5/30/25, 3:13 PM Released

1. Establish System Zero Line or Z. Find the highest point in the factory floor where footpads will be located. The system Zero Line or Z is 1"(25MM) above the highest point.
2. Install the anchor bolts.
3. Level with leveling bolts until the bottom of the pedestal feet are on System Zero Line or Z. **Level both left to right and front to back.**
4. Use a carpenter's level to verify that the machine is level.
5. Dryer feet must be grouted. Grout all footpads.
6. Tighten all foundation bolts until they contact the top of the base plates.
7. Tighten all the bolts evenly, **one-quarter of a turn each time on every bolt** until all bolts are uniformly tight. After tightening, check each fastener separately at least twice.

### 2.1.3.4 Machine-to-Machine Brackets


BNDUUI02.C10 0000765585 A.2 B.2 5/30/25, 3:13 PM Released

Machine to machine brackets hold paired dryers in place after each machine is anchored and leveled. Install these brackets as follows:



- Install the rear brackets ([Figure 5: Machine-to-Machine Brackets and Spacers, page 27](#)).
- Assemble front machine-to-machine leg bracket. Mark and drill mounting holes and install the leg bracket ([Figure 5, page 27](#)).
- Install bolts between the front lift plates of adjacent machine pairs. Do not tighten bolts at this time.
- Slide the lift plate spacers in between the front lift plates ([Figure 5, page 27](#)). Tighten bolts when done.

**Figure 5. Machine-to-Machine Brackets and Spacers**

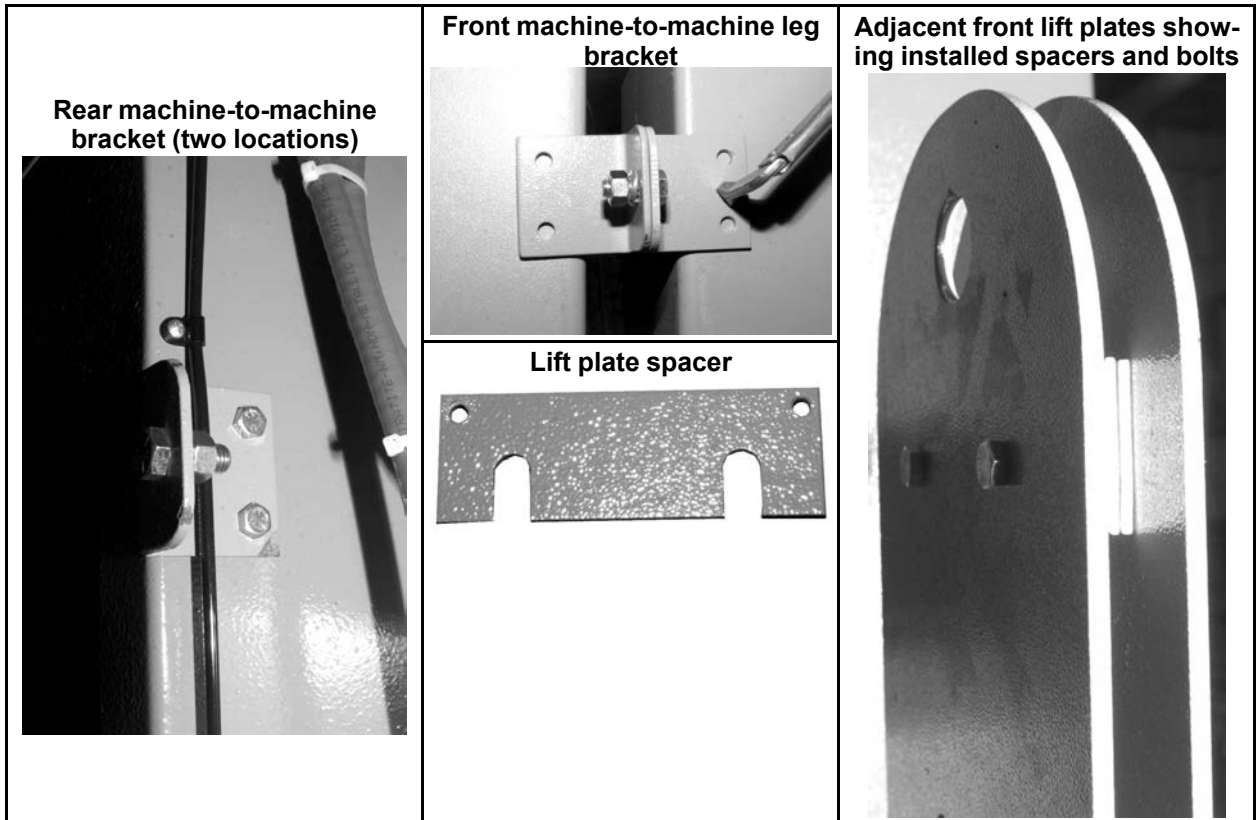

### 2.1.3.5 Check Cylinder Interior

BNDUUI02.C11 0000765584 A.2 B.2 5/30/25, 3:13 PM Released

Check the interior of the perforated cylinder for smoothness before placing the machine in service. Milnor® cannot accept claims for damage to the cylinder's smooth finish after the machine has been placed in service.

BPDUUK01 / 2022245

BPDUUK01.1 0000481017 B.2 6/5/25, 10:01 AM Released

## Lifting Brackets

2 Sheets

5050, 6450, 6458, 6464, 7676, 8282 Dryers

Figure 6. 5050, 6450, 6458, 6464, 7676, and 8282 Dryers (7676 Shown)


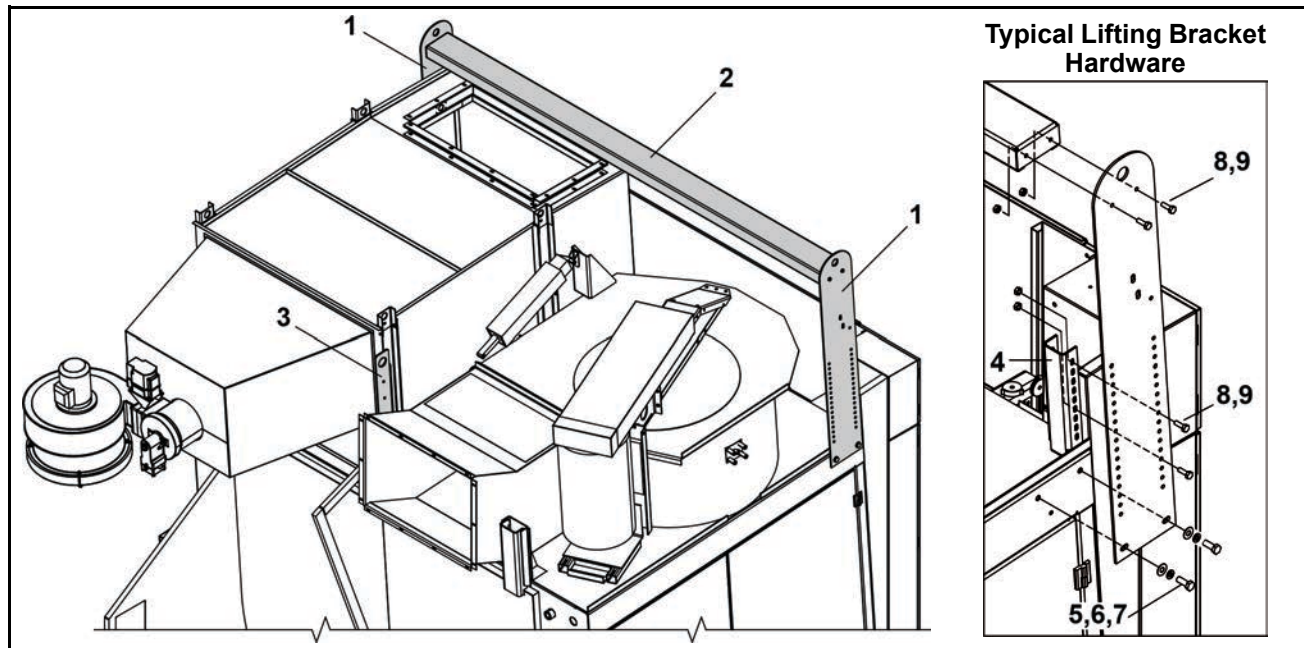


Figure 7. 8282 Dryers

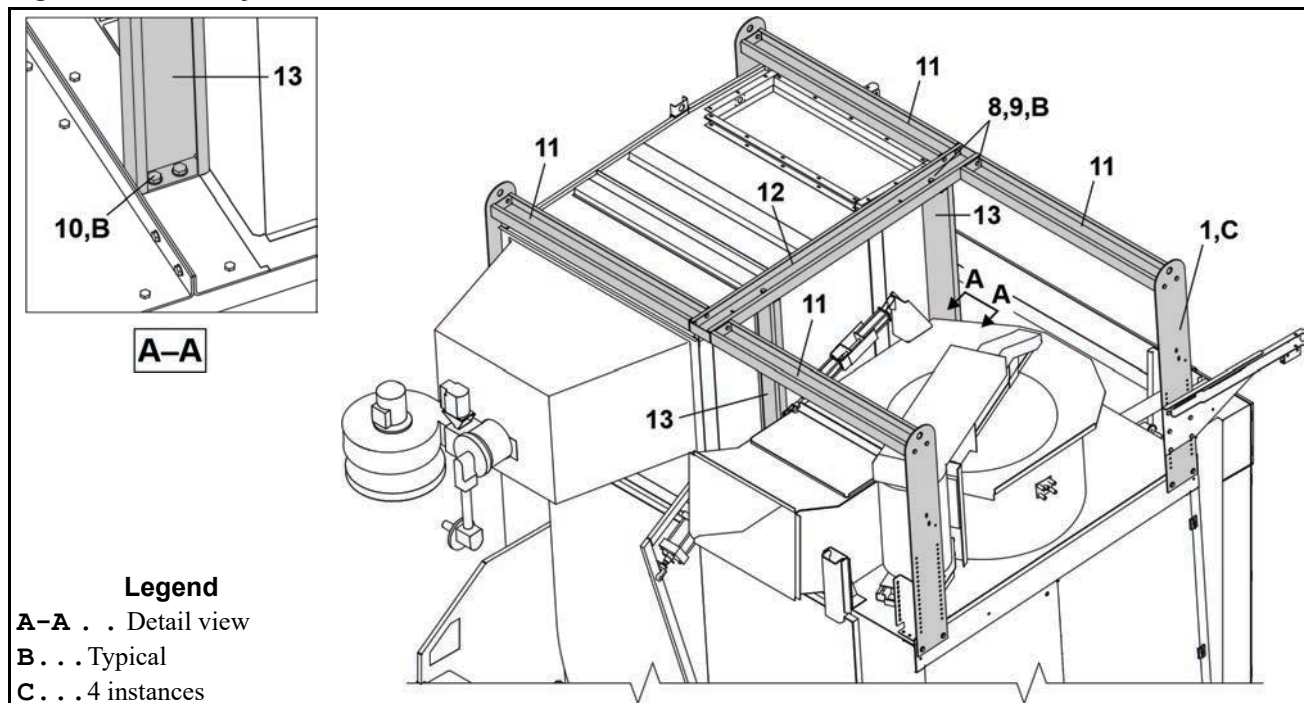

## Lifting Brackets

2 Sheets

5050, 6450, 6458, 6464, 7676, 8282 Dryers

Table 4. Parts List—Lifting Brackets

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Reference Assemblies				
B			5050 DRYERS	
C			6450 DRYERS	
D			6458 DRYERS	
E			6464 DRYERS	
G			7676 DRYERS	
H			8282 DRYERS	
Components				
BDE	1	07 71315	DRYER LIFT BRKT STANDARD=41.50	
C	1	07 71315B	6450 DRYER LIFT BRKT=44.50	
G	1	07 85315A	DRYER LIFT BRKT TALL=51.50	
H	1	07 88092	8282 DRYER LIFT BRKT	
B	2	07 44075	5040 LIFT BRKT LONG SPREADER	
C	2	07 71316	6458 LIFT BRKT LONG SPREADER	
DE	2	07 81316	7272 LIFT BRKT LONG SPREADER	
H	2	07 88093	8282 SPREADER BAR CENTER STIFF	
B	3	07 44076	5040 REAR LIFTING BRACKET	
CDE	3	07 71183A	6458A REAR LIFTING BRACKET	
G	3	07 71183B	DRYER REAR CHANNEL LIFTING BRACKET	
H	3	07 88096	8282 VT LIFTING BRKT	
B-H	4	07 71439	6458 RAILSUPP CORNER BRKT	
all	5	15K173A	HXCAPSCR 1/2-13UNC2AX1.75 GR5	
all	6	15U280	FL+WASHER(USS STD)1/2 ZNC PL+D	
all	7	15U300	LOKWASHER REGULAR 1/2 ZINC PLT	
all	8	15K105	HXCAPSCR 3/8-16UNC2A1.25 GR5 P	
all	9	15G198	HXFLGNUT 3/8-16 ZINC	





BPDUUM03 / 2022252

BPDUUM03.1 0000481076 B.2 A.7 6/14/22, 11:03 AM Released

## Dryer to Dryer Mounting Parts

2 Sheets

5050, 6450, 6458, 6464, 7676, 8282 Dryers

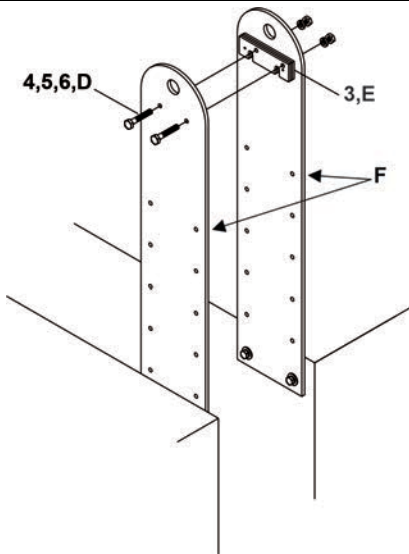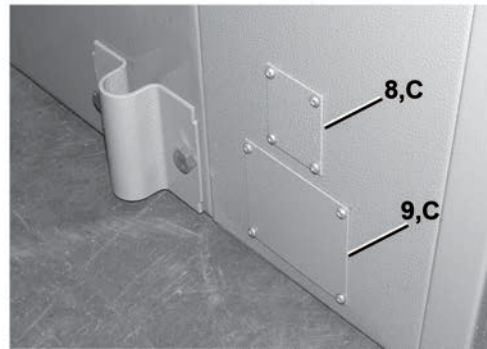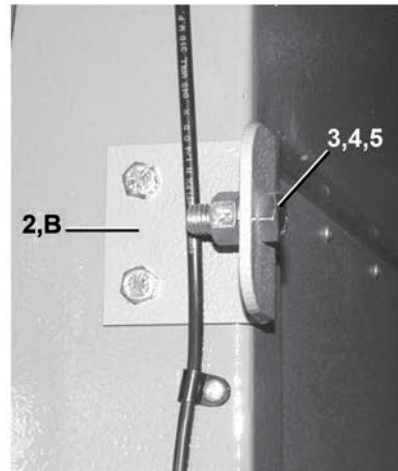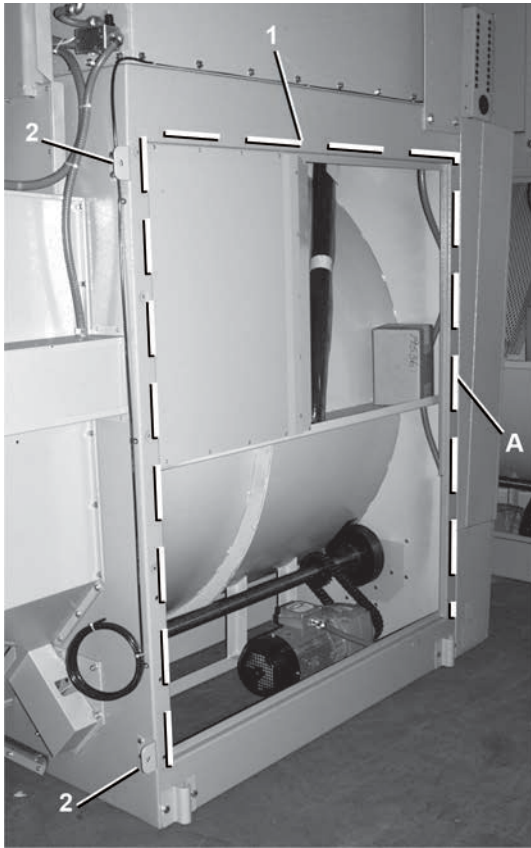

### Legend

- A** . . . Sealing foam is applied to the right side of the left machine of the pair only. The dashed line shows where to apply the foam. ("right machine" shown in photo)
- B** . . . Mounting brackets are used to join left and right machines on the rear of the house and to join the pedestal legs.
- C** . . . Covers for nameplate and emergency stop replacement.
- D** . . . Typical
- E** . . . Shim
- F** . . . Lifting brackets on the left and right machines are joined using shims and bolts.

## Dryer to Dryer Mounting Parts

2 Sheets

5050, 6450, 6458, 6464, 7676, 8282 Dryers

**Table 5. Parts List—Dryer to Dryer Mounting Parts**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Components				
all	1	60A008A	1" X 1" CLOSED CELL NEO SPONGE W/ADH.STRIP	
all	2	07 71309	6458 DRYER TO DRYER MNT BKT	
all	3	15K105	HXCAPSCR 3/8-16UNC2A1.25 GR5 P	
all	4	15U255	LOCKWASHER MEDIUM 3/8 ZINCPL	
all	5	15G205	HXNUT 3/8-16UNC2B ZINC GR2	
all	6	15K125	HEXCAPSCR 3/8-16UNC2AX2.5 GR5-	
all	7	07 71310	6458 DRYER TO DRYER MNT SHIM	
all	8	03 CC2X2	COVER PLT:DRYER NPLT REPLCMNT	
all	9	03 CC3X4	COVER PLT:DRYER E-STOP RPLCMNT	


BPDDUL01 / 2022256A

BPDDUL01.1 0000322253 C.2 B.2 6/17/22, 11:39 AM Released

**Pedestal Base Installation**

4 Sheet

5050, 6450, 6458, 6464, 7676, &amp; 8282 Dryers

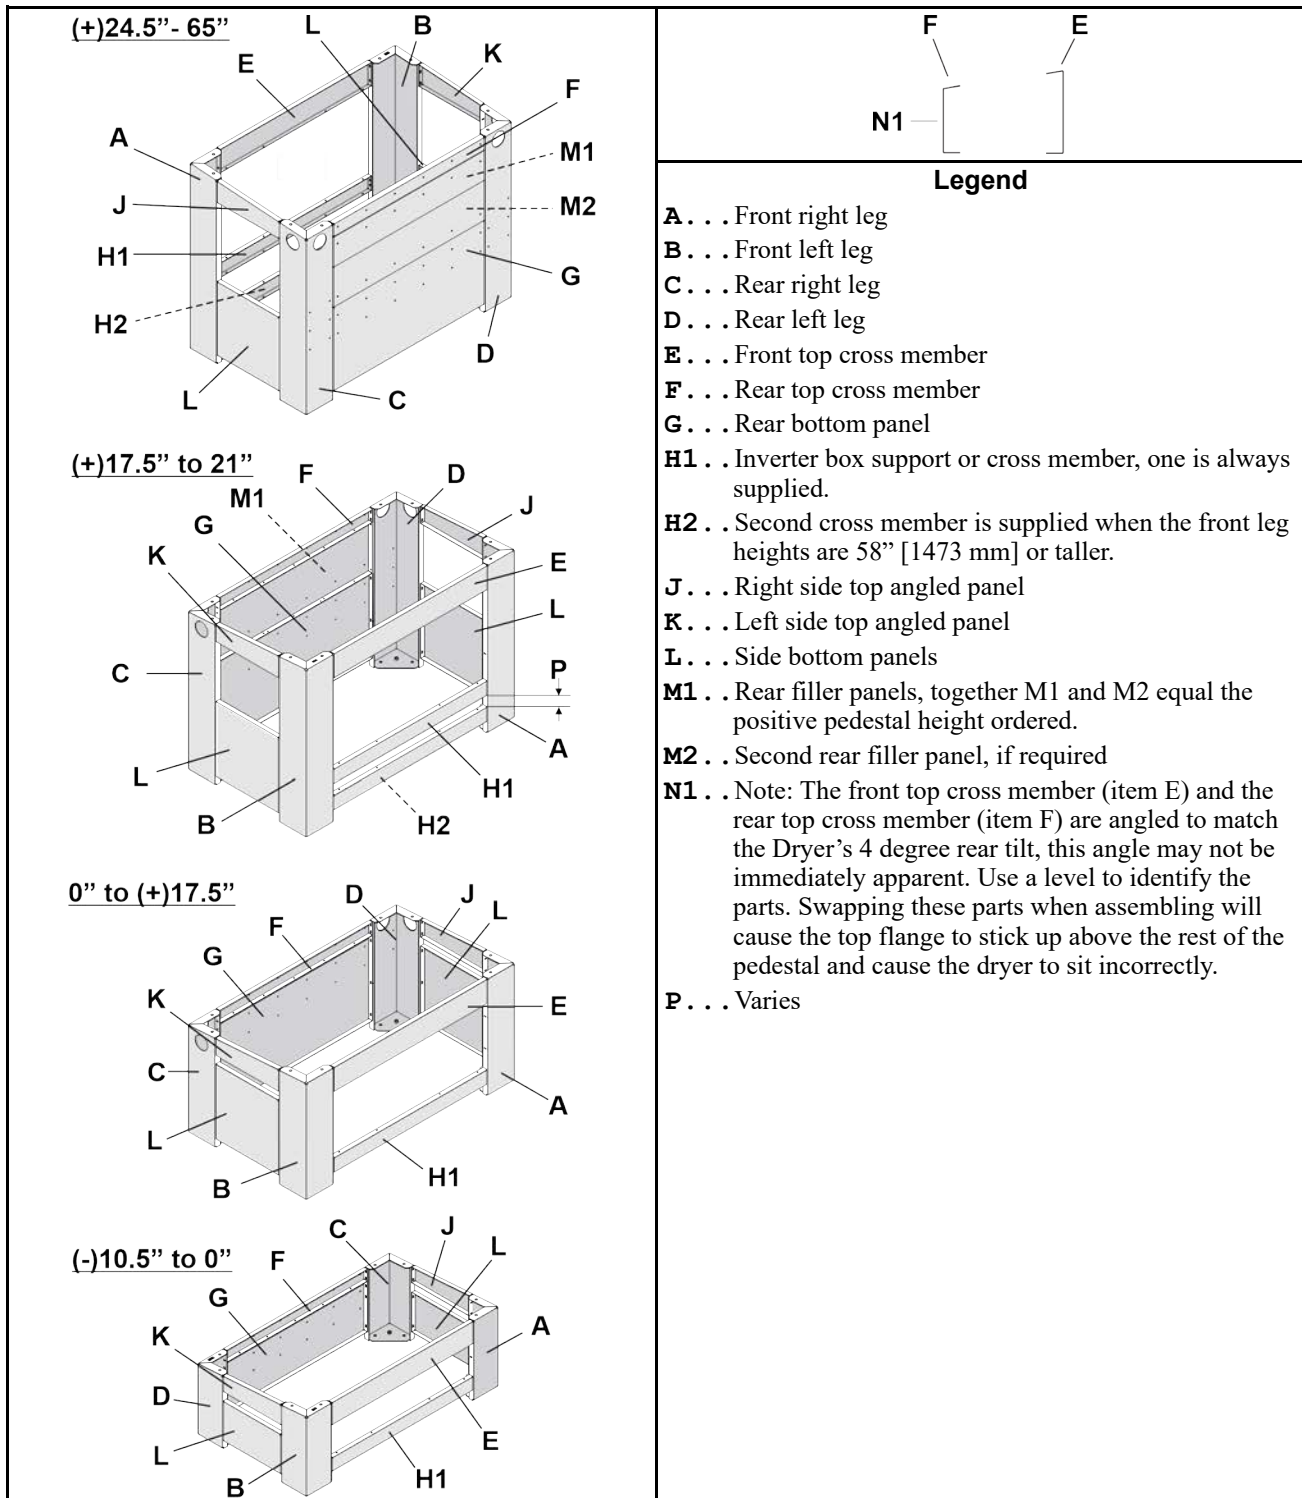**Figure 8. Placement of Components with Regard to Pedestal Height**




# Pedestal Base Installation

4 Sheet

5050, 6450, 6458, 6464, 7676, & 8282 Dryers


**Figure 9. Pedestal Options and Hardware Connections**

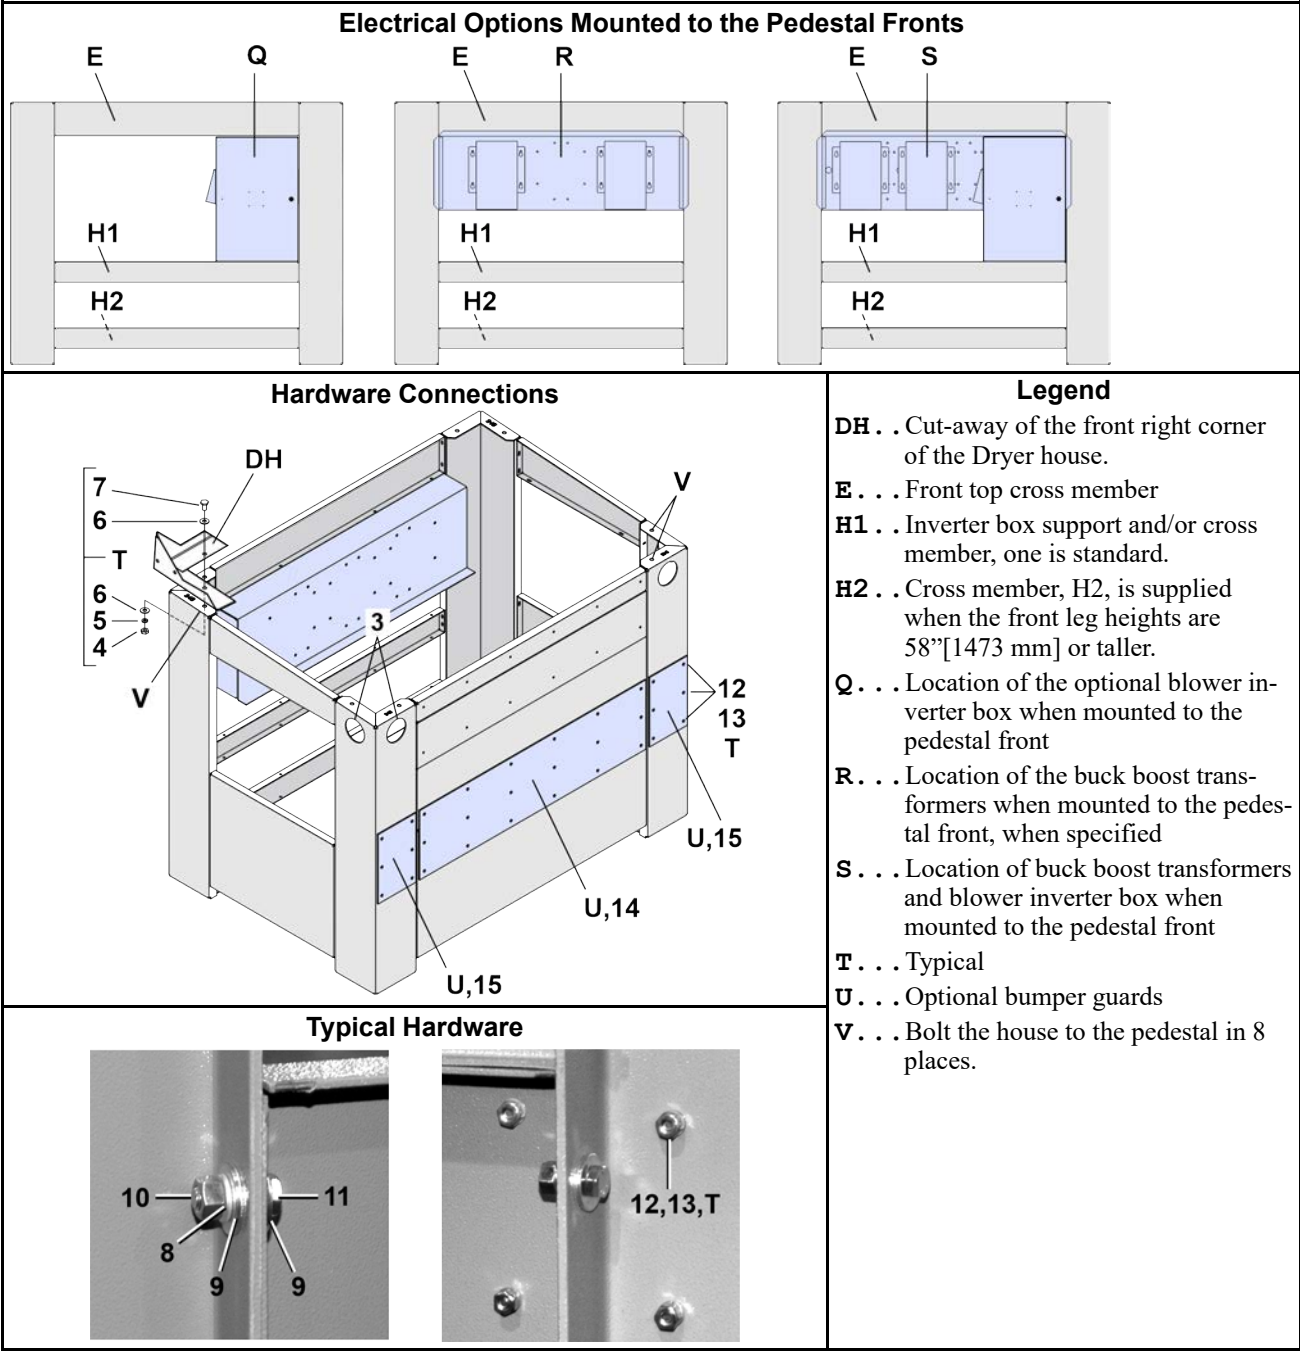

## Pedestal Base Installation

5050, 6450, 6458, 6464, 7676, & 8282 Dryers

**Figure 10. Anchoring**

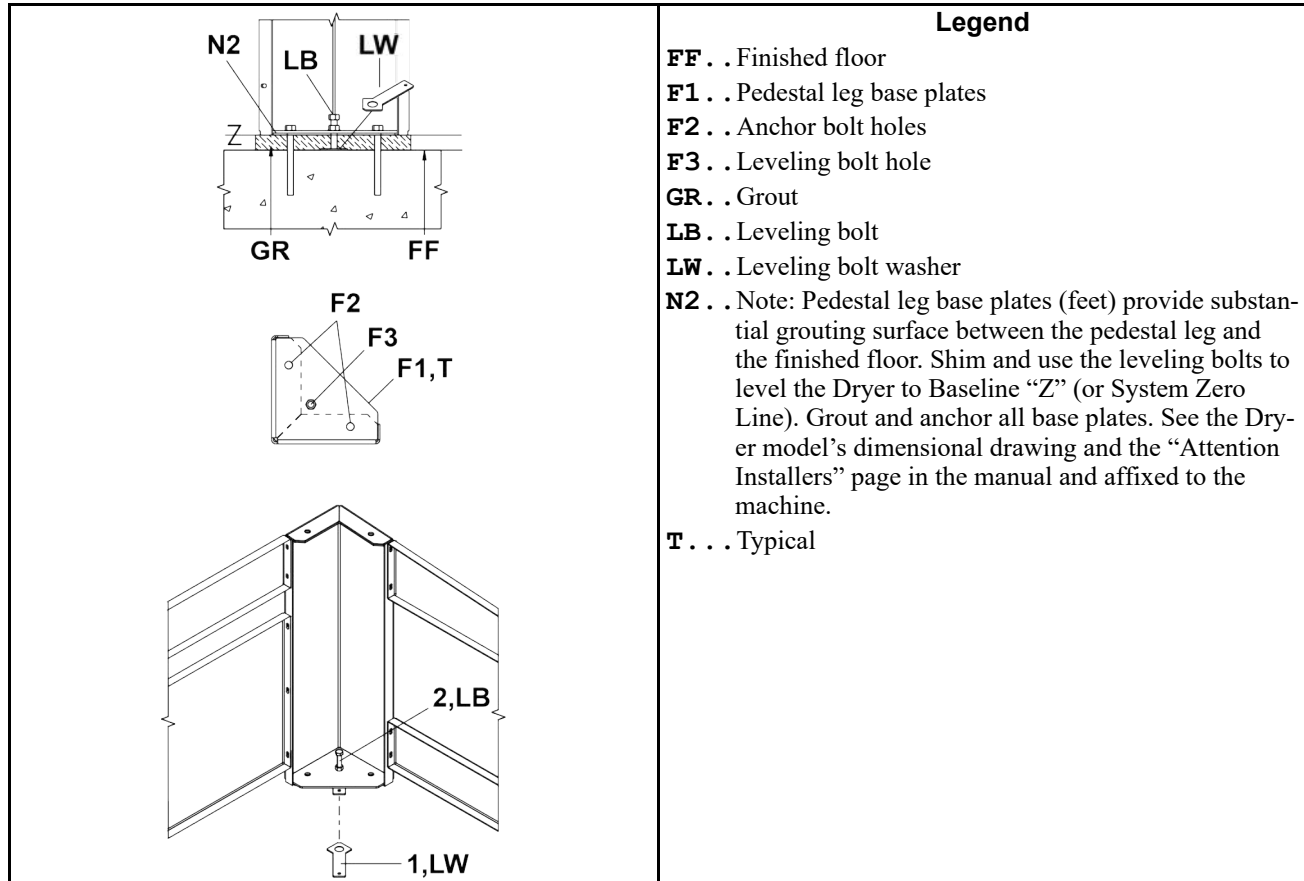

**Table 6. Parts List—Pedestal Base Installation**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Reference Assemblies				
	A	G77PD030	DRYER PEDESTAL STANDARD HARDWARE	
Components				
all	1	07 71579	DRYER JACKING BOLT WASHER	
all	2	15K226	HXTAPSCR 5/8-11UNC2AX3 GR5 ZIN	
all	3	12P14KSB	SNAPBUSH 5.0" X 4.75" X .75	
all	4	15G230	HXNUT 1/2-13UNC2B SAE ZINC GR2	
all	5	15U300	LOKWASHER REGULAR 1/2 ZINC PLT	
all	6	15U490	FLTWASH 1+1/2X17/32X1/4 ZINC	
all	7	15K191	HXCAPSCR 1/2-13UNC2AX2.5 GR5 Z	
all	8	15U255	LOCKWASHER MEDIUM 3/8 ZINCPL	



## Pedestal Base Installation

4 Sheet

5050, 6450, 6458, 6464, 7676, &amp; 8282 Dryers

**Table 6 Parts List—Pedestal Base Installation (cont'd.)**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
all	9	15U240	FLATWASHER(USS STD) 3/8" ZNC P	5050, 6450, 6458, 6464 Dryers 7676 Dryers
all	10	15G205	HXNUT 3/8-16UNC2B ZINC GR2	
all	11	15K095	HXCPSCR 3/8-16UNC2AX1 GR5 ZINC	
all	12	15N176	FLATMACSCR 1/4-20NCX3/4SS18-8	
all	13	15G164NE	HEXLOKNUT NYL 1/4-20 UNC2A SS.	
	14	07 71403	6458 BUMPER PAD-16"WX60"LG	
	14	07 81403	7272 BUMPER PAD	
all	15	07 71404	6458 BUMPER PAD-16"WX10"LG	

## 6 Sheets

**Cross Brace**

2  
1

RR F

**Legend**

- A . . . Location of the optional inverter box, if supplied.
- F . . . Front
- L . . . Left
- RR . . Rear
- V . . . Varies

**N1 . .** The upper front and upper rear cross braces are angled to match the angle of the pedestal legs. This angle may not be immediately apparent, you may need to use a level to identify the parts. Swapping these parts when assembling will cause the top flange to stick up above the rest of the pedestal and cause the dryer to sit incorrectly.

**N2 . .** Items 9 are used only in pedestals where the front leg heights are 58" [1473MM] or taller.

**N3 . .** Item 11 is only supplied with pedestals where the front leg heights are 46-1/4" [1174MM] or taller.

3, N1

1, N1

7

4

6

9

8 - L -

11, N3

9, N2

- F -


A

V

**Pedestal Base**

6 Sheets


6458TG1L/R ,TS1L/R 6464TG1L/R ,TS1L/R

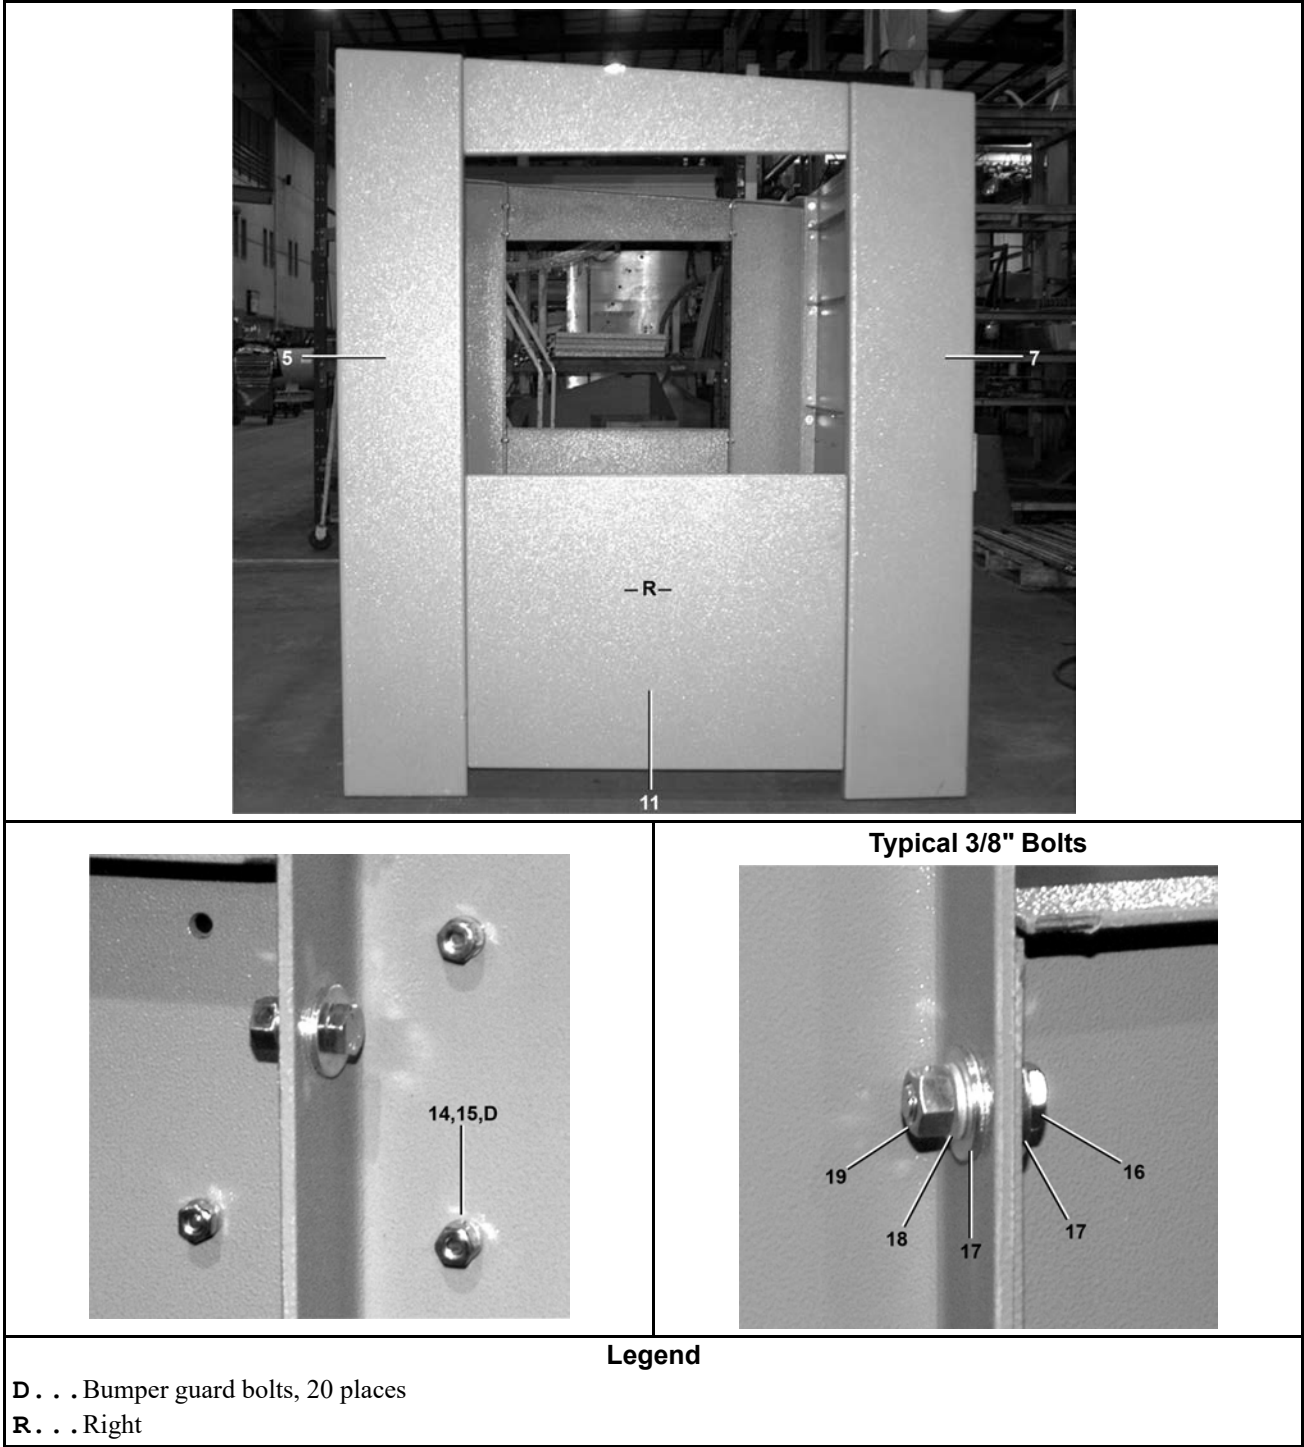

Pedestal Base

6458TG1L/R ,TS1L/R 6464TG1L/R ,TS1L/R

6 Sheets

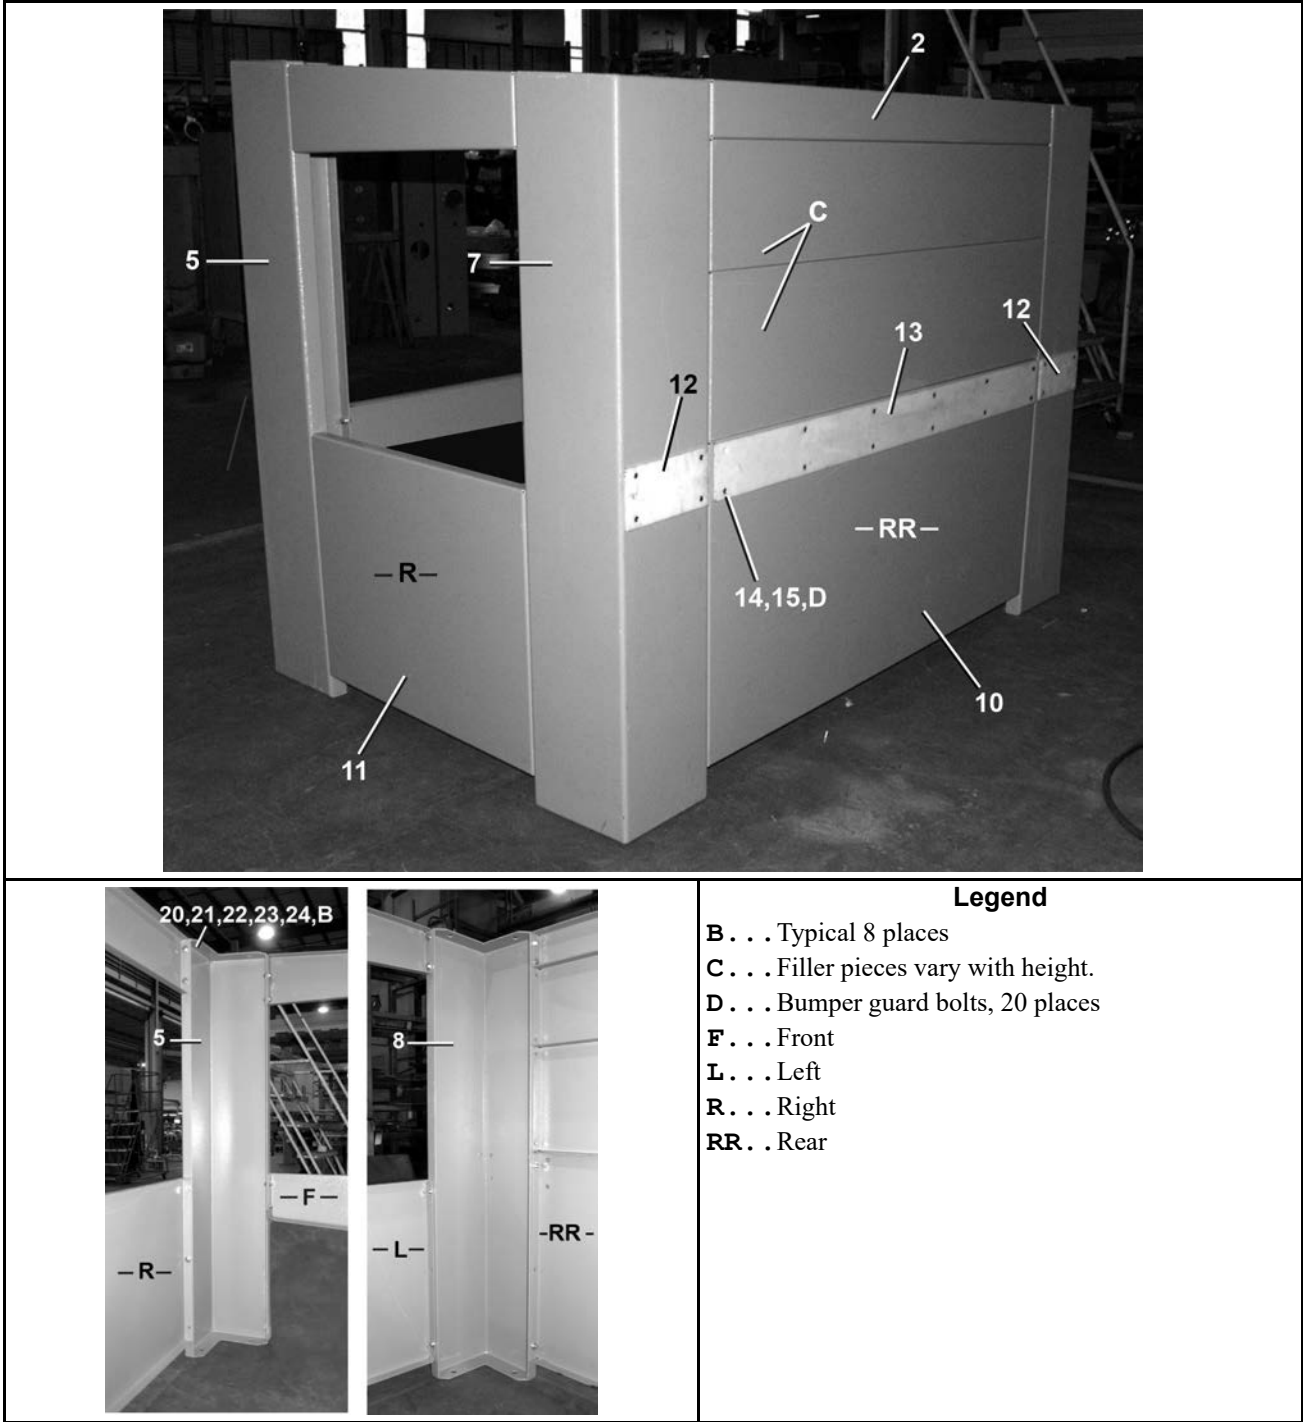

## Pedestal Base

6 Sheets

6458TG1L/R , TS1L/R 6464TG1L/R , TS1L/R

Table 7. Front Legs

Pedestal Order Height (inches)	Leg Length (inches)	Item 5 Part Number	Item 6 Part Number
0.0	40.968	07-71320	07-71320A
1.75	42.718	07-71322	07-71322A
3.5	44.468	07-71324	07-71324A
5.25	46.218	07-71326	07-71326A
7.0	47.968	07-71328	07-71328A
8.75	49.718	07-71330	07-71330A
10.5	51.468	07-71332	07-71332A
12.25	53.218	07-71334	07-71334A
14.0	54.968	07-71336	07-71336A
15.75	56.718	07-71338	07-71338A
17.5	58.468	07-71340	07-71340A
19.25	60.218	07-71342	07-71342A
21.0	61.968	07-71344	07-71344A
22.75	63.718	07-71346	07-71346A
24.5	65.468	07-71348	07-71348A
26.25	67.218	07-71350	07-71350A
28.0	68.968	07-71352	07-71352A
29.75	70.718	07-71354	07-71354A
33.25	74.218	07-71356	07-71356A
35.00	75.968	07-71358	07-71358A
36.75	77.718	07-71360	07-71360A
38.50	79.468	07-71362	07-71362A
31.50	72.468	07-71300	07-71300A
-3.5	34	07-71389B	07-71389C
-7	30.5	07-71389	07-71389A

## Pedestal Base

6 Sheets

6458TG1L/R, TS1L/R 6464TG1L/R, TS1L/R

Table 8. Rear Legs

Pedestal Order Height (inches)	Leg Length (inches)	Item 7 Part Number	Item 8 Part Number
0.0	37.8	07-71321	07-71321A
1.75	39.55	07-71323	07-71323A
3.5	41.3	07-71325	07-71325A
5.25	43.05	07-71327	07-71327A
7.0	44.8	07-71329	07-71329A
8.75	46.55	07-71331	07-71331A
10.5	48.3	07-71333	07-71333A
12.25	50.05	07-71335	07-71335A
14.0	51.8	07-71337	07-71337A
15.75	53.55	07-71339	07-71339A
17.5	55.3	07-71341	07-71341A
19.25	57.05	07-71343	07-71343A
21.0	58.8	07-71345	07-71345A
22.75	60.55	07-71347	07-71347A
24.5	62.3	07-71349	07-71349A
26.25	64.05	07-71351	07-71351A
28.0	65.8	07-71353	07-71353A
29.75	67.55	07-71355	07-71355A
33.25	71.05	07-71357	07-71357A
35.00	72.80	07-71359	07-71359A
36.75	74.55	07-71361	07-71361A
38.50	76.30	07-71363	07-71363A
31.50	69.300	07-71301	07-71301A
-3.5	30.8	07-71390B	07-71390C
-7	27.3	07-71390	07-71390A

## Pedestal Base

6 Sheets

6458TG1L/R ,TS1L/R 6464TG1L/R ,TS1L/R

**Table 9. Parts List—Pedestal Base**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Components				
all	1	07 71391	6458 DRYER BASE FILLER TOP FT	
all	2	07 71392	6458 DRYER BASE FILLER TOP RR	
all	3	07 71395	6458 DRYER BASE FILL DRV RITE	6458 DRYERS
all	3	07 72041	6464 DRYER BASE FILL DRV RIGHT	6464 DRYERS
all	4	07 71395A	6458 DRYER BASE FILL DRV LEFT	6458 DRYERS
all	4	07 72041A	6464 DRYER BASE FILL DRV LEFT	6464 DRYERS
all	5	07 71300	6458/64 = 31.5" PED FRONT RIGHT	
all	6	07 71300A	6458/64=31.5" PED FRONT LEFT	
all	7	07 71301	64" DRYER=31.5" PED REAR RIGHT	
all	8	07 71301A	64" DRYER=31.5" PED REAR LEFT	
all	9	07 71418	6458 DRYER FILLER INVERTER BOX	(2) USED FOR 17.5" PEDESTALS & HIGHER
all	10	07 71402	6458 DRYER BASE FILLER-REAR	
all	11	07 71396	6458 DRYER BASE FILL DRV LOW	6458 DRYERS
all	11	07 72042	6464 DRYER BASE FILL DRV LOW	6464 DRYERS
all	12	07 71404	6458 BUMPER PAD-16"WX10"LG	
all	13	07 71403	6458 BUMPER PAD-16"WX60"LG	
all	14	15G164NE	HEXLOKNUT NYL 1/4-20 UNC2A SS.	
all	15	15N176	FLATMACSCR 1/4-20NCX3/4SS18-8	
all	16	15K095	HXCPSCR 3/8-16UNC2AX1 GR5 ZINC	
all	17	15U240	FLATWASHER(USS STD) 3/8" ZNC P	
all	18	15U255	LOCKWASHER MEDIUM 3/8 ZINCPL	
all	19	15G205	HXNUT 3/8-16UNC2B ZINC GR2	
all	20	15K162	HXCAPSCR 1/2-13UNC2AX1.5 GR5 P	
all	21	15U490	FLTWASH 1+1/2X17/32X1/4 ZINC	
all	22	15U300	LOKWASHER REGULAR 1/2 ZINC PLT	
all	23	15G230	HXNUT 1/2-13UNC2B SAE ZINC GR2	
all	24	15U280	FL+WASHER(USS STD)1/2 ZNC PL+D	


BPDUUM06 / 2022253

BPDUUM06.1 0000486687 B.2 A.5 6/16/22, 9:31 AM Released

## Unload Bridge Installation

2 Sheets

5050, 6450, 6458, 6464, 7676, & 8282 Dryers

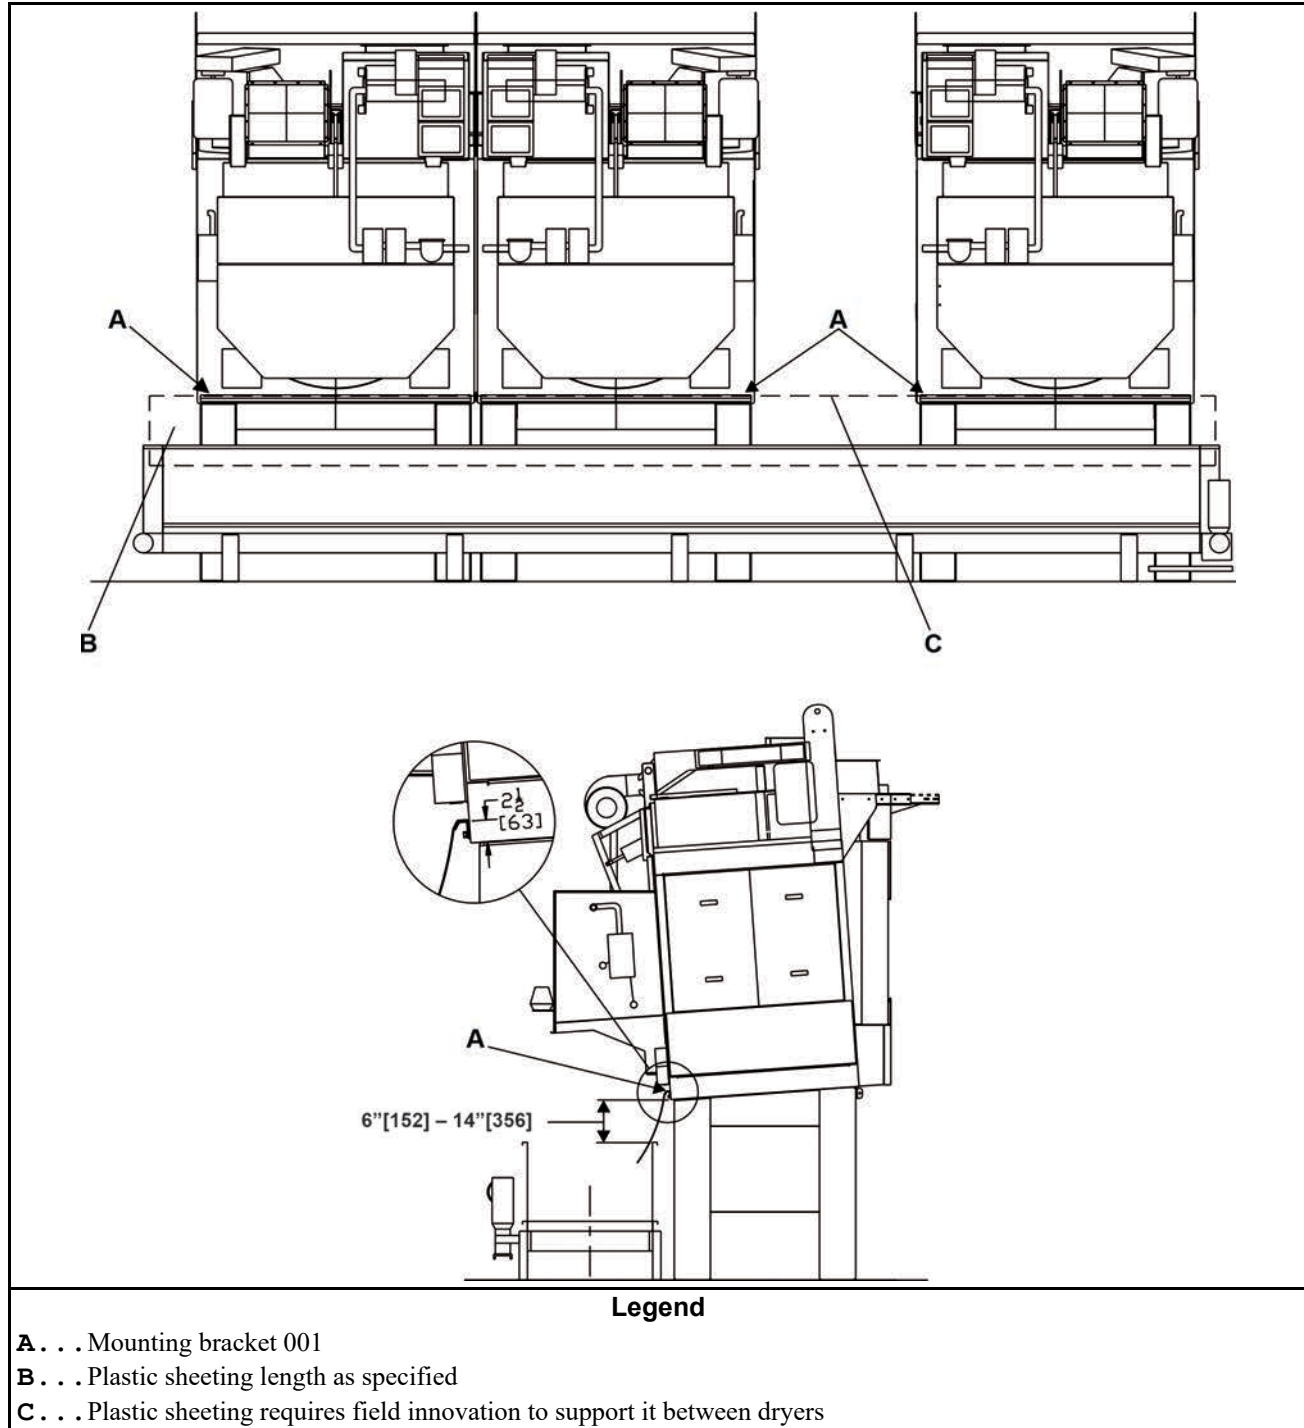



## Unload Bridge Installation

2 Sheets

5050, 6450, 6458, 6464, 7676, &amp; 8282 Dryers

**Table 10. Parts List—Unload Bridge Installation**

Find the assembly for your machine and the letter shown in the "Item" column. The components for your machine will show this letter or the word "all" in the "Used In" column. The numbers shown in the "Item" column are those shown in the illustrations.				
Used In	Item	Part Number	Description/Nomenclature	Comments
Reference Assemblies				
	B			5050 DRYERS
	C			6450, 6458 DRYERS
	D			6464 DRYERS
	F			7676 DRYERS
	G			8282 DRYERS
Components				
B	1	07 44230	5040 UNLOAD BRIDGE TO CONV	
CD	1	07 71568	6458 UNLOAD BRIDGE TO CONV	
F	1	07 71569	7272 UNLOAD BRIDGE TO CONV	
G	1	07 88094	8282 UNLOAD BRIDGE TO CONV	

## 2.2 Air and Duct Requirements for Milnor® Pass-through Dryers

BNDDUI01.C01 0000086779 A.10 A.11 B.2 Released



**NOTICE:** This document, along with the document BNDDUI01 “Utility Requirements for Gas, Steam, and Thermal Oil Dryers” gives air and duct requirements for Milnor® pass-through dryers. It also provides limited guidance for the layout of ducts. Pellerin Milnor Corporation accepts no responsibility for duct design or liability for damage or injury caused by ducts.

### 2.2.1 Air Requirements

BNDDUI01.C02 0000086790 A.10 B.2 Released



**CAUTION:** Insufficient air will cause dryers to malfunction and/or greatly reduce drying efficiency. Excessive back-pressure will cause dryers to malfunction.

#### 2.2.1.1 Air Flow

BNDDUI01.C03 0000086789 A.10 A.11 B.2 Released

All Milnor pass-through dryers move air, called main air, through the goods. The quantity of main air specified in document BNDDUI01 “Utility Requirements for Gas, Steam, and Thermal Oil Dryers” (in standard cubic feet per minute or scfm) must be available at the dryer main air inlet.

In addition, gas dryers use laundry room air for combustion. The quantity of combustion air specified in document BNDDUI01 “Utility Requirements for Gas, Steam, and Thermal Oil Dryers” (in standard cubic feet per minute or scfm) must be available at the dryer combustion air inlet.

#### 2.2.1.2 Back Pressure

BNDDUI01.C04 0000086788 A.10 B.2 Released

The total pressure drop imposed by all external components that the main air must pass through (examples: ducts, lint filters, rooftop ventilators) must be between 0 (zero) and 0.5 inch water column (125 Pascals).

For gas dryers, it is necessary to supply a sufficient quantity of air to the room where the dryers are located to replenish the combustion air taken in by the dryers and to prevent a low pressure condition in the room.



**NOTE:** The internal pressure drop between the dryer main air inlet and exhaust outlet fluctuates during operation and can greatly exceed the allowable external pressure drop.

### 2.2.2 Duct Requirements

BNDDUI01.C05 0000086787 A.10 B.2 Released

You can connect a duct between the dryer main air inlet and outside air. You must connect a duct between the dryer air exhaust outlet and the exterior of the building.

### 2.2.2.1 Is an Inlet Duct Necessary?

BNDDUI01.C06 0000086786 A.10 A.11 B.2 Released

Use an inlet duct to avoid negative air or if hazardous or corrosive fumes are present that could be drawn in to the dryers. Otherwise, consider the facility layout, operational procedures, and climatic conditions. It may be possible to take main air from the room in which the dryers are located, especially if this room is dedicated to the dryers and physically separated from other laundry activities. If conditions permit this arrangement, the facility can use barometric dampers to admit the quantity of outside air necessary to replenish the air taken in by the dryers. The air in the dryer room must be sufficient to meet the air requirements explained in [Section 2.2.1.1](#), page 44 at all times that the dryers operate.




**CAUTION: Negative air pressure** — will draw heat from a dryer into the room it is in. Nearby objects such as roof beams can become very hot.

- Provide an inlet duct when negative air would otherwise occur.

If main air cannot be supplied from inside the room the dryers are in, use inlet ducts to connect the dryers to outside air. For gas dryers, use powered ventilation in the facility to replenish the combustion air taken in by the dryers.

### 2.2.2.2 Duct Durability

BNDDUI01.C07 0000086785 A.12 A.10 B.2 Released



**CAUTION: Fluctuations in main air pressure** — will cause thin-gauge steel ducts to quickly fail from metal fatigue. Ducts with a rectangular cross-section can be damaged by these forces even when heavy gauge material is used. A rectangular duct on the exhaust side of the dryer is likely to fail.

- Consult a duct design professional before you use rectangular duct.

The ducts must be able to withstand the large flexing forces imposed on it by the internal air pressure changes that occur during dryer operation. At minimum, straight sections fabricated from galvanized sheet steel must have the following material thickness:

- Round duct - 20 gauge
- Rectangular duct - 16 gauge

It can be necessary to increase material thickness and use stiffeners for long duct lengths, large duct sizes, transitions, and elbows. Duct material must be able to withstand any corrosive forces imposed by the laundry environment. Galvanized sheet steel is usually sufficient, but special conditions can occur.

### 2.2.2.3 Duct Functionality

BNDDUI01.C08 0000086824 A.10 A.11 B.2 Released



**WARNING: Incorrect duct design** — can promote the buildup of flammable lint or cause flammable materials near a hot duct to ignite. It can also cause dryers to malfunction and greatly reduce productivity.

- ▶ Do not use any internal components in ducts (example: turning vanes).
- ▶ Obey codes that govern the clearances between hot ducts and flammable construction materials (example: roof sheathing).
- ▶ Do not connect ducts from different dryers together if you can avoid it. See [Section 2.2.2.3.1 : Multiple Dryers and Lint Collection, page 46](#).
- ▶ Do not use abrupt transitions or elbows with less than three segments. See [Section 2.2.2.3.2 : Transitions and Elbows, page 46](#)
- ▶ Provide inspection covers as necessary to keep all ducts clean.

#### 2.2.2.3.1 Multiple Dryers and Lint Collection

BNDDUI01.C09 0000086823 A.10 A.11 B.2 Released



**CAUTION: Common (shared) ducts** — can cause dryers to malfunction due to the fluctuation in pressure drop felt by each dryer as a result of the other dryers. This can occur even if the common duct is large enough to accommodate the combined output of all connected dryers.

- ▶ Consult a duct design professional if you must use a common duct.

If space limitations or other factors make the use of common ducts unavoidable, it will be necessary to provide a system to maintain back pressure within the range specified in [Section 2.2.1.2 : Back Pressure, page 44](#) automatically. A system of this type could include pressure-sensing devices, a variable-speed booster fan, and a controller.

Today, facility designers generally prefer internal lint screens (a Milnor® option) or close-coupled lint collection systems installed on each dryer. However, if the facility uses a common, powered lint collection system, you can connect the air exhaust from two or more dryers to this system if you run separate ducts from each dryer. The system must be designed to:

- accommodate the maximum combined flow from all dryers connected to it.
- maintain a constant back pressure in the range given in [Section 2.2.1.2 : Back Pressure, page 44](#).


#### 2.2.2.3.2 Transitions and Elbows

BNDDUI01.C10 0000086822 A.10 A.11 B.2 Released

Use smooth, gradual transitions. For calculations, consider any transition with a taper less than 7.5 degrees as straight duct. Consider a gradual transition that connects the main air inlet or exhaust outlet on the dryer to a larger size duct as the larger duct size.

See the figure below. For round duct, prefer elbows with radius R1. Do not use a smaller radius than Rs. Prefer elbows with six or more segments. Do not use elbows with less than three segments.

**Figure 11. Round duct elbow fabrication**

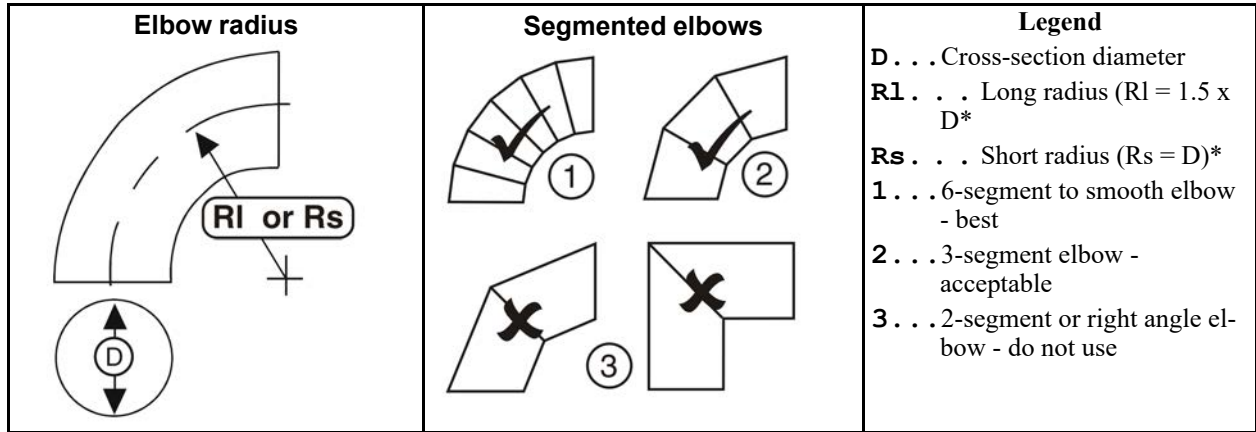


### 2.2.2.3.3 Vents

BNDDUI01.C11 0000086881 A.10 A.11 B.2 Released

Wind loads can contribute significantly to variations in the external pressure drop felt by dryers. Only the vent designs identified with a check mark in the figure below adequately counteract the effect of wind load.

Do not use a screen in the vent for the main air inlet.

**Figure 12. Vent Designs**

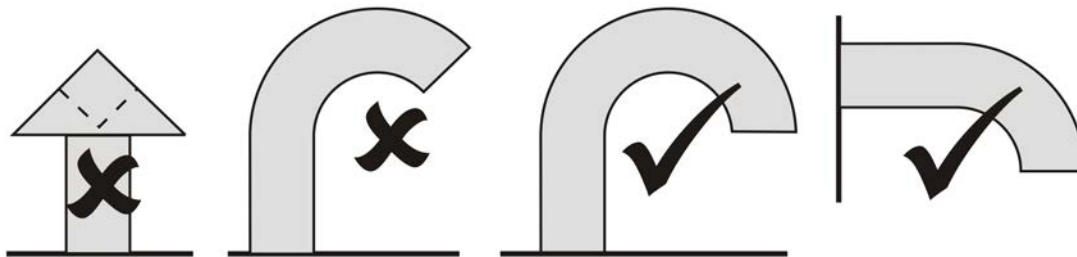

## 2.2.3 Duct Layout and Pressure Drop Calculations

BNDDUI01.R01 0000086879 A.10 B.2 Released

### 2.2.3.1 Units of Measure Used in the Calculations

BNDDUI01.R02 0000086878 A.10 B.2 Released

**Table 11. Units of Measure**

Type of Measurement	English Unit		Metric Unit	
	Abbreviated	Term	Abbreviated	Term
Short length	in	inches	(mm)	millimeters
Long length	ft	feet	(M)	meters
Air flow	scfm	standard cubic feet per minute	(nlpm)	normal liters per minute

**Table 11 Units of Measure (cont'd.)**

<b>Air velocity</b>	fpm	feet per minute	(npm)	meters per minute
<b>Pressure drop</b>	iwc	inches water column	(Pa)	Pascals

### 2.2.3.2 Duct Components and Their Pressure Drops

BNDDUI01.R03 0000086877 A.10 A.11 B.2 Released

The table that follows, gives selected round and rectangular duct sizes for each dryer model, in straight lengths and 90 degree elbows. If it is necessary to use components not given in the table (examples: other duct cross-sections, elbows with other than 90 degree angles), it will be necessary to refer to other texts or consult a duct design professional.

**Table 12. Duct Sizes and Pressure Drops for Dryer Models**

Air Specifications			Duct components, sizes, and pressure drops									
Dryer Model Prefix	Air flow - scfm (nlpm)	Velocity* for given cross-section - fpm (mpm)	Equivalent** cross-sections			Pressure drop - iwc (Pa)						
			Round	Rectangular***		Straight	90 Degree Elbows					
			Diame-ter-in (mm)	Height-in (mm)	Width-in (mm)	iwc per 100 feet (or Pa per 100 meters)	Smooth round		3-segment round		Rectangular	
							Rs Short radius	RI Long radius	Rs Short radius	RI Long radius	Radius -in (mm)	iwc (Pa)
50040 5040 5050 58040	3600 (101941)	2034 (620)	18 (457)	14 (356)	20 (508)	0.31 (253)	0.1 (25)	0.07 (17)	0.13 (32)	0.11 (27)	15 (381)	0.09 (22)
				15 (381)	19 (483)						14.25 (362)	
				16 (406)	17 (432)						12.75 (324)	
				17 (432)	16 (406)						12 (305)	
				19 (483)	15 (381)						11.25 (286)	
				20 (508)	14 (356)						10.5 (267)	
58058	5200 (147248)	2384 (727)	20 (508)	16 (406)	22 (559)	0.37 (302)	0.13 (32)	0.09 (22)	0.17 (42)	0.14 (35)	16.5 (419)	0.12 (30)
				17 (432)	20 (508)						15 (381)	
				18 (457)	19 (483)						14.25 (362)	
				19 (483)	18 (457)						13.5 (343)	
				20 (508)	17 (432)						12.75 (324)	
				22 (559)	16 (406)						12 (305)	
58080	Contact factory											
6450	6000 (169901)	2400 (732)	22 (559)	20 (508)	19 (483)	0.30 (245)	0.09 (22)	0.06 (15)	0.18 (45)	0.14 (35)	14.25 (362)	0.12 (30)
6458 6464	8500 (240693)	2400 (732)	26 (660)	24 (610)	23 (584)	0.30 (245)	0.09 (22)	0.06 (15)	0.18 (45)	0.14 (35)	23 (584)	0.08 (20)

**Table 12 Duct Sizes and Pressure Drops for Dryer Models (cont'd.)**

Air Specifications			Duct components, sizes, and pressure drops									
Dryer Model Prefix	Air flow - scfm (nlpm)	Velocity* for given cross-section - fpm (mpm)	Equivalent** cross-sections			Pressure drop - iwc (Pa)						
			Round	Rectangular***		Straight	90 Degree Elbows					
			Diame-ter-in (mm)	Height-in (mm)	Width-in (mm)	iwc per 100 feet (or Pa per 100 meters)	Smooth round		3-segment round		Rectangular	
							Rs Short radius	RI Long radius	Rs Short radius	RI Long radius	Radius -in (mm)	iwc (Pa)
72072 (with tower)	10000 (283168)	2100 (640)	30 (762)	23 (584)	33 (838)	0.15 (123)	0.21 (52)	0.17 (42)	0.28 (70)	0.24 (60)	31 (787)	0.14 (35)
				24 (610)	31 (787)						30 (762)	
				25 (635)	30 (762)						28.75 (730)	
				26 (660)	28 (711)						28 (711)	
				27 (686)	27 (686)						27.25 (692)	
				28 (711)	26 (660)						26.75 (679)	
				30 (762)	25 (635)						24.5 (622)	
				31 (787)	24 (610)						23.75 (603)	
				33 (838)	23 (584)						22.75 (578)	
7272 7676 8282	14000 (396436)	2600 (792)	32 (813)	27 (686)	29 (737)	0.28 (229)	0.11 (27)	0.08 (20)	0.21 (52)	0.13 (32)	27 (686)	0.13 (32)
* A velocity of at least 2000 fpm (610 mpm) helps keep lint particles in suspension. ** Equivalent means that the rectangular cross sections have the same pressure drop as the round cross-section. *** Field data determines the number of rectangular cross-sections shown for each dryer model.												


### 2.2.3.3 Example Layout

BNDDUI01.C12 0000087235 A.10 A.11 B.2 Released

To provide a more comprehensive example, the figure below shows both rectangular and round duct. However, avoid using rectangular duct if possible, especially for the exhaust duct.

The figure below shows the pressure drop values taken from [Section 2.2.3.2 : Duct Components and Their Pressure Drops, page 48](#) and used in the example equations in [Section 2.2.3.4 : Pressure Drop Equations and Examples, page 51](#) superimposed on each piece of duct.

**Figure 13. Example Duct Layout for Model 6464TG1L Dryer**

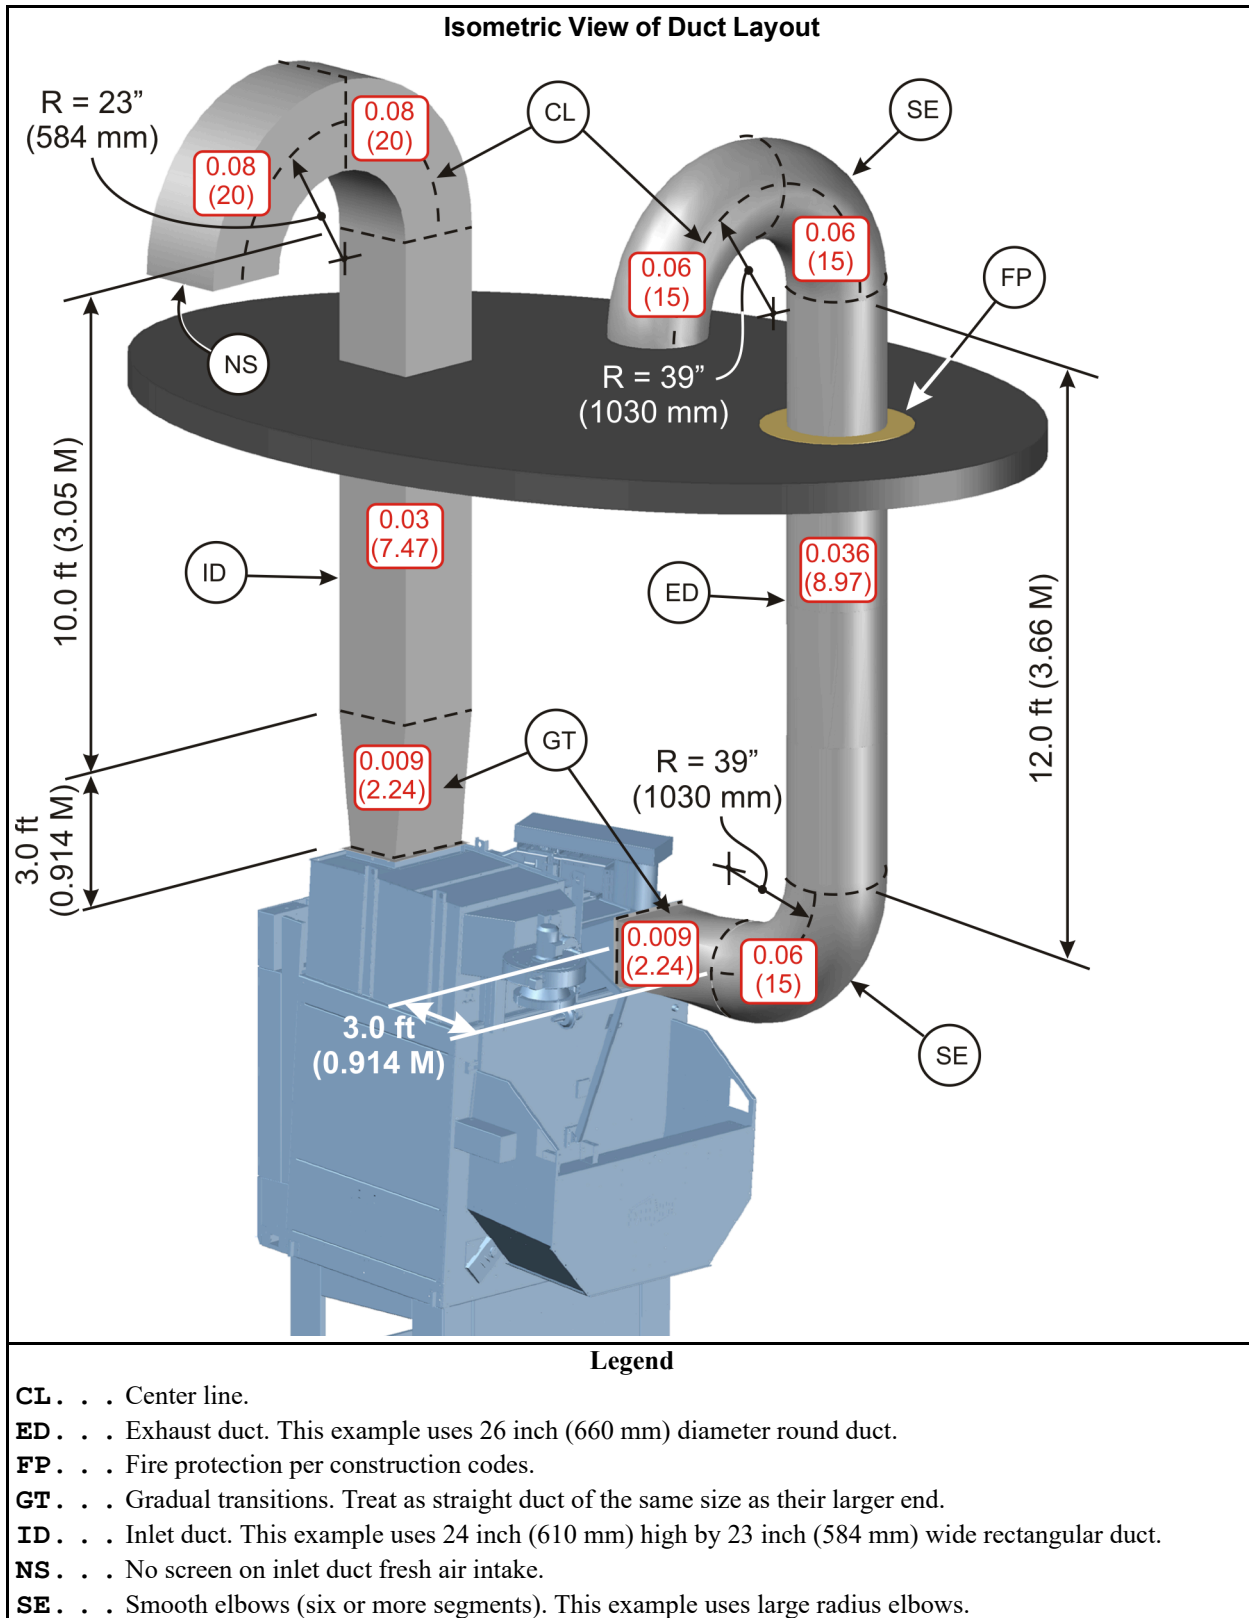



### 2.2.3.4 Pressure Drop Equations and Examples

BNDDUI01.C14 0000087352 A.10 A.11 B.2 Released

Calculate the pressure drop for each straight length of duct as follows:

$$PD_s = PD_{100} \times L / 100$$

Where:

$PD_s$  = Pressure drop for a straight length

$PD_{100}$  = Pressure drop per 100 feet (or 100 meters) as given in table

$L$  = Length of straight section in feet (or meters)

The following examples calculate the pressure drop for the 10 ft (3.05 M) length of rectangular duct in Figure 3.

English example:

$$0.3 \times 10 / 100 = 0.03 \text{ iwc}$$

Metric example:

$$243 \times 3.05 / 100 = 7.47 \text{ Pa}$$

Calculate the total pressure drop as follows:

$$PD_T = PD_1 + PD_2 + PD_3 + \dots + PD_n + PD_F$$

Where:

$PD_T$  = Total external pressure drop

$PD_1$  = Pressure drop for the most upstream (inlet-end) component

$PD_2, PD_3, \dots$  = Pressure drop for each next duct component in sequence

$PD_n$  = Pressure drop for the most downstream (exhaust-end) component

$PD_F$  = Pressure drop contributed by the external lint collection system, if any.

The following examples calculate the total pressure drop for the layout shown in [Figure 13, page 50](#) after the pressure drops for all straight sections have been calculated. The dryer in the example layout uses internal lint screens. The installation does not have a separate, external lint collection system.

English example:

$$0.08 + 0.08 + 0.03 + 0.009 + 0.009 + 0.06 + 0.036 + 0.06 + 0.06 = 0.424 \text{ iwc}$$

Metric example:

$$20 + 20 + 7.47 + 2.24 + 2.24 + 15 + 8.97 + 15 + 15 = 105.92 \text{ Pa}$$

BNDDUI01 / 2019285

BNDDUI01 0000243162 B.2 8/11/25, 2:58 PM Released

## 2.3 Utility Requirements For Gas, Steam and Thermal Oil Dryers

BNDDUI01.C01 0000243161 B.2 A.4 B.5 1/2/20, 1:40 PM Released

This document applies to all Milnor® pass-through dryer models. It specifies heating fuel and air intake requirements and gives general information on all utility connections. Additional information about utility connections is located in the following documents:

**dimensional drawing for your machine** gives pipe sizes, connection types, and connection locations

**laundry layout drawings for your system** gives the control connections, which are system-dependent

**document BNDGUI01 “Air and Ductwork Requirements for Milnor® Pass-through Dryers”** gives design criteria for customer-supplied inlet and outlet ductwork

**external fuse and wire document for your machine** gives customer-supplied fuse, circuit breaker, and wire sizes for the available machine voltages

**machine nameplate** gives the voltage for your machine

The connections which may be required depending on machine model and options are:

1. Piped inlets and outlets: heating fuel (natural gas, propane, steam, or thermal oil), sprinkler (cold) water, compressed air, gas line vent, gas test tap, steam condensate return, vacuum breaker drain.
2. Ducted inlets and outlets: main air intake, main air exhaust
3. Electric power connections and removal of related shipping restraint
4. Control connections
5. Bumper guard attachment

## 2.3.1 Plumbing and Other Mechanical Connections

BNDUI01.C02 0000243238 A.3 B.2 B.5 1/2/20, 1:40 PM Released

### 2.3.1.1 Hazards and Precautions


BNDUI01.C03 0000243237 A.3 B.2 B.5 1/2/20, 1:40 PM Released

#### 2.3.1.1.1 All Models

BNDUI01.C04 0000243236 A.3 B.2 B.5 1/2/20, 1:40 PM Released



**WARNING: Fire Hazards** — Sprinkler and overheat control—Failure to supply water to the sprinkler or to open the manual valve, or failure of the overheat control, eliminates the machine's internal fire protection. Normally the machine stops and water is sprayed into the cylinder if outlet temperature reaches 240 degrees Fahrenheit (116 degrees Celsius).



**CAUTION: Machine Damage Hazards** — Valve bodies have fragile components.

- ▶ Do not distort valve bodies. Hold tension against these valves with a wrench on the side of the valve onto which the pipe is being connected to prevent twist distorting the valve.
- ▶ Always install unions and shut off valves at the water and steam connection points to permit removal of the machine components for servicing.

### 2.3.1.1.2 Gas and Propane Models

BNDUII01.C05 0000243235 A.3 B.2 B.5 1/2/20, 1:40 PM Released



**WARNING: Explosion and Fire Hazards** — Improperly installed gas-fired devices can release gas.

- ▶ Conform with local codes or, in their absence, with the **National Fuel Gas Code, ANSI Z223.1/NFPA 54** or the **Natural Gas and Propane Installation Code, CSA B149.1** or a superseding directive.
- ▶ Electrically ground the machine in accordance with local codes or, in their absence, with the **National Electric Code, ANSI/NFPA 70** or the **Canadian Electrical Code, CSA C22.1** or a superseding directive.
- ▶ Install a minimum 1/2 inch NPT plugged tap, accessible for test gauge connection, immediately upstream of the gas supply connections to the dryer.
- ▶ Install vent lines on any regulator vents and vent this gas to the outdoors.



**WARNING: Explosion, Fire, and Machine Damage Hazards** — Excessive gas pressure can damage gas train components, possibly resulting in the release of gas.

- ▶ Make sure that the pressure of gas entering the dryer is regulated to the maximum specified in this document.
- ▶ Isolate the dryer from the gas supply for any pressure testing of the incoming gas supply line.

### 2.3.1.1.3 Steam and Thermal Oil Models

BNDUII01.C06 0000243234 A.3 B.2 B.5 1/2/20, 1:40 PM Released




**CAUTION: Machine Malfunction Hazard** — Steam traps rated at 85 to 180 psi (586 to 1241 kPa) will not operate properly below 60 psi (414 kPa). Steam traps rated at 160 to 225 psi (1103 to 1551 kPa) will not operate properly below 115 psi (793 kPa).

- ▶ Conform to the rated pressure of the steam coil as stated on the machine nameplate.
- ▶ Choose a steam trap with a pressure rating corresponding to the actual pressure supplied.



**CAUTION: Machine Damage Hazards** — Allow steam coil to preheat and purge condensate before operating dryer or conditioner.

- ▶ Verify that the facility boiler has operated at least 15 minutes before the dryer receives the first load each day.



**CAUTION: Machine Damage Hazards** — Steam coil antifreeze is drained at the factory but some residue may remain.

- ▶ Route the steam condensate return line to the sewer for the first hour of operation to prevent residual antifreeze from entering the boiler system.

### 2.3.1.2 Heating Fuel and Air Intake Requirements

BNDUII01.C07 0000243233 B.2 A.4 B.5 1/2/20, 1:40 PM Released

These requirements are given in the following two tables. The first table covers models in production on or after January 1, 2016. The second table covers models that were no longer in production as of January 1, 2016.

The nameplate designations for certain newer dryer models (the first table) changed from a 5-digit numeric prefix to a 4-digit numeric prefix, but the specifications remain the same. If you have one of these models, your nameplate may show 5050\_ or 50050\_, 6450\_ or 64050\_, 6458\_ or 64058\_, 6464\_ or 64064\_.

Newer gas dryer models (the first table) include the 5050\_ (or 50050\_) models which are only available with the air heat burner design, the 6450\_ (or 64050\_), 7676\_, and 8282\_ models, which are only available with the ratio air burner design, and the 6458\_ (or 64058\_) and 6464\_ (or 64064\_) models, which are available with either burner design. Older dryer models (the second table) were only available with air heat or older burner design.

**Table 13. Gas, Steam, and Air Intake - Newer Dryer Models**

Model number prefix	5050_ 50050_	6450_ 64050_	6458_ 64058_	6464_ 64064_	7676_	8282_
Capacity basis - lb (kg)	150 (68)	220 (100)	250 (113)	300 (136)	500 (227)	630 (2860)
<b>Gas inlet with air heat burner (natural gas and propane models)</b>						
Maximum Btu/hr (kcal/hr) at x" (mm) water column	950,000 (240,000) @ 13.5" (343)	1,500,000 (378,246) @ 13.5" (343)	1,800,000 (453,000) @ 13.5" (343)	1,800,000 (453,000) @ 13.5" (343)	n.a.	n.a.
Average Btu/hr (kcal/hr) at x" (mm) water column	495,000 (124,738) @ 13.5" (343)	725,000 (182,819) @ 13.5" (343)	825,000 (207,900) @ 13.5" (343)	990,000 (249,480) @ 13.5" (343)	n.a.	n.a.
<b>Gas inlet with ratio air burner (natural gas and propane models)</b>						
Maximum Btu/hr (kcal/hr) at x" (mm) water column	n.a.	1,300,000 (327,800) @ 25" (635)	1,800,000 (453,000) @ 25" (635)	1,800,000 (453,000) @ 25" (635)	3,000,000 (756,000) @ 40" (1016)	pending
Average Btu/hr (kcal/hr) at x" (mm) water column	n.a.	726,000 (182,952) @ 25" (635)	825,000 (207,900) @ 25" (635)	990,000 (249,480) @ 25" (635)	1,650,000 (415,793) @ 40" (1016)	2,079,000 (523,899) @ 40" (1016)
<b>Steam inlet (steam models)</b>						
Maximum Lb/Hr (kg/hr)	820 (372)	pending	1,990 (903)	1,990 (903)	3,223 (1462)	pending

**Table 13 Gas, Steam, and Air Intake - Newer Dryer Models (cont'd.)**

Model number prefix	5050_ 50050_	6450_ 64050_	6458_ 64058_	6464_ 64064_	7676_	8282_
Average Lb/Hr (kg/hr)	382 (173)	561 (254)	638 (289)	765 (347)	1,275 (578)	1,606 (728)
Maximum boiler horse-power (kw)	23.8 (10.8)	pending	57.7 (26.2)	57.7 (26.2)	93.4 (42.4)	pending
Average boiler horse-power (kw)	11.1 (8.3)	16.3 (12.1)	18.5 (13.8)	22.2 (16.5)	37.0 (27.6)	46.6 (34.7)
Thermal oil inlet (thermal oil models) - Consult Milnor® factory						
Main air intake						
Maximum scfm (cu m/ min)	3,600 (102)	6,000 (170)	8,500 (241)	8,500 (241)	14,000 (396)	14,000 (396)
Maximum allowable back pressure	0.5" water column					
Combustion (non-ducted, ambient) air intake with air heat burner (natural gas and propane models)						
Maximum scfm (cu m/ min) to blower	250 (7)	715 (20)	715 (20)	715 (20)	n.a.	n.a.
Maximum scfm (cu m/ min) to fire box	400 (11)	500 (14)	500 (14)	500 (14)	n.a.	n.a.
Total	650 (18)	1,215 (34)	1215 (34)	1215 (34)	n.a.	n.a.
Combustion (non-ducted, ambient) air intake with ratio air burner (natural gas and propane models)						
Maximum scfm (cu m/ min) to blower	n.a.	400 (11)	400 (11)	400 (11)	600 (17)	pending

**Table 14. Gas, Steam, and Air Intake - Older Dryer Models**

Model number prefix	5040_ 50040_	58040_	58058_	58080_	72072_ with tower	72072_ no tower
Capacity basis - lb (kg)	110 (50)	150 (68)	220 (100)	300 (136)	425 (193)	425 (193)
<b>Gas inlet (natural gas and propane models)</b>						
Maximum Btu/hr (kcal/hr) at x" (mm) water column	950,000 (240,000) @ 13.5" (343)	950,000 (240,000) @ 13.5" (343)	1,400,000 (350,000) @ 13.5" (343)	1,800,000 (453,000) @ 13.5" (343)	2,700,000 (680,000) @ 18" (457)	2,700,000 (680,000) @ 18" (457)
Average Btu/hr (kcal/hr) at x" (mm) water column	363,000 (91,476) @ 13.5" (343)	495,000 (124,738) @ 13.5" (343)	726,000 (182,952) @ 13.5" (343)	990,000 (249,480) @ 13.5" (343)	1,402,500 (353,430) @ 18" (457)	1,402,500 (353,430) @ 18" (457)
<b>Steam inlet (steam models)</b>						
Maximum lb/hr (kg/hr)	600 (272)	600 (272)	950 (431)	1300 (590)	n.a.	n.a.
Average lb/hr (kg/hr)	127 (280)	173 (382)	561 (254)	765 (347)	n.a.	n.a.
Maximum boiler horse-power (kw)	17.4 (7.9)	17.4 (7.9)	27.5 (12.5)	37.7 (17.1)	n.a.	n.a.
Average boiler horse-power (kw)	8.1 (3.7)	11.1 (5.0)	16.3 (7.4)	22.2 (10.1)	n.a.	n.a.

**Table 14 Gas, Steam, and Air Intake - Older Dryer Models (cont'd.)**

Model number prefix	5040_ 50040_	58040_	58058_	58080_	72072_ with tower	72072_ no tower
Thermal oil inlet (thermal oil models) - Consult Milnor® factory						
Main air intake						
Maximum scfm (cu m/ min)	3,600 (102)	3,600 (102)	5,000 (142)	6,800 (193)	10,000 (283)	14,000 (396)
Maximum allowable back pressure	0.5" (water column)					
Combustion (non-ducted, ambient) air intake (natural gas and propane models)						
Maximum scfm (cu m/ min) to blower	250 (7)	250 (7)	400 (11)	500 (14)	715 (20)	715 (20)
Maximum scfm (cu m/ min) to fire box	400 (11)	n.a.	n.a.	n.a.	900 (25)	900 (25)

### 2.3.1.3 Other Mechanical Requirements

BNDUII01.C08 0000243305 B.2 A.4 B.5 1/2/20, 1:40 PM Released

**Main air intake and exhaust ducting** Per document BNDGUI01 “Air and Ductwork Requirements for Milnor® Pass-through Dryers.”

**Sprinkler water inlet** Minimum 35 PSI (2.4 ATU). Must reliably provide 60 USg (227 liters) per minute for fire safety.

**Compressed air inlet** Clean and dry 85 PSI (5.8 ATU) to 110 PSI (7.5 ATU)

**Compressed air inlet for optional internal lint filter** 85 PSI (5.8 ATU) to 110 PSI (7.5 ATU). Air usage estimate: 110 scf (3.1 cubic meter) in 15 seconds when activated.

**Customer-supplied connector between the gas inlet and the gas supply piping** a listed connector in compliance with ANSI Z21.24 CSA 6.10 “Standard for Connectors for Gas Appliances”

**Customer-supplied tap (gas/propane models)** 1/2" NPT plugged tap, accessible for test gauge connection. Install immediately upstream of the gas supply connections to the dryer.

**Gas line vent (gas/propane models)** 1/4" stainless steel. Must be vented from the regulator vent to the exterior of the building.

**Steam condensate outlet (steam models)** Per plumbing code. Return condensate to boiler through a steam trap of the correct size. Two steam traps are available from Milnor®: One for 85 - 180 PSI (6 - 12 ATU) and one for 160 - 225 PSI (11 - 15 ATU).

**Vacuum breaker (steam models)** Vent the tube to the sewer.

## 2.3.2 Electrical Connections

BNDUII01.C09 0000243304 A.3 B.2 B.5 1/2/20, 1:40 PM Released

### 2.3.2.1 Hazards and Precautions

BNDUII01.C10 0000243303 B.2 A.4 B.5 1/2/20, 1:40 PM Released




**WARNING: Severe injury and machine damage hazards** — Electric power can shock or electrocute you. Incorrect electrical connections can damage machine components.

- ▶ Do not attempt electric power connections unless qualified and authorized.
- ▶ Prior to making power connections, read the instructions on all related tags.
- ▶ Connect the “stinger leg” if any, only to terminal L3, never to terminals L1 or L2.
- ▶ Verify all motor rotation. If the cylinder turns in the wrong direction, interchange the wires connected to L1 and L2. Never move L3.



**CAUTION: Machine Damage Hazards** — The blower motor or other drive components can be destroyed if the blower bearing shipping restraint is incorrectly handled.

- ▶ Perform the steps given in [Section 2.3.2.2 : Remove Blower Shipping Bracket and Reconnect Motor Contactor Coil](#), page 57.



**CAUTION: Risk of malfunction and damage** — Wiring errors can cause damage and incorrect operation.

- ▶ Label all wires if you must disconnect them to service the control.


### 2.3.2.2 Remove Blower Shipping Bracket and Reconnect Motor Contactor Coil

BNDUUI01.C11 0000243300 A.3 B.2 B.5 1/2/20, 1:40 PM Released

The machine was shipped with a blower shipping restraint ([Figure 14: Blower Shipping Restraint](#), page 57 ). This bracket immobilizes the blower bearing, preventing bearing damage during shipping. Connections to one side of the blower motor contactor coil ([Figure 15: Reconnect Blower Contactor Coil Wires](#), page 58 ), are removed after testing, to prevent blower operation with bracket in place. When the machine is in its final position, remove the restraint and reconnect the contactor coil as follows:

1. Unbolt and remove red restraint.
2. Install the belt guard.
3. Locate the blower contactor inside the high voltage electric box.
4. Match the tagged coil wire with the tagged contactor coil terminal and reconnect.

**Figure 14. Blower Shipping Restraint**

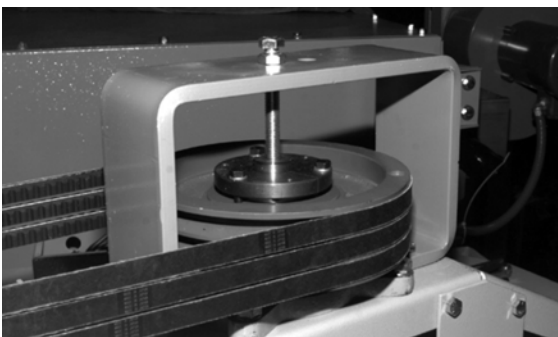

**Figure 15. Reconnect Blower Contactor Coil Wires**



### 2.3.2.3 Electric Power Connection Capacities

BNDUII01.C12 0000243297 A.3 B.2 B.5 1/2/20, 1:40 PM Released

The customer must furnish a remotely mounted disconnect switch with lag type fuses or circuit breakers, and wiring between this box and the fuse box on the machine. Refer to the machine nameplate and the external fuse and wire document for your machine to determine the sizes of these fuses or circuit breakers, and wires.

### 2.3.2.4 Control Connections

BNDUII01.C13 0000243296 A.3 B.2 B.5 1/2/20, 1:40 PM Released

Refer to the layout drawings for your laundering system.


### 2.3.3 Bumper Guard Installation

BNDUII01.C15 0000841722 A.3 B.2 B.5 8/11/25, 2:47 PM Released

The machine is supplied with bumper guards which must be installed on the rear of the machine when the machine is on site. The guards protect the machine from the constant impact of laundry carts placed under the discharge door. Hence the height at which the guards are installed must match the height of the carts used. See [Figure 16, page 59](#).



Figure 16. Bumper Guard Installation

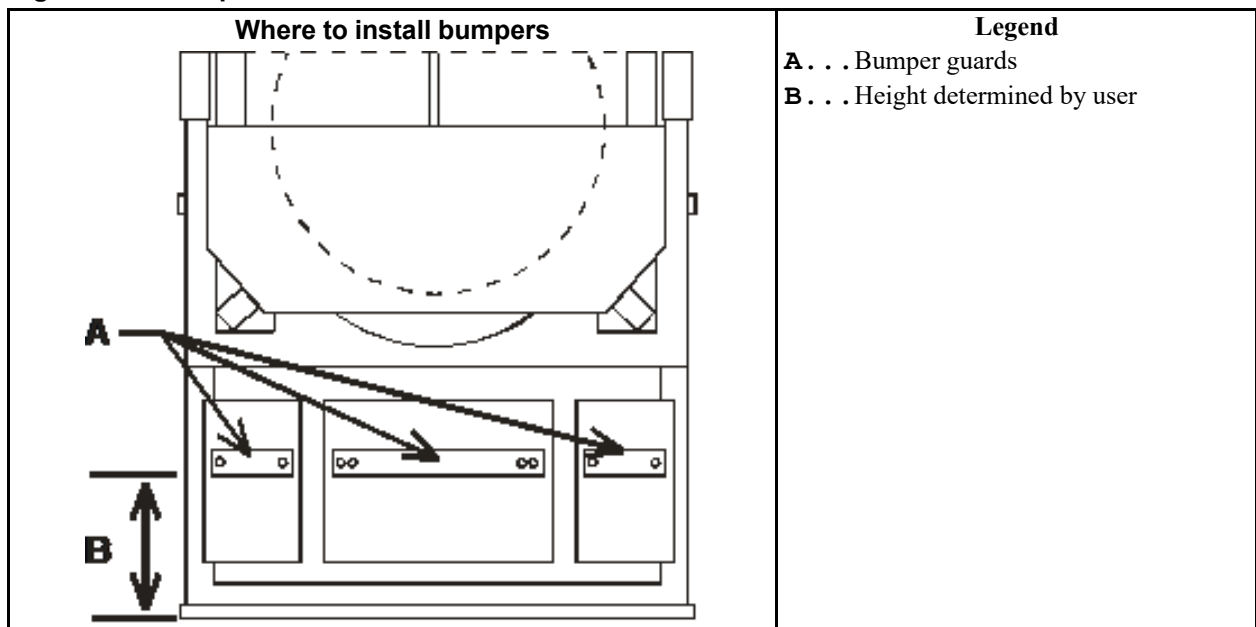

BNDTUM01 / 2025236

BNDTUM01 0000532849

6/6/25, 1:48 PM Released

## 2.4 About The Steam and Hot Oil Control Systems for Milnor® Dryers


BNDTUM01.C01 0000532848 A.1 B.2 11/14/22, 8:50 AM Released

Milnor® steam dryers are available with an optional y-type on/off steam valve. Milnor® hot oil dryers use a modulating oil inlet/bypass valve.

### 2.4.1 How to Protect Steam Coils from Water Hammer Damage

BNDTUM01.C02 0000532847 B.2 A.4 6/4/25, 2:11 PM Released

Steam coils can be damaged when steam pressure is suddenly applied to a water (condensate) filled coil, or when the steam is “wet” with a high water content. The damage occurs because the condensate is forced through the coils with great speed causing a water hammer condition which can be likened to many jack hammers inside the coil. The result will be damaged coils, especially at the ends where the water must turn quickly.



**CAUTION:** Steam coils making a popping sound or cracking sound — are in grave danger of serious water hammer damage. Steam coils that have been damaged by water hammer are not warrantied.

- Maintain the bypass piping (machines with optional on/off valve, [Figure 17: Standard Steam Piping, page 61](#) ) in good working order, to prevent cracking and popping sounds when steam is turned on. Do not operate dryer unless bypass piping is in good working order.

- ▶ If a steam trap must be replaced, be sure the pressure rating of the replacement trap is suitable for the steam pressure in your plant and that the replacement trap's capacity is equivalent to the original equipment.



**CAUTION:** Dryers with steam traps rated 85-180 psi (6-12 atu) will not operate properly below 60 psi (4 atu). Steam traps rated 160-225 psi (11-15 atu) will not operate properly below 115 psi (8 atu). These pressure ranges refer only to the range of pressures through which the trap may be reasonably expected to operate properly. They are not necessarily an indication of the safe operating pressure for the steam coil. Always refer to the nameplate for the specific dryer to determine the maximum permissible pressures.


## 2.4.2 About The Standard Steam Control System

BNDTUM01.C03 0000532846 B.2 A.7 6/5/25, 3:30 PM Released

Each dryer has a strainer and steam trap (Figure 17: Standard Steam Piping, page 61), to handle steam that condenses in the coil as it heats the passing air which dries the goods.



**CAUTION:** Clean and “blow down” steam trap and strainer screens after 40 hours of operation and periodically thereafter. Clogged strainer screens will cause longer drying times.

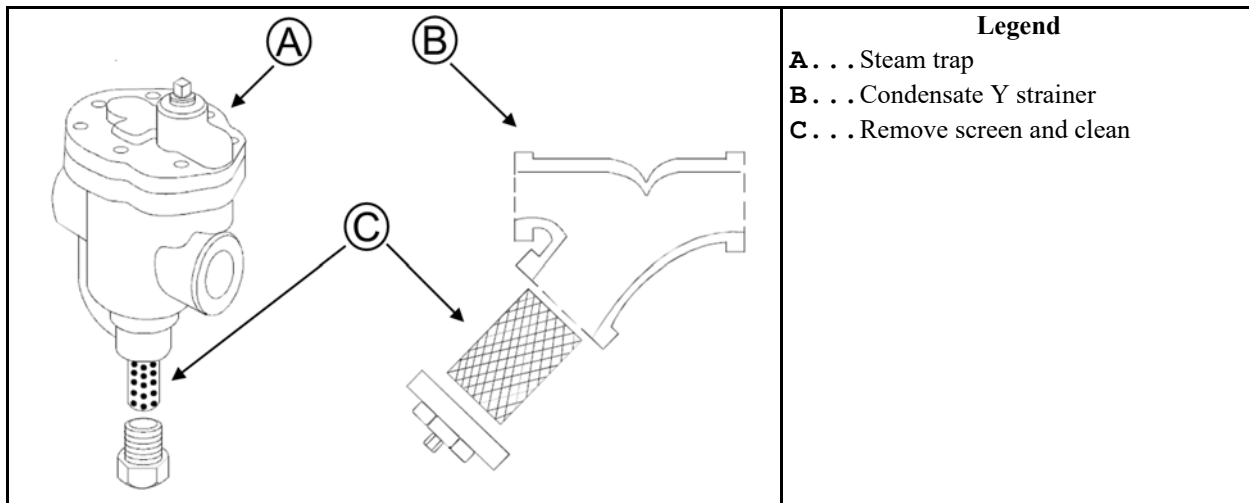


## 2.4.3 About The Optional On-Off Steam Control System with Y-Type, Air Operated Valve

BNDTUM01.C04 0000532845 B.2 A.4 6/5/25, 9:46 AM Released

In addition to the steam trap and strainer, dryers equipped with the optional main steam inlet on/off valve are fitted with:

1. A steam inlet valve which is open whenever the dryer is drying (whenever the cooldown bypass damper is closed). This normally closed (air-to-open) valve shuts off the flow of steam to the dryer during cooldown, if the dryer master switch is off, and whenever the dryer is not being used.
2. Bypass piping to keep coils warm and condensate minimized while the main steam inlet valve is off, but machine is in standby, with steam provided to the machine.

**Figure 17. Standard Steam Piping**

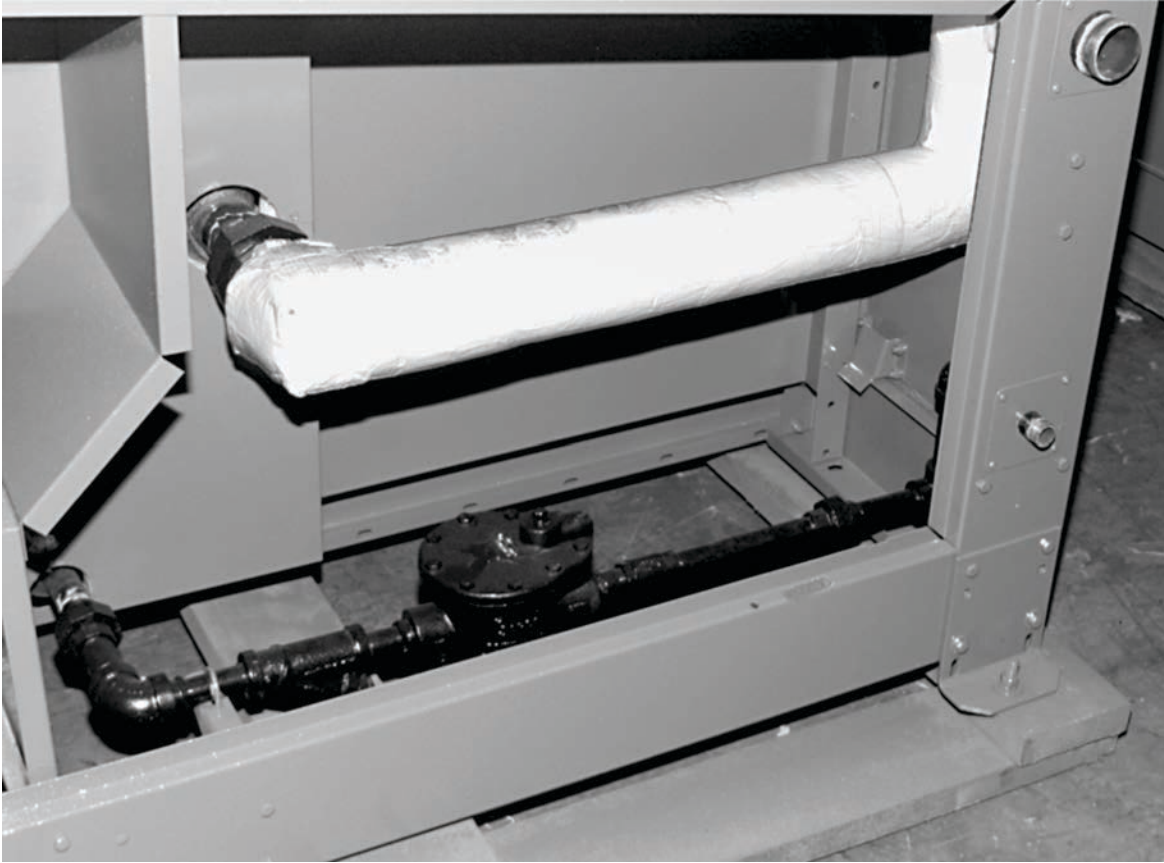

## **2.4.4 About the Modulating Hot Oil Valve**


BNDTUM01.C05 0000532844 A.3 B.2 6/5/25, 9:46 AM Released

### **2.4.4.1 How Modulated Hot Oil Works**

BNDTUM01.C06 0000532843 B.2 A.4 6/5/25, 9:46 AM Released

Hot air inlet and outlet temperatures are monitored by the dryer control. When the dryer control detects actual temperatures that are either under or over the desired value, it signals the hot oil positioner and valve to change the percent of pressurized hot oil sent to the dryer heating coil, versus the percent that bypasses the heating coil. All oil is returned to the oil heater.

**Figure 18. Hot Oil Piping**

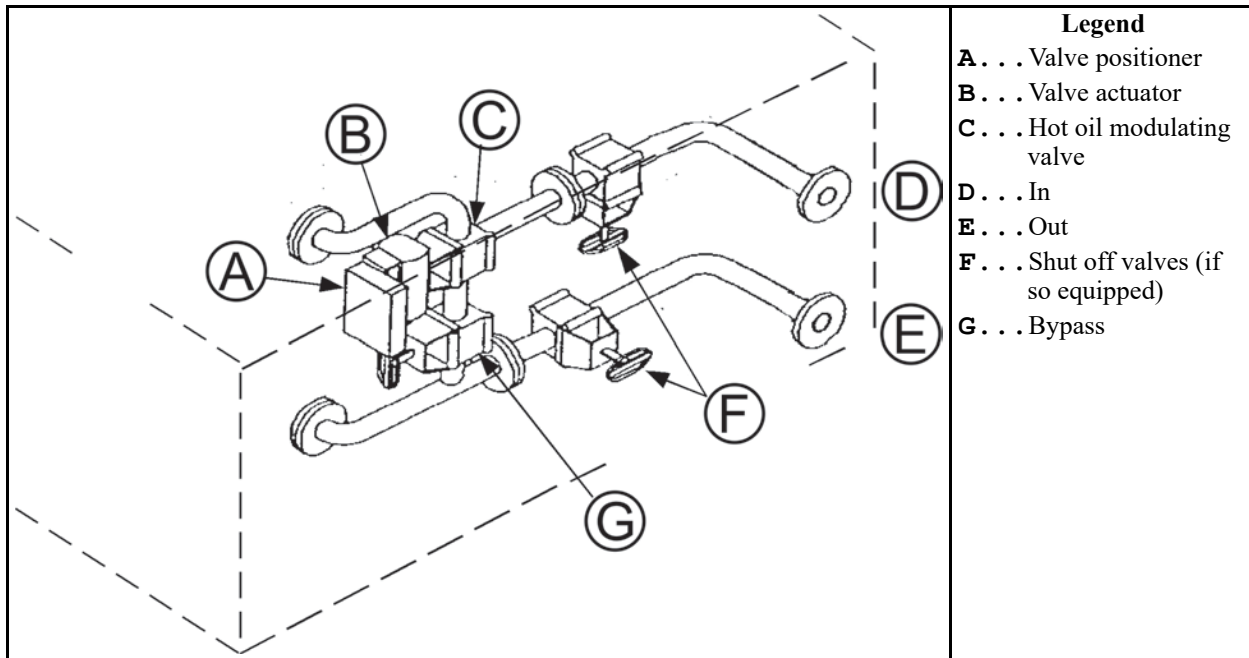

### 2.4.4.2 How to Manually Command a Modulating Valve Position

BNDTUM01.C07 0000532842 A.3 B.2 6/5/25, 9:46 AM Released

This procedure applies to hot oil machines.

1. Shut off oil to dryer.
2. Turn dryer on.

#### Display or Action

WAITING FOR LOAD  
\*\*\*\*\*

SELECT DRYCODE  
00 REDRY

#### Explanation

After the power-up sequences, the display shows this screen.

MANUAL  
LOAD

Accesses manual load menu

#### For Quick Return to Automatic from Manual Load menu

WAITING FOR LOAD  
\*

CANCEL, ESCAPE, CANCEL, ESCAPE etc Returns to automatic

ENTER LOAD SIZE  
0 FULL LOAD

ENTER NEXT Accepts the default drycode 00 and prompts for load size.

LOAD DRYER WITH  
REDRY

ENTER NEXT Accepts the default load size (full load) and prompts the operator to load dryer. Ignore this prompt.

LOADING

ENTER NEXT Starts the cycle. When loading sequence ends, display appears as shown below.

00F TIF TOF 000 VP  
XXX XXXXXXX XXX XXX

Alternates with . . .

00F TIF TOF 0021 AIR  
XXX XXXDXXX XXX

TIFHTOF LDA MVP BSPD  
XXX+XXX XXX XXX XXXX



**Stops the timer and accesses the manual control panel** for temperature, damper, and basket rotation.

hold +

Closes modulating valve position. Hold keys until MVP=000.

TIFHTOF LDA MVP BSPD  
XXX+XXX XXX 000 XXXX

Dryer will continue at minimum valve position until commanded to return to automatic.

Returns to automatic.

Follow the step-by-step procedure to set the system components.

### 2.4.4.3 When Recalibration is Required

BNDTUM01.T01 0000537274 B.2 A.6 6/5/25, 10:57 AM Released

The hot oil positioner and valve are calibrated prior to shipping, replacing either component necessitates re-calibration. To recalibrate:



**DANGER: Shock Hazard** — Electrical power can cause death or severe injury. Lock off and tag out power to the dryer main bus at the wall disconnect before servicing.


1. Turn machine off, lock off and tag out.



**WARNING: Burn Hazard** — Hot surfaces will cause severe burns. Shut off and tag out hot oil flow to dryer at external shut-off valve and allow piping to cool before servicing.

2. Shut off the hot oil to the dryer, tag out external valve.
3. Remove the valve positioner covers and the position indicator dial.
4. Verify that the lower arm bearing rests on the portion of the cam labeled 0-100%. See [Figure 20: Cam Setting at Modulating Valve Position 000, page 65](#).
5. Check that two gain suppression springs are mounted in positions 1 and 4 (as shown in [Figure 19: Hot Oil Modulating Valve and Positioner, page 64](#)).

**Figure 19. Hot Oil Modulating Valve and Positioner**

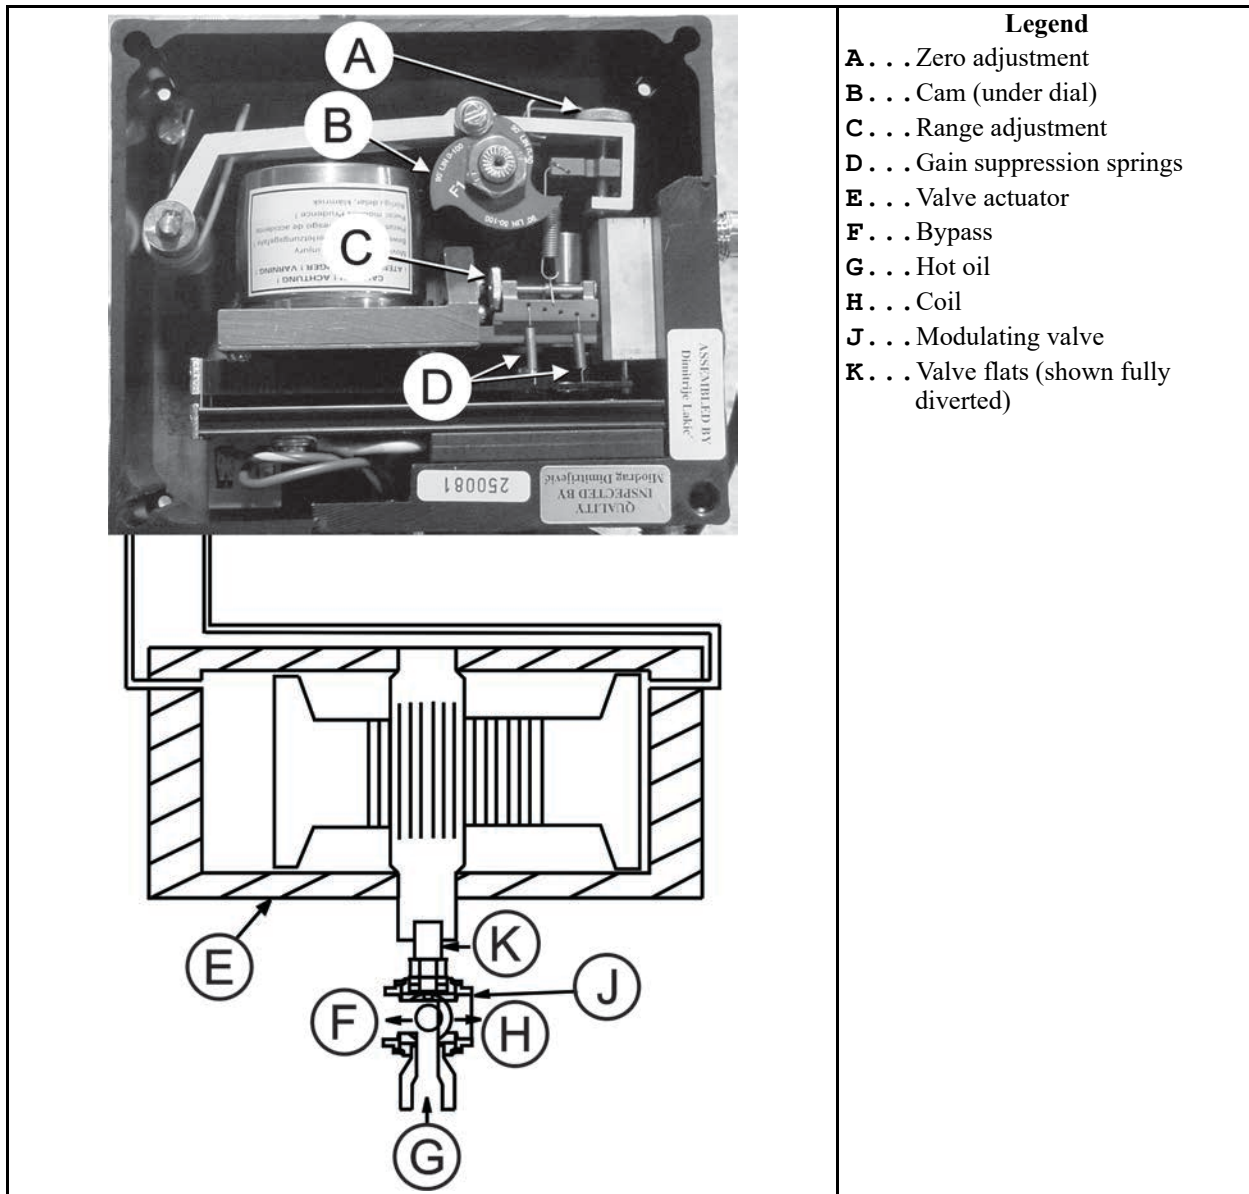

## 2.4.5 Calibrating the Hot Oil Positioner/Valve

BNDTUM01.C08 0000537326 A.3 B.2 6/5/25, 3:10 PM Released

The positioner cam must be adjusted so that the valve travels from fully diverted to fully open as the modulating valve position varies from 000 to 255. Refer to [Section 2.4.4.2 : How to Manually Command a Modulating Valve Position, page 62](#) elsewhere in this section then follow the step by step procedures below.





**WARNING: Electric shock hazard** — machine power is on and positioner covers removed for the following procedures. Exposed terminals are energized at 120vac or higher. You can be killed or severely injured by contact with these terminals. Do not touch any wire terminals when calibrating or verifying settings.

- Calibrating the positioner/valve for minimum temperature

### 2.4.5.1 Calibrating the Positioner/valve for Minimum Temperature

BNDTUM01.T02 0000537325 B.2 A.4 6/5/25, 3:23 PM Released


- | Display or Action | Explanation   |
|-------------------|---|
|                   | hold  Closes modulating valve. Hold keys until MVP=000. |
1. Check that the lower arm ball bearing rests near the deepest part of the cam curve as shown on [Figure 20, page 65](#). If not, move the zero adjustment thumbwheel ([Figure 19: Hot Oil Modulating Valve and Positioner, page 64](#)) until the ball bearing is in this position. If this cannot be achieved, loosen the cam retaining nut, move the cam, then use the zero adjustment thumbwheel for adjustment (the cam may rotate slightly with the nut as it is tightened, be sure to allow for this).
  2. After setting, check that the modulating valve flats are aligned at a 90 degree angle to the modulating valve ([Figure 19: Hot Oil Modulating Valve and Positioner, page 64](#) and [Figure 22: Modulating Valve Flats, page 67](#)). This ensures no hot oil reaches the dryer heating coil. All of the hot oil is returned to the heater.

- | Display or Action | Explanation   |
|-------------------|---|
|                   | hold  Opens modulating valve. Hold keys until MVP=255 |



**NOTE:** Due to mechanical considerations, settings past 200 have a very minor effect on the valve.

**Figure 20. Cam Setting at Modulating Valve Position 000**

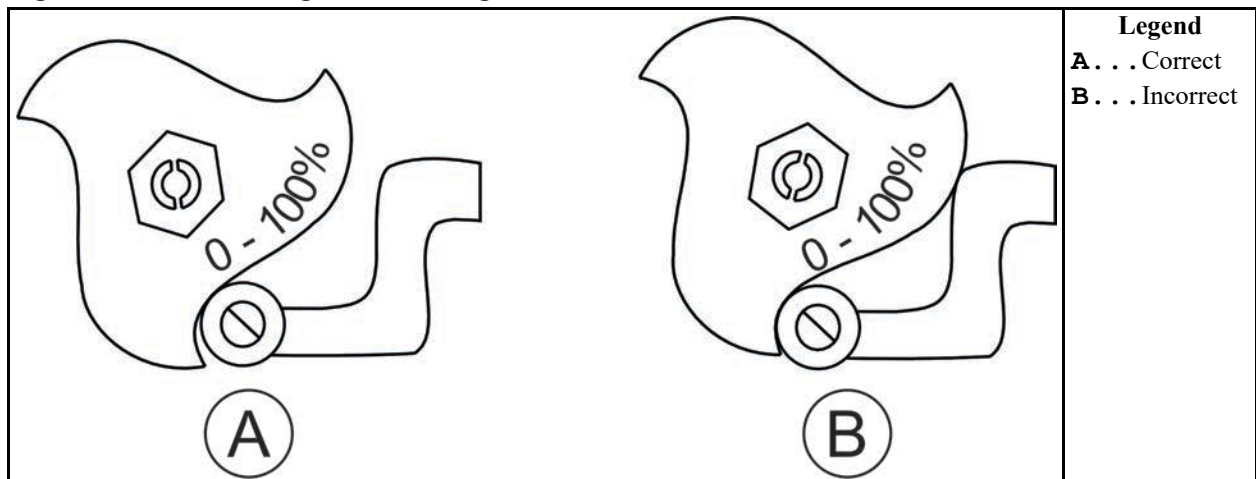


### 2.4.5.2 Calibrating the Positioner/Valve For Maximum Temperature

BNDTUM01.T03 0000537324 B.2 A.5 6/5/25, 10:57 AM Released

1. Check that the lower arm ball bearing rests on the highest part of the cam curve (Figure 21: [Cam Setting at Modulating Valve Position 255, page 66](#)). If the ball bearing is not at the tip, turn the range adjustment (Figure 19, page 64).
2. After setting, check that the diverter valve flats are aligned exactly parallel to the diverter valve, permitting full flow to the dryer heating coil.

Figure 21. Cam Setting at Modulating Valve Position 255

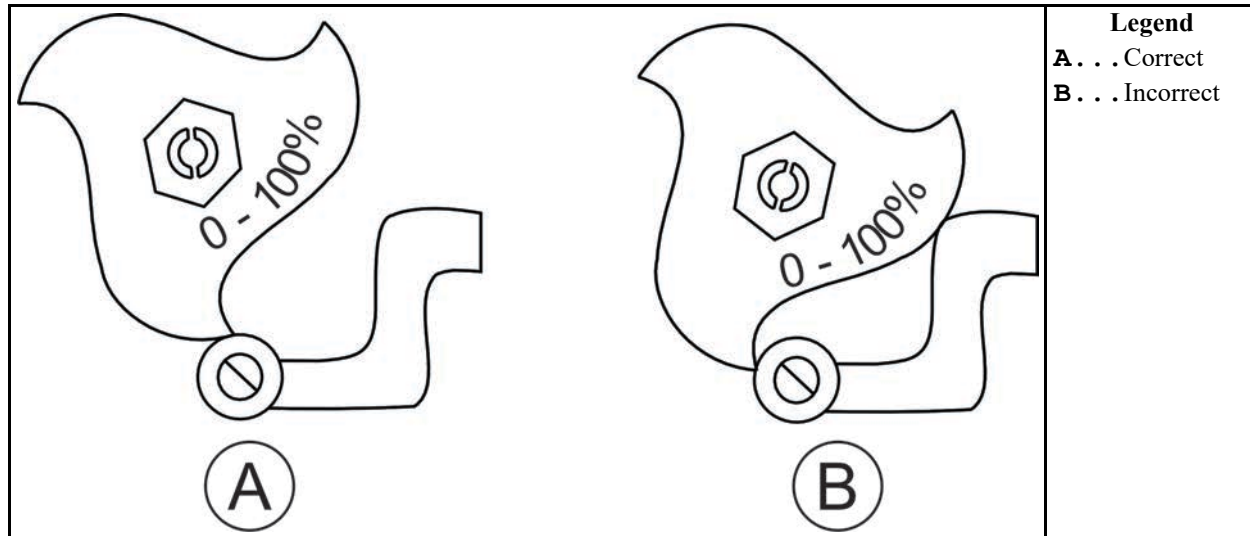



### 2.4.5.3 Verifying Positioner/Valve Settings

BNDTUM01.C09 0000537323 A.3 B.2 6/5/25, 9:46 AM Released

#### Display or Action

TIFHTOF	LDA	MVP	BSPD
xxx+xxx	xxx	200	xxx

#### Explanation


hold  +  Closes modulating valve. Hold until MVP= 200, verify settings then repeat for 150, 100, 050, and 000.

Since the zero and range adjustments affect each other, verify that for each of the five MVP's commanded, the valve moves approximately 1/5 of the way from fully open to fully diverted, and:

- The ball bearing follows the cam slope evenly.
- The cam zero and range settings are correct for fully open and fully diverted positions.




**Figure 22. Modulating Valve Flats**

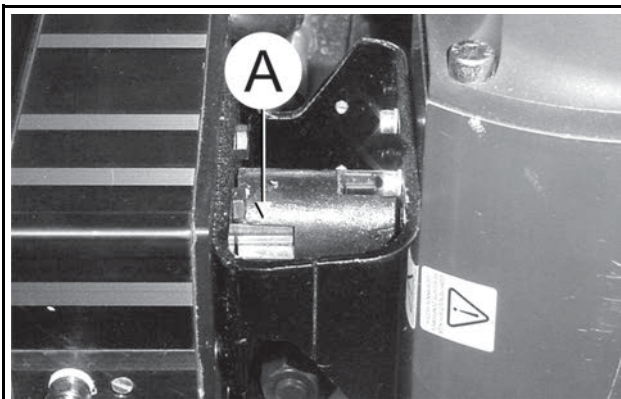


**Legend**

**A . . .** Valve flats (shown in fully diverted position)

# 3 Dimensional Drawings


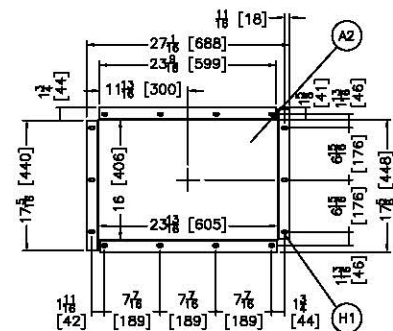


BLOWER INTAKE  
DUCT DETAIL




BLOWER EXHAUST  
TO REAR  
DUCT DETAIL  
SEE NOTE 13.


ZERO PEDESTAL SHOWN  
ADJUST ALL VERTICAL DIMENSIONS  
TO THE PEDESTAL SPECIFIED.  
SEE NOTE 12.

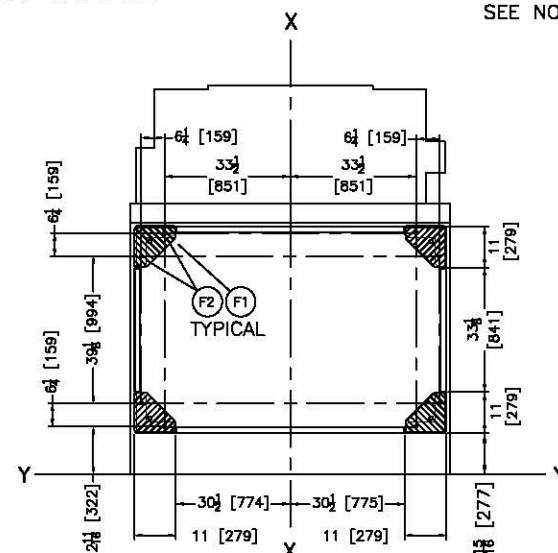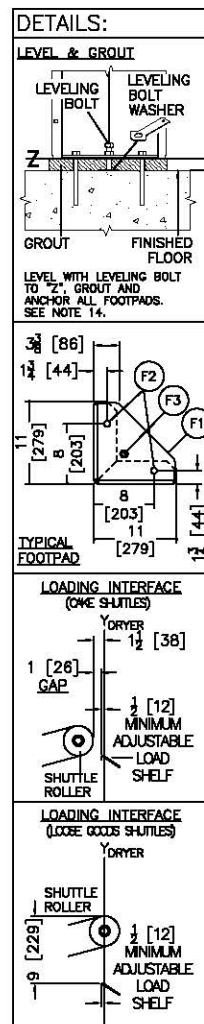


FOUNDATION PLAN

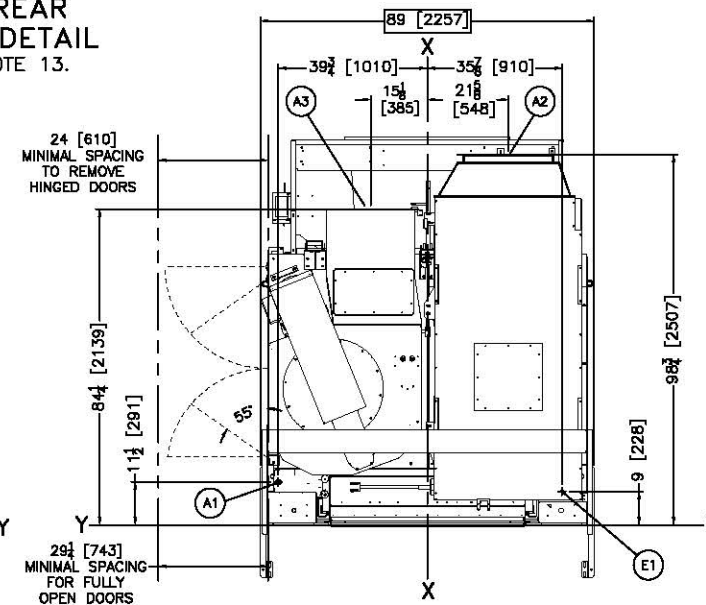


PLAN VIEW

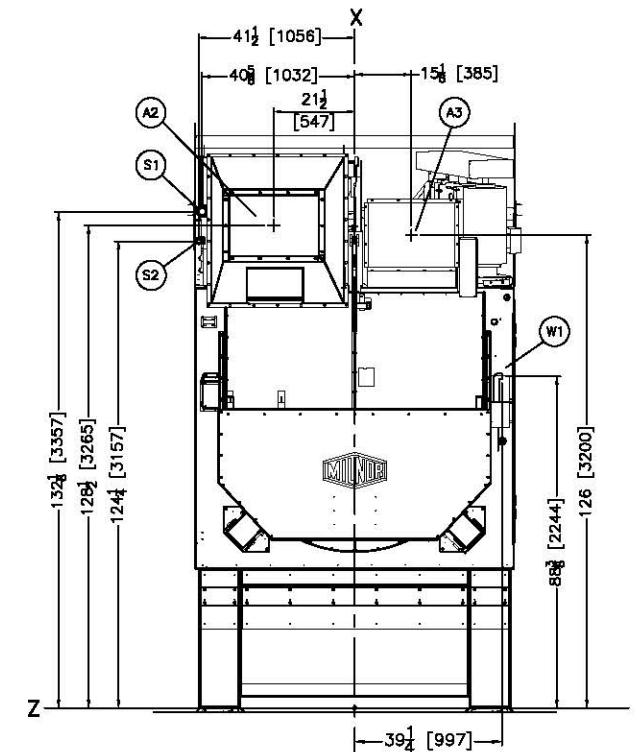


REAR VIEW

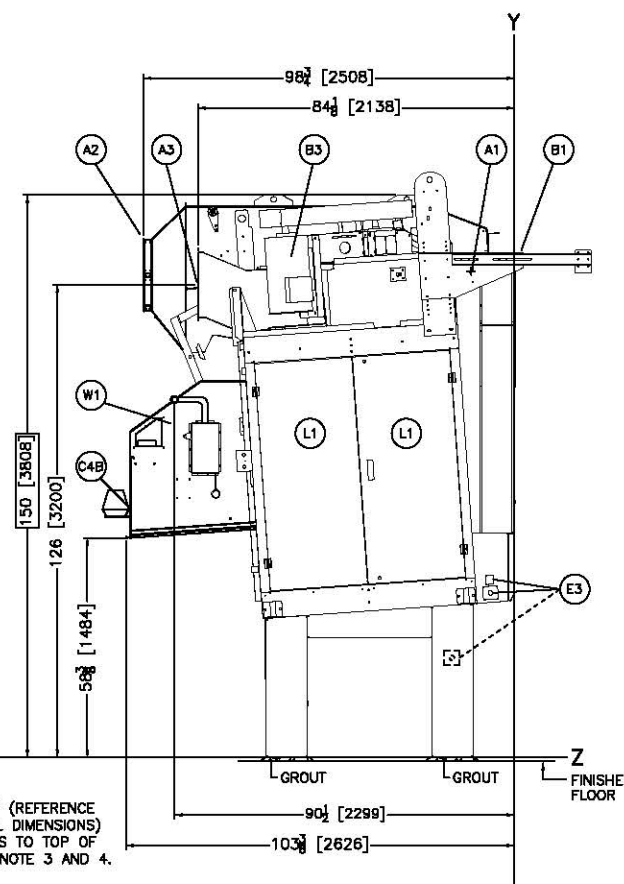

LEFT VIEW

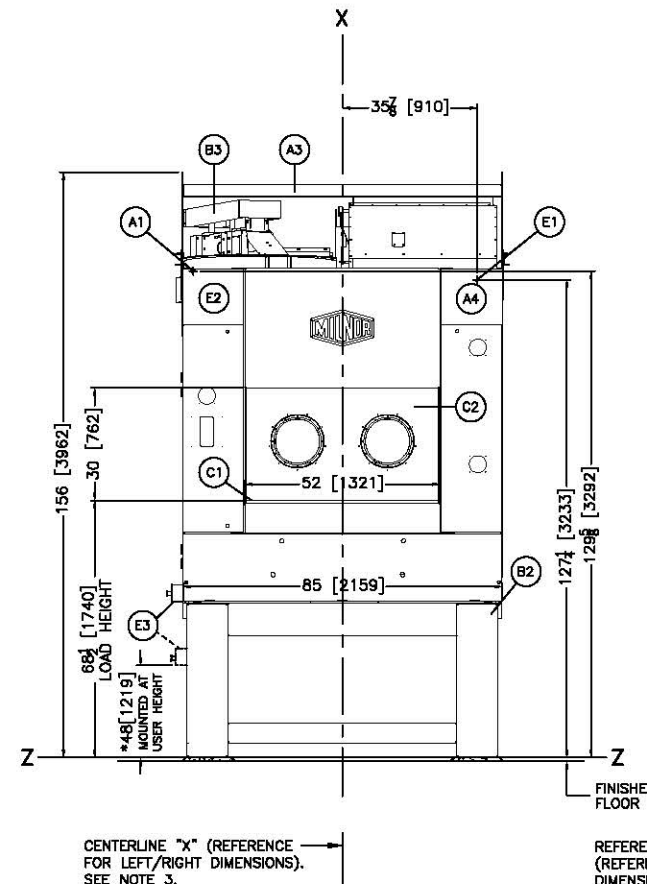

FRONT VIEW

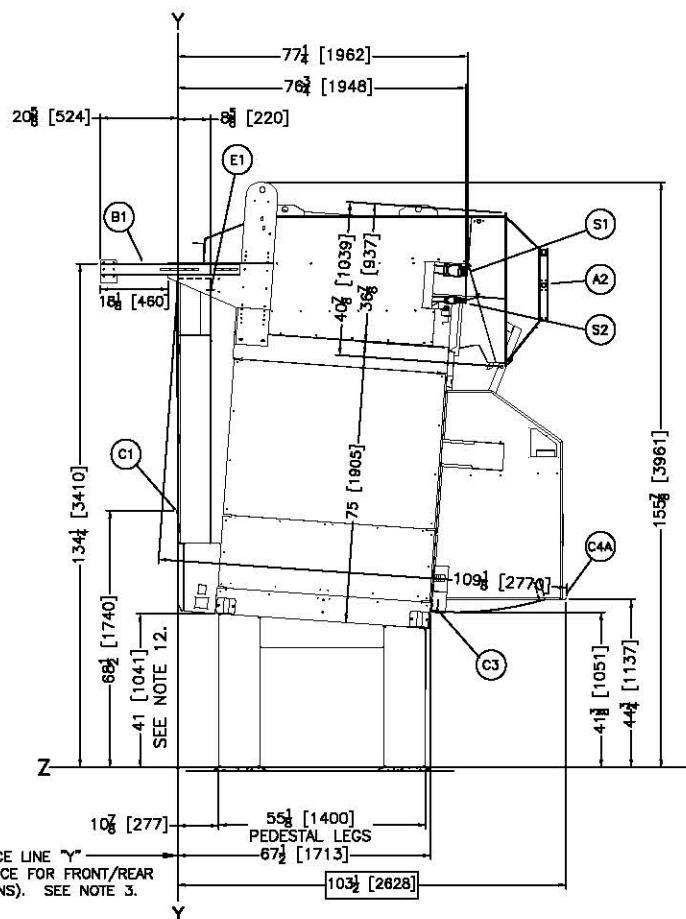

RIGHT VIEW

W1	SPRINKLER WATER INLET, 1-1/4" NPT
S2	STEAM CONDENSATE OUT, 1" NPT
S1	STEAM INLET, 2" NPT
L1	REMOVABLE ACCESS DOORS
H3	5/16" [7] DIA. X 3/4" [19] SLOTS, 8 PLACES
H2	5/16" [7] DIA. X 1/2" [13] SLOTS, 8 PLACES
H1	.406" [10] DIA. X 3/4" [19] SLOTS, 14 PLACES
F3	LEVELING BOLT (5/8"-11 X 3") SUPPLIED.
F2	ANCHOR BOLT HOLES, 13/16" [21] DIA. 8 PLACES
F1	DRYER FOOT SUPPORT PLATES, SEE NOTE 14.
E3	EMERGENCY STOP & DOOR OPEN CONTROLS
E2	MICROPROCESSOR BOX
E1	MAIN ELECTRICAL CONNECTION
C4B	OPTIONAL SHORT SHROUD
C4A	DISCHARGE SHROUD
C3	DISCHARGE DOOR
C2	LOAD DOOR, 52" WIDE
C1	LOAD HEIGHT
B3	BLOWER MOTOR
B2	DRYER TO DRYER MOUNTING BRACKET
B1	SHUTTLE RAIL SUPPORT
A4	AIR VALVE BOX
A3	BLOWER EXHAUST REAR, STANDARD, SEE DETAIL.
A2	BLOWER INTAKE, SEE DETAIL.
A1	MAIN AIR CONNECTION 1" NPT
ITEM	LEGEND

- NOTES**
- 15 FOR UTILITY REQUIREMENTS FOR GAS, STEAM, THERMAL OIL, AIR INTAKE, AND WATER SUPPLY, SEE DOCUMENT BIPDUI01/20160505 OR LATER.
- 14 DRYER FOOT SUPPORT PLATES ARE WELDED TO THE BOTTOM OF PEDESTAL LEGS TO ALLOW A GREATER GROUTING SURFACE BETWEEN PEDESTAL LEGS AND FINISHED FLOOR. USE LEVELING BOLTS TO LEVEL THE DRYER TO BASELINE "Z" (COINCIDES WITH BOTTOM OF LEGS). DRYER FEET MUST BE GROUTED & ANCHORED TO FLOOR.
- 13 EXHAUST DUCTING: DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND/OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
- 12 THIS DRAWING SHOWS THE BASIS18 DRYER USING A 41" [1041] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL, STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
- 11 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
- 10 MINIMUM CLEARANCE FOR MAINTENANCE = 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSH0006, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
- 9 DRYER IS DISASSEMBLED INTO THREE COMPONENTS FOR SHIPPING, THE BASE, THE HOUSE, AND THE TOP OF THE BLOWER INTAKE DUCT. CONSULT MILNOR FACTORY IF ADDITIONAL COMPONENTS, SUCH AS BLOWER HOUSING, MUST BE REMOVED TO FIT MACHINE THROUGH OPENING.
- 8 DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
- 7 CONTROL PANEL FOR DRYER MAY BE INSTALLED IN ANY CONVENIENT LOCATION. CONTROL CABLE FROM DRYER TO PANEL IS SUPPLIED BY MILNOR AND PRICED SEPARATELY.
- 6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (e.g. BARE CONCRETE, BRICK, ETC.)  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
- 5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
- 4 BASELINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM RAIL OF THE SHUTTLE. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
- 3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
- 2 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
- 1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.






**ATTENTION**

MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

**ATTENTION**

THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

ZERO PEDESTAL SHOWN  
ADJUST ALL VERTICAL DIMENSIONS  
TO THE PEDESTAL SPECIFIED.  
SEE NOTE 8.

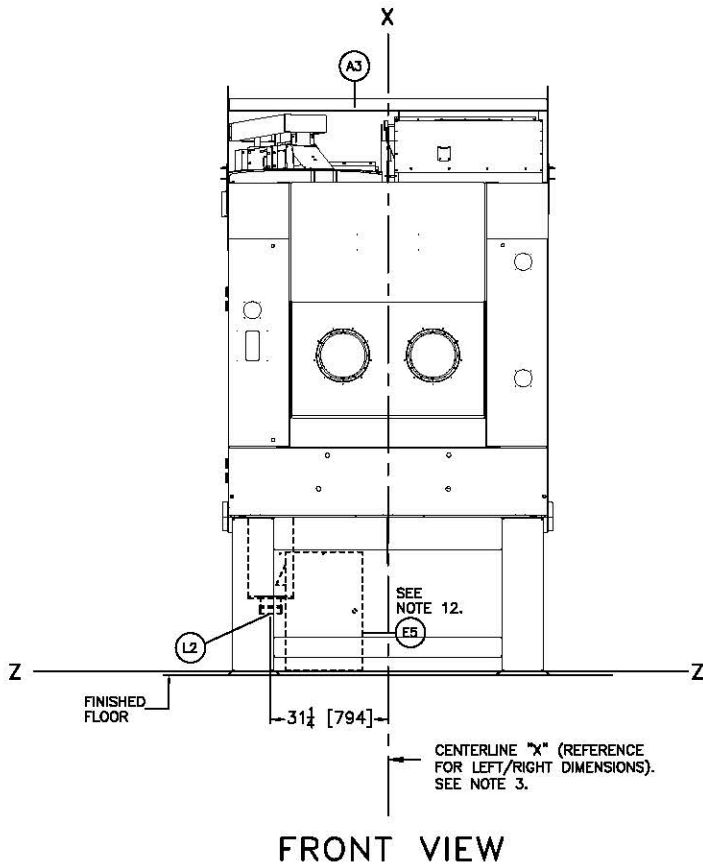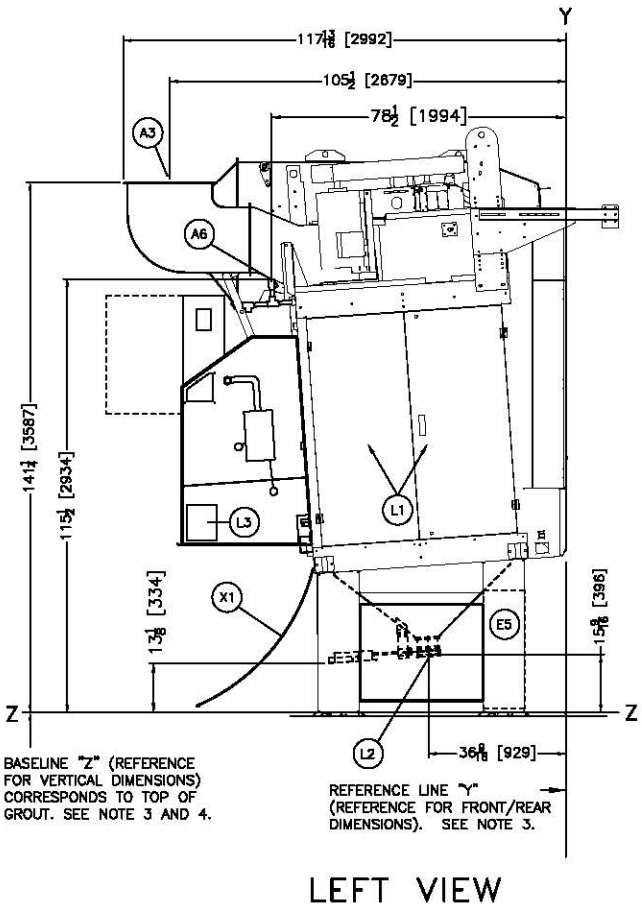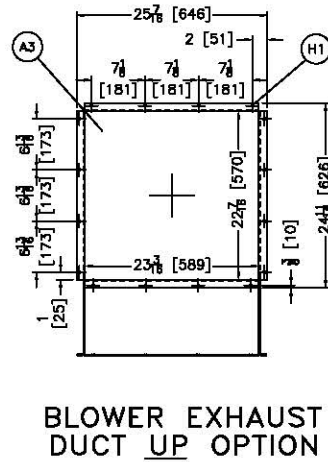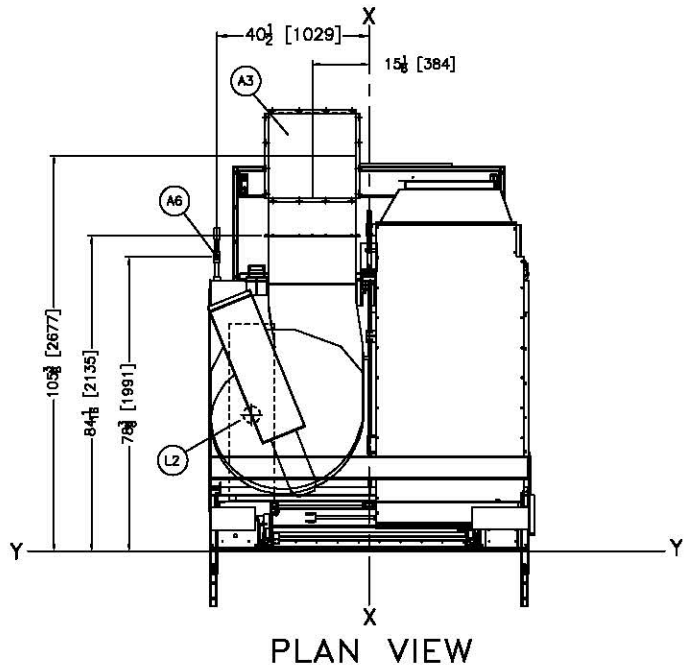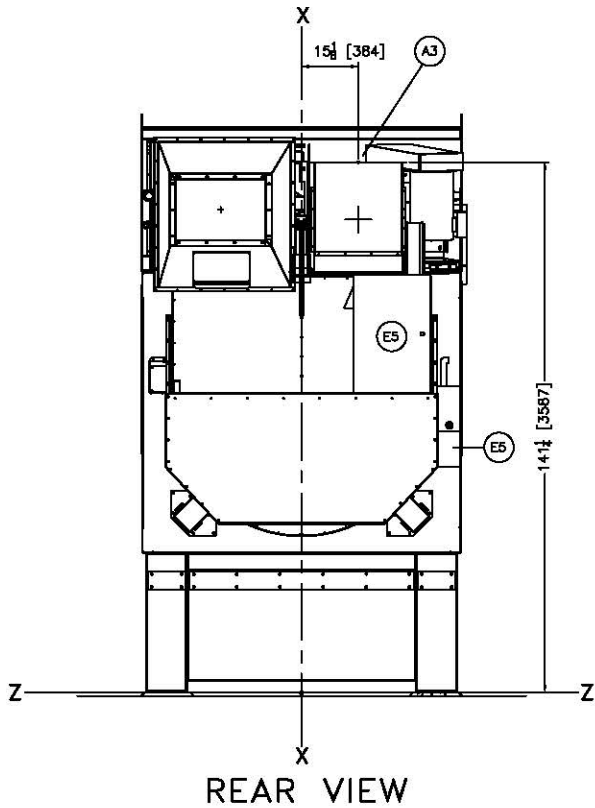

X1	OPTIONAL UNLOAD BRIDGE, 48" PLASTIC SHEETING
L3	INTERNAL LINT SCREENS AIR VALVE BOX.
L2	LINT OUTLET (6" FLEX HOSE CONNECTION) FOR OPTIONAL INTERNAL LINT SCREEN. PIPES TO DRYVAC01, DRYVAC02 OR LINT COLLECTOR BY OTHERS. SEE NOTES 9 & 10 AND DRAWING BD6458DLCPE FOR RECOMMENDED PIPING.
L1	OPTIONAL INTERNAL LINT SCREENS, BEHIND PANELS
H1	BOLT SLOTS, 5/16" [7] DIA.
E5	OPTIONAL INVERTER BOX IS LOCATED AS SPECIFIED ON THE DISCHARGE SHROUD, PEDESTAL FRONT, OR FOR REMOTE MOUNTING.
A6	1" NPT AIR CONNECTION/OPTIONAL INTERNAL LINT SCREENS
A3	BLOWER EXHAUST DUCTING UP OPTION, SEE DETAIL.
ITEM	LEGEND


NOTES	
14	FOR UTILITY REQUIREMENTS FOR GAS, STEAM, THERMAL OIL, AIR INTAKE, AND WATER SUPPLY, SEE DOCUMENT BIPDU01/20160505 OR LATER.
13	A WATER SEPARATOR (NOT SUPPLIED BY PMC) IS REQUIRED FOR THE INCOMING AIR TO THE INTERNAL LINT SYSTEM.
12	OPTIONAL INVERTER BOX MAY BE SPECIFIED FOR PEDESTAL MOUNT ON 48" [1219] (ZERO PEDESTAL PLUS 7" [178]) AND TALLER PEDESTALS ONLY.
11	OPTIONAL INTERNAL LINT SCREENS IS AVAILABLE FOR DRYERS WITH 41" [1041] AND TALLER PEDESTALS ONLY.
10	FOR OPTIONAL INTERNAL LINT SCREENS, IT IS RECOMMENDED TO HAVE A 60 GALLON COMPRESSED AIR BOOSTER TANK FOR EVERY 5 DRYERS.
9	EXHAUST DUCTING: DRYER OPERATES UP TO 8500 SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
8	THIS DRAWING SHOWS THE 6458TS1L DRYER USING A 41" [1041] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
7	DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
6	AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS: 36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL. 42 [1067] IF OBJECT IS A GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.). 48 [1219] IF OBJECT IS ANY LIVE PART. CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
5	CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
4	BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
3	USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
2	NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
1	ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.


**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

#### 6458TS1L OPTIONS




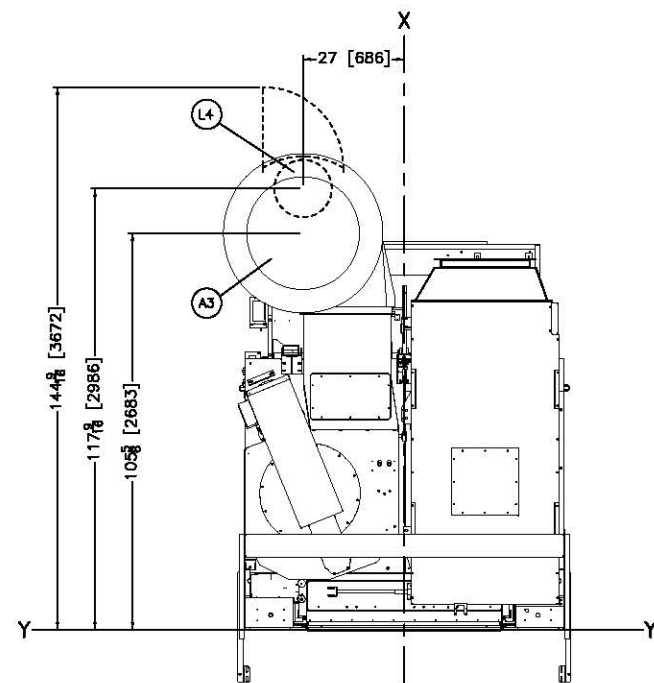


PLAN VIEW  
LINT OUTLET TO BAG COLLECTOR

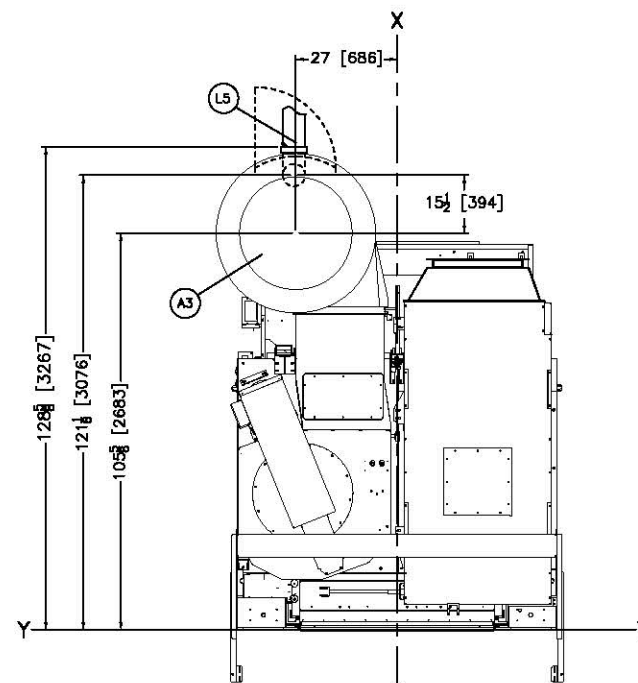


PLAN VIEW  
LINT OUTLET TO VACUUM COLLECTOR

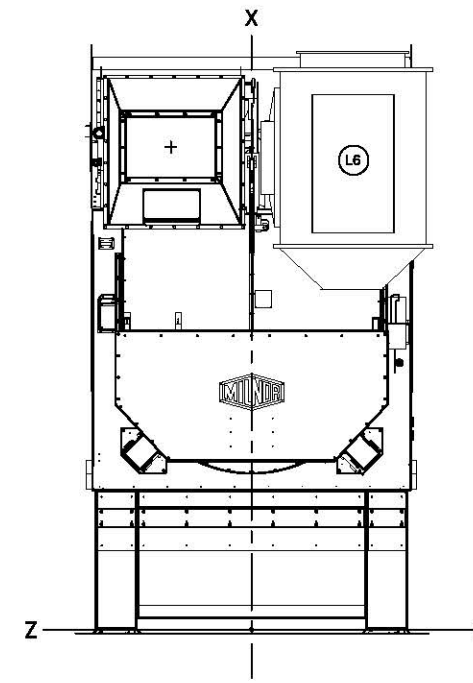


REAR VIEW  
LINT OUTLET TO BAG COLLECTOR

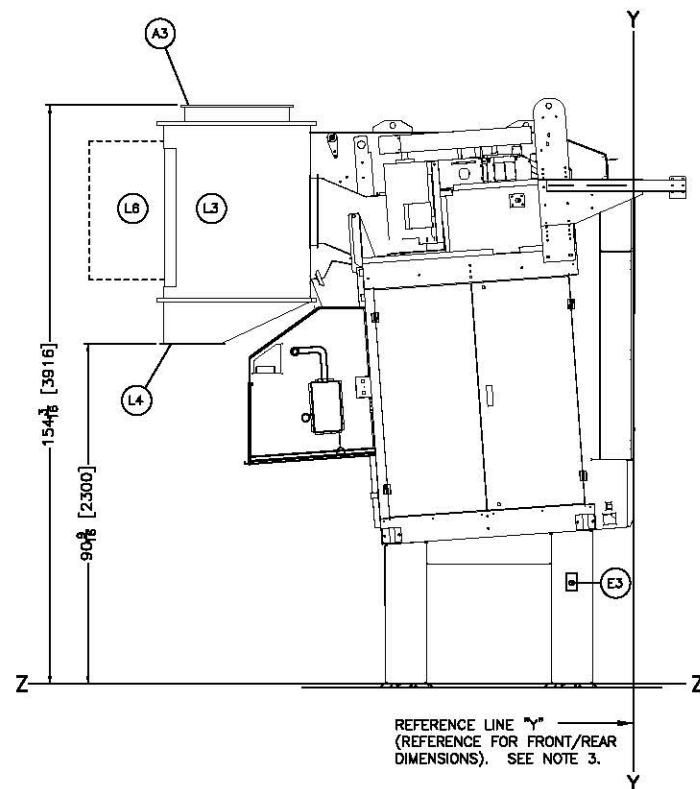


LEFT VIEW

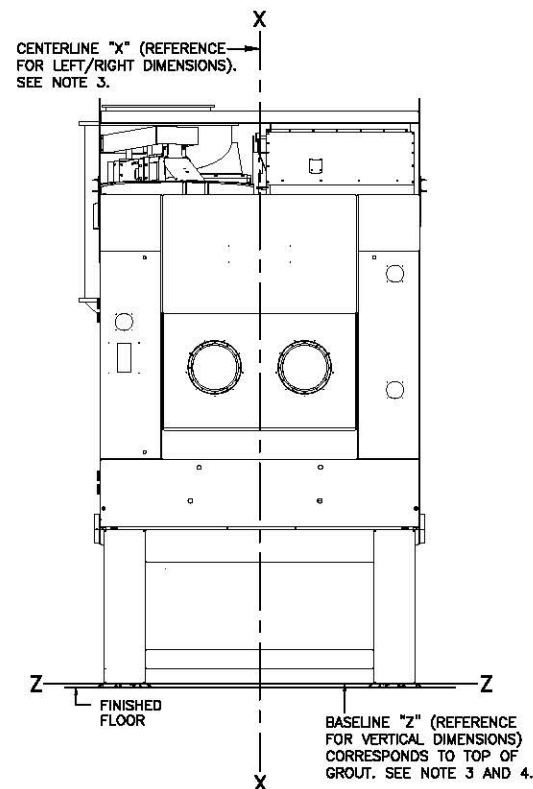

FRONT VIEW

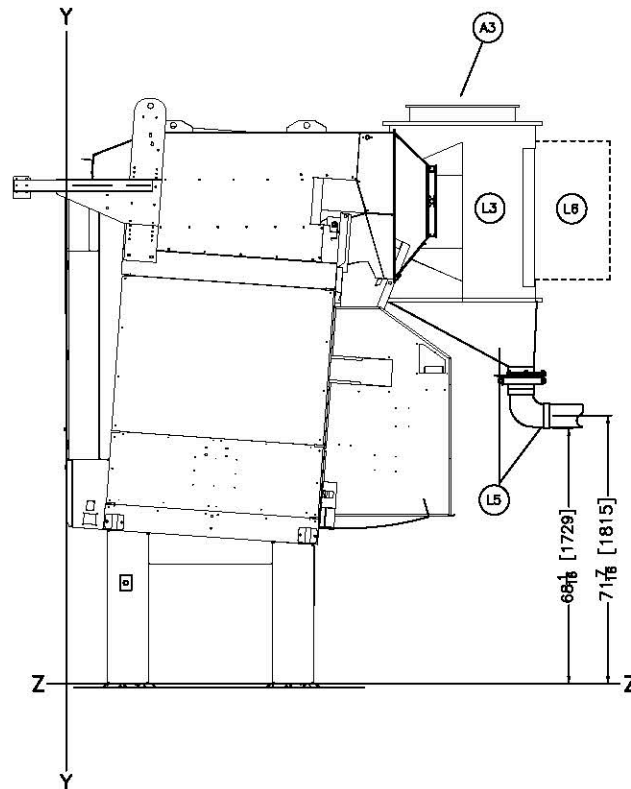

RIGHT VIEW

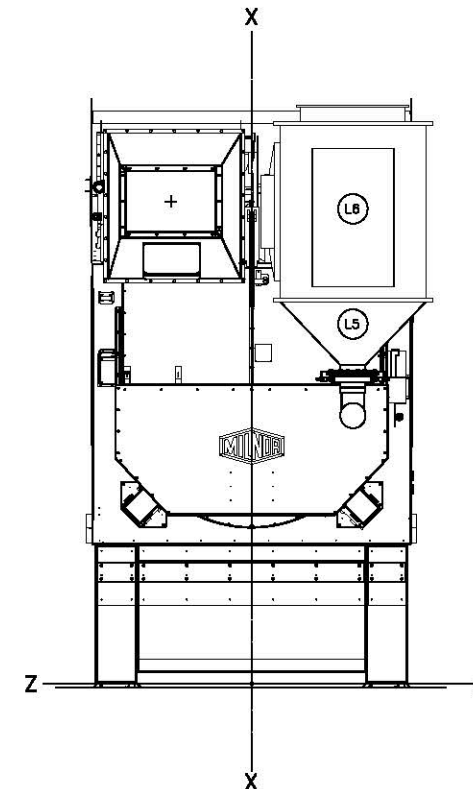

REAR VIEW  
LINT OUTLET TO VACUUM COLLECTOR

L6	HINGED ACCESS DOOR
L5	CONE, LINT COLLECTION OUTLET TO VACUUM COLLECTOR DISCHARGE, 6" PIPE CONNECTION
L4	CONE, LINT COLLECTION OUTLET TO BAG, DISCHARGE 15-1/2" ID FLANGED OUTLET
L3	MLF1010 LINT FILTER (LINT FILTER SUPPORTED BY OTHERS)
A3	EXHAUST DUCT, 28" [711] DIAMETER
ITEM	LEGEND

- NOTES**
- EXHAUST DUCTING: DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THIS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
  - DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
  - MINIMUM CLEARANCE FOR MAINTENANCE - 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSHILCUBE, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
  - DRYER IS DISASSEMBLED INTO THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE RECIRCULATION DUCTING. CONSULT MILNOR FACTORY IF COMPONENTS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.
  - DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
  - THIS DRAWING SHOWS THE 6458L DRYERS USING A 41T [1041] PEDESTAL BASE. WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
  - AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (e.g. BARE CONCRETE, BRICK, ETC.).  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
  - CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM EQUIPMENT.
  - BASILINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
  - USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
  - NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
  - ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.


**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

6458TS1L + MLF1010

DM 0 0.5M 1M DWG# BD6458TS1LEC 2016236D  
INCHES 0 12 24 36

**MILNOR PELLERIN MILNOR CORPORATION**  
P.O. Box 400 Kenner, LA 70063, USA, Phone 504/487-8581, FAX 504/488-3084, Email: milnorinfo@milnor.com



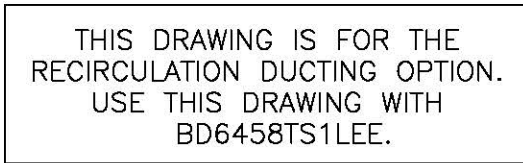

## NOTES

- 12 EXHAUST DUCTING: DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED DEPENDING ON THE SIZE OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
- 13 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
- 14 MINIMUM CLEARANCE FOR MAINTENANCE - 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSHTCLBRE, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
- 15 DRYER IS DISASSEMBLED INTO THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE REGULATION DUCTING. CONSULT MILNOR FACTORY IF CUSTOMERS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.
- 16 DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
- 17 THIS DRAWING SHOWS THE 6408BTG1 DRYER USING A 41"x110" PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL, STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
- 18 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
 36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
 42 [1067] IF OBJECT IS A GROUNDED WALL (ie. BARE CONCRETE, BRICK, ETC.)  
 48 [1219] IF OBJECT IS ANY LIVE PART.  
 CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
- 19 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
- 20 BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
- 21 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
- 22 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
- 23 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION. THERE IS NO USE FOR CONSTRUCTION OF THE MACHINE UNLESS CERTIFIED, AND IN NO EVENT IS THE PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

## ATTENTION

MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

## ATTENTION

THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GROUND, THE WATER, AND THE REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

**MILNOR**

P.O. Box 400 Kanner, LA 70083, USA Phone 504/467-8551,  
FAX 504/468-3094, Email milnorusa@milnor.com

Figure 1: Typical 14 Places layout. The diagram shows a rectangular layout with dimensions in feet and inches, and millimeters in brackets. The overall dimensions are 27' 7 1/8" [888] by 19' 8" [492]. The inner dimensions are 23' 3 1/8" [605] by 16' 8" [410]. The border dimensions are 1' 7 1/8" [448] on the left, 1' 1 1/8" [46] on the top, 1' 3/8" [44] on the bottom, and 1' 1 1/8" [46] on the right. The central area is 23' 3 1/8" [605] by 16' 8" [410]. Callouts A2 and H1 point to specific features.

Technical drawing of the front view of the machine. The drawing shows a large rectangular machine with a circular component on the left side. Dimensions are indicated by lines and numbers in millimeters [value in inches]. Labels A2, A3, and L4 are used to identify specific components.

- Overall width: 1448 [3672]
- Overall height: 1178 [2986]
- Height of the lower section: 1058 [2683]
- Distance from the top edge to the center of the circular component: 271 [687]
- Distance from the top edge to the top of the rectangular component on the right: 2018 [523]
- Label A2 points to the top of the rectangular component on the right.
- Label A3 points to the circular component.
- Label L4 points to the center of the circular component.

Diagram showing the front elevation of the equipment. The centerline is marked 'X'. The finished floor is indicated by a horizontal line labeled 'Z'. The equipment features two large circular openings in the center. Callouts include 'A3' pointing to the top left corner and 'R1' pointing to a curved surface on the right side. A note at the bottom right states: "CENTERLINE 'X' (REFERENCE FOR LEFT/RIGHT DIMENSIONS) SEE NOTE 3."

Technical drawing of the front view of the machine. Dimensions are given in inches [mm].

- Overall width: 144 $\frac{1}{8}$  [3672]
- Overall height: 128 $\frac{3}{8}$  [3267]
- Height from base to top of main body: 121 $\frac{1}{8}$  [3076]
- Height from base to top of main body (excluding top section): 105 $\frac{5}{8}$  [2683]
- Height of top section: 15 $\frac{1}{2}$  [394]
- Height of top section (excluding top flange): 27 $\frac{7}{8}$  [687]
- Height of top flange: 20 $\frac{3}{8}$  [523]
- Height of bottom section: 128 $\frac{3}{8}$  [3272]

Labels:

- A2: Top flange
- A3: Main body
- L5: Top flange (inner)

R1	RECIRCULATION DUCT
L6	HINGED ACCESS DOOR
L5	CONE, LINT COLLECTION OUTLET TO VACUUM COLLECTOR DISCHARGE, 6" PIPE CONNECTION
L4	CONE, LINT COLLECTION OUTLET TO BAG, DISCHARGE 15-1/2" ID FLANGED OUTLET
L3	MLF1010 LINT FILTER (SUPPORTED BY OTHERS)
H1	3/8" [10] DIAMETER X .3/4" SLOTS, 14 PLACES
A3	BLOWER EXHAUST, 28" [711] DIAMETER
A2	BLOWER INTAKE
ITEM	LEGEND

2	EXHAUST DUCTING DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF 10" TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THIS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT GALLING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 18 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
11	DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
10	MINIMUM CLEARANCE FOR MAINTENANCE = 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRYER SPECIFICATIONS FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
9	DRYER IS DISASSEMBLED THROUGH THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE RECIRCULATION DUCTING. CONSULT MILLOR FACTORY IF COMPONENTS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.
8	DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
7	THIS DRAWING SHOWS THE 6458_DRYERS USING A 41" [1041] PEDESTAL BASE. WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE USED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
6	AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS: 36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL. 42 [1067] IF OBJECT IS A GROUNDED WALL (ie. BARE CONCRETE, BRICK, ETC.). 48 [1219] IF OBJECT IS ANY LIVE PART. CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
5	CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
4	BASILINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASILINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASILINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVERSING SHUTTLES, BASILINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASILINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASILINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
3	USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
2	NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
1	ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PER-PIRE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.


**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.


DM 0 0.5M 1M  
INCHES 0 12 24 36

DWG# BD6458TS1LEF  
2016236D



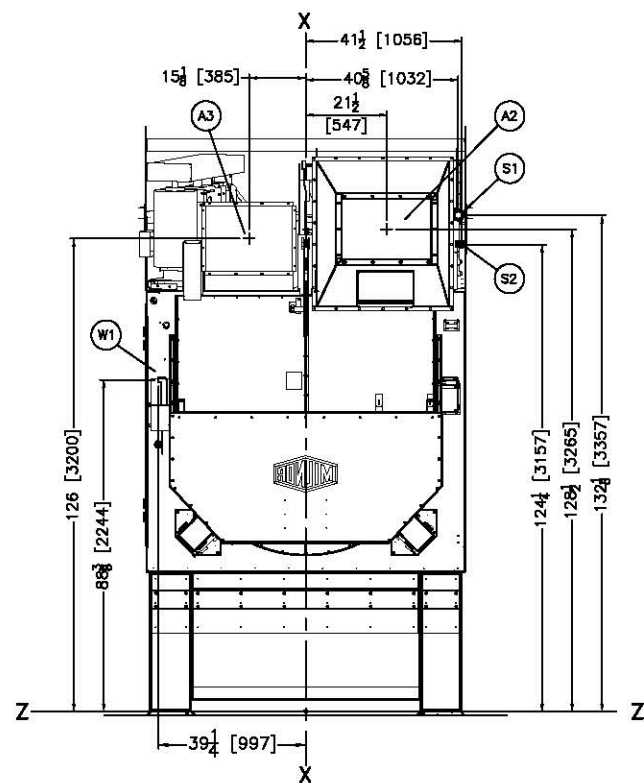


REAR VIEW

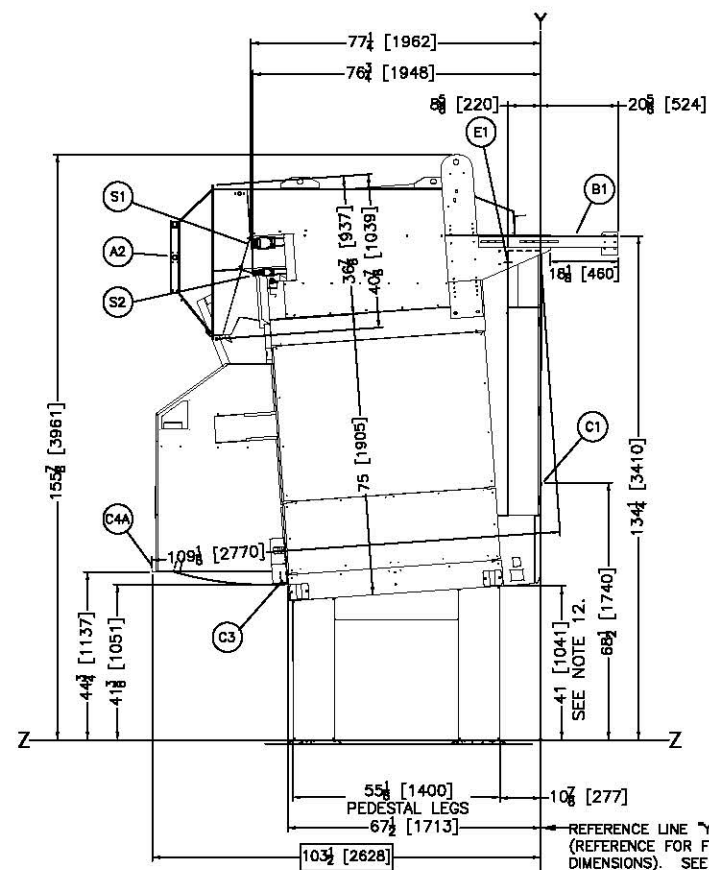


LEFT VIEW


ZERO PEDESTAL SHOWN  
ADJUST ALL VERTICAL DIMENSIONS  
TO THE PEDESTAL SPECIFIED.  
SEE NOTE 12.

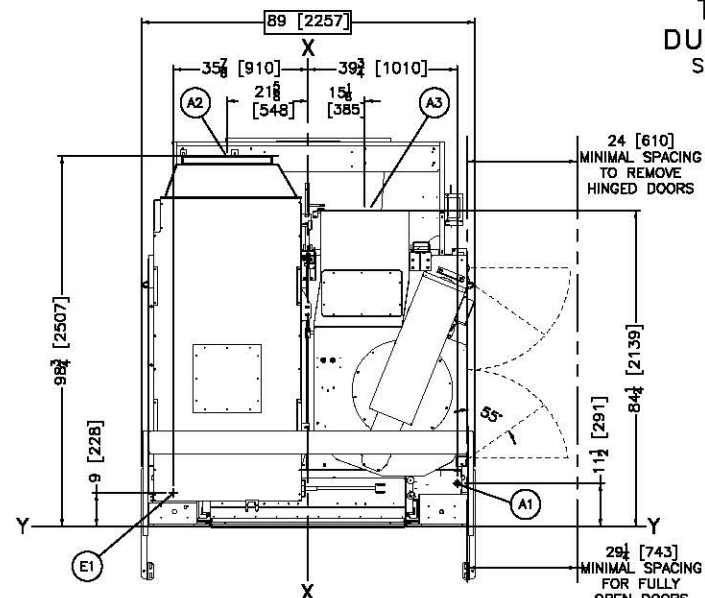


PLAN VIEW

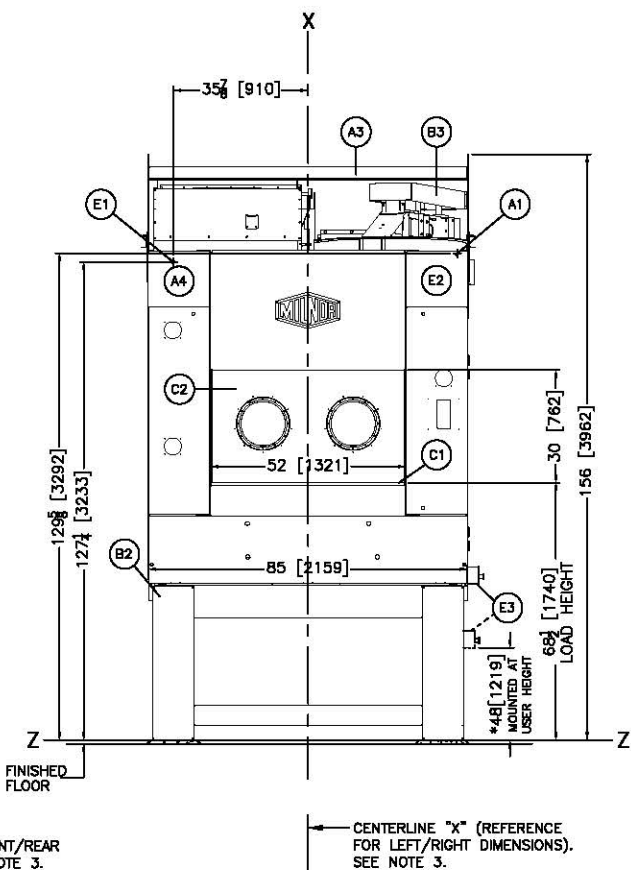


FRONT VIEW

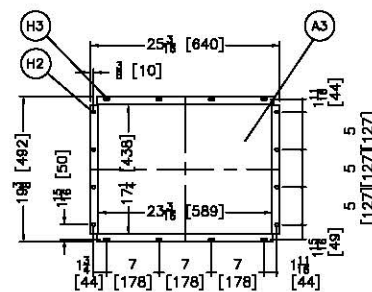


BLOWER EXHAUST  
TO REAR  
DUCT DETAIL  
SEE NOTE 13.

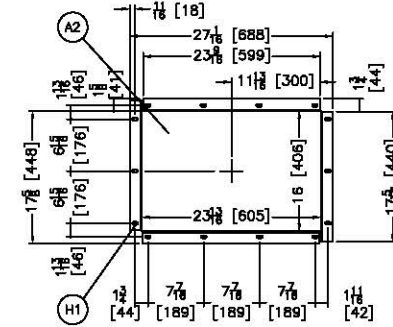


BLOWER INTAKE  
DUCT DETAIL

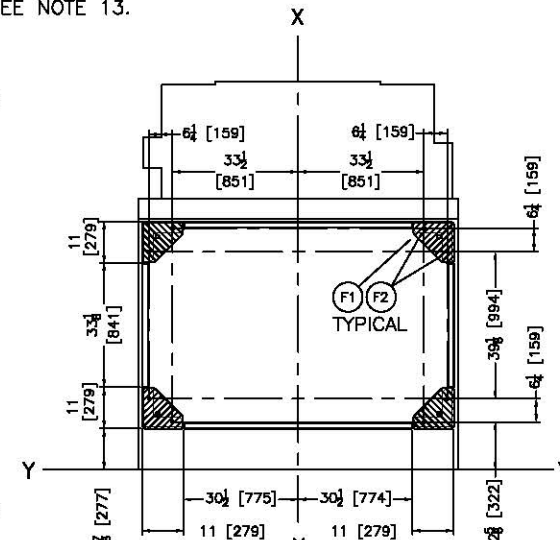

FOUNDATION PLAN

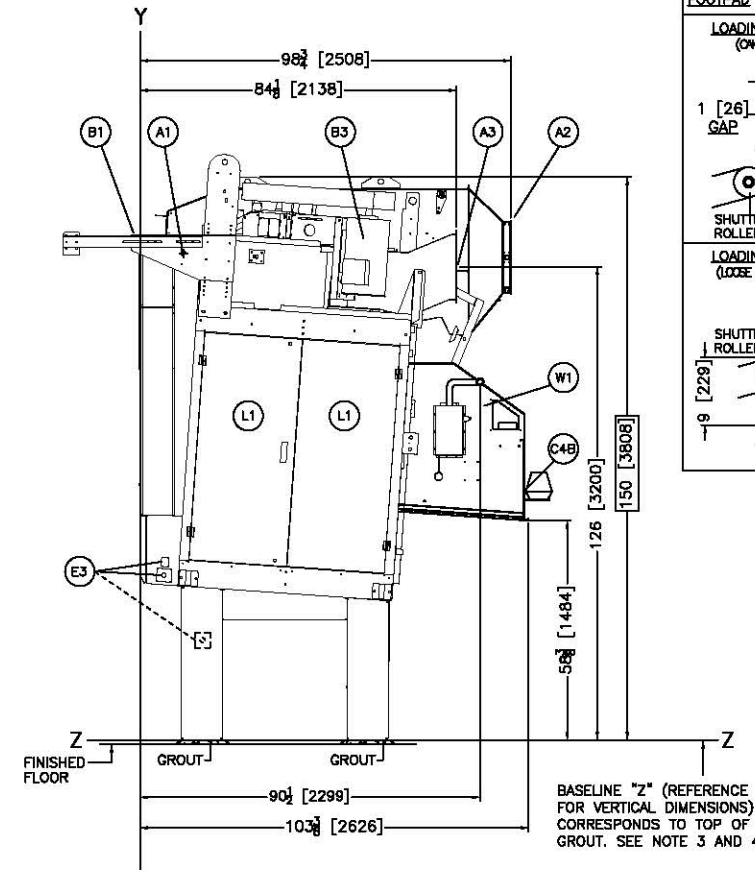

RIGHT VIEW

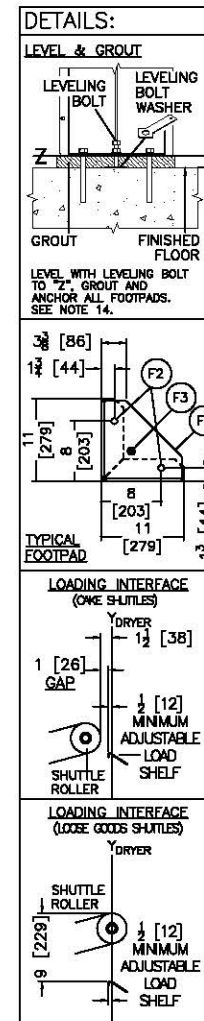

W1	SPRINKLER WATER INLET, 1-1/4" NPT
S2	STEAM CONDENSATE OUT, 1" NPT
S1	STEAM INLET, 2" NPT
L1	REMOVABLE ACCESS DOORS
H3	5/16" [7] DIA. X 3/4" [19] SLOTS, 8 PLACES
H2	5/16" [7] DIA. X 1/2" [13] SLOTS, 8 PLACES
H1	.406" [10] DIA. X 3/4" [19] SLOTS, 14 PLACES
F3	LEVELING BOLT (5/8"-11 X 3") SUPPLIED.
F2	ANCHOR BOLT HOLES, 13/16" [21] DIA., 8 PLACES
F1	DRYER FOOT SUPPORT PLATES, SEE NOTE 14.
E3	EMERGENCY STOP & DOOR OPEN CONTROLS
E2	MICROPROCESSOR BOX
E1	MAIN ELECTRICAL CONNECTION
C4B	OPTIONAL SHORT SHROUD
C4A	DISCHARGE SHROUD
C3	DISCHARGE DOOR
C2	LOAD DOOR, 52" WIDE
C1	LOAD HEIGHT
B3	BLOWER MOTOR
B2	DRYER TO DRYER MOUNTING BRACKET
B1	SHUTTLE RAIL SUPPORT
A4	AIR VALVE BOX
A3	BLOWER EXHAUST REAR, STANDARD, SEE DETAIL.
A2	BLOWER INTAKE, SEE DETAIL.
A1	MAIN AIR CONNECTION 1" NPT
ITEM	LEGEND


- NOTES**
- FOR UTILITY REQUIREMENTS FOR GAS, STEAM, THERMAL OIL, AIR INTAKE, AND WATER SUPPLY, SEE DOCUMENT BIPDUI01/20160505 OR LATER.
  - DRYER FOOT SUPPORT PLATES ARE WELDED TO THE BOTTOM OF PEDESTAL LEGS TO ALLOW A GREATER GROUTING SURFACE BETWEEN PEDESTAL LEGS AND FINISHED FLOOR. USE TO LEVEL THE DRYER TO BASELINE "Z" (COINCIDES WITH BOTTOM OF LEGS.) DRYER FEET MUST BE GROUTED & ANCHORED TO FLOOR.
  - EXHAUST DUCTING: DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND/OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT, ELBOWS AND TRANSITIONS. ELBOWS WILL REQUIRE DOUBLING THE GAUGE.
  - THIS DRAWING SHOWS THE BASSETTS18 DRYER USING A 41" [1041] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL, STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
  - DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
  - MINIMUM CLEARANCE FOR MAINTENANCE = 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSHUTCL00, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
  - DRYER IS DISASSEMBLED INTO THREE COMPONENTS FOR SHIPPING, THE BASE, THE HOUSE, AND THE TOP OF THE BLOWER INTAKE DUCT. CONSULT MILNOR FACTORY IF ADDITIONAL COMPONENTS, SUCH AS BLOWER HOUSING, MUST BE REMOVED TO FIT MACHINE THROUGH OPENING.
  - DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
  - CONTROL PANEL FOR DRYER MAY BE INSTALLED IN ANY CONVENIENT LOCATION. CONTROL CABLE FROM DRYER TO PANEL IS SUPPLIED BY MILNOR AND PRICED SEPARATELY.
  - AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (e.g. BARE CONCRETE, BRICK, ETC.)  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
  - CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
  - BASELINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
  - USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
  - NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
  - ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.


**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.




ZERO PEDESTAL SHOWN  
ADJUST ALL VERTICAL DIMENSIONS  
TO THE PEDESTAL SPECIFIED.  
SEE NOTE 8.

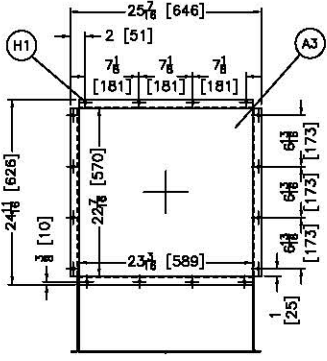


BLOWER EXHAUST  
DUCT UP OPTION

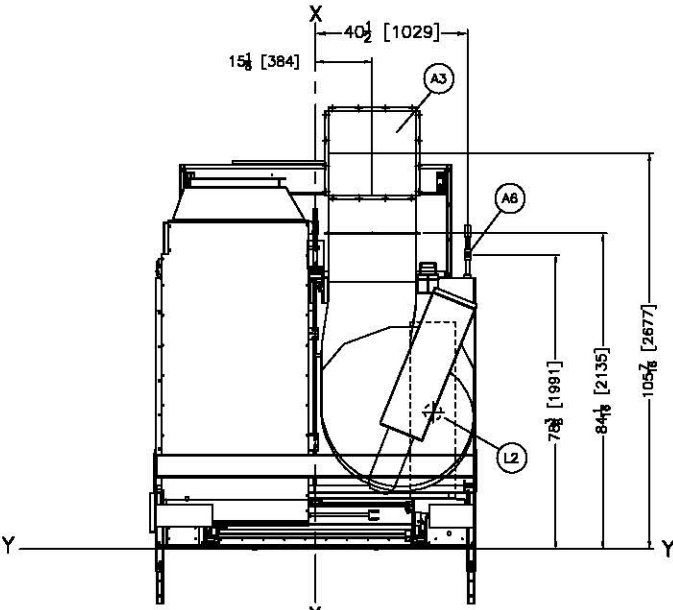

PLAN VIEW

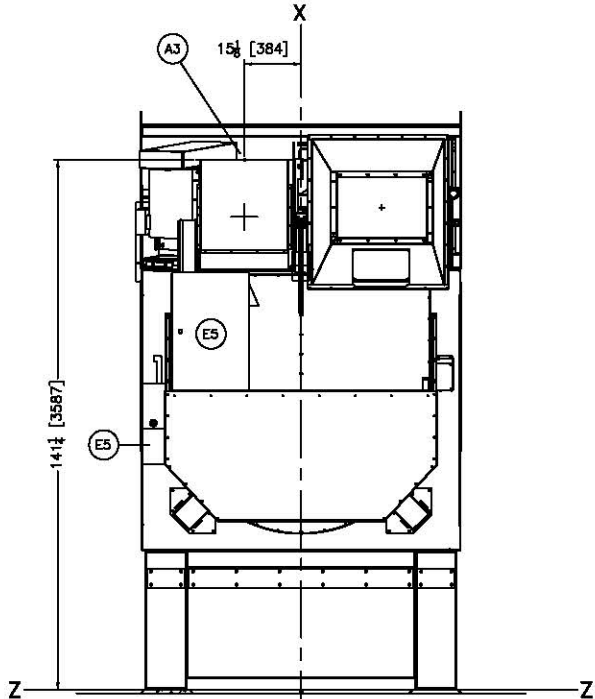


REAR VIEW

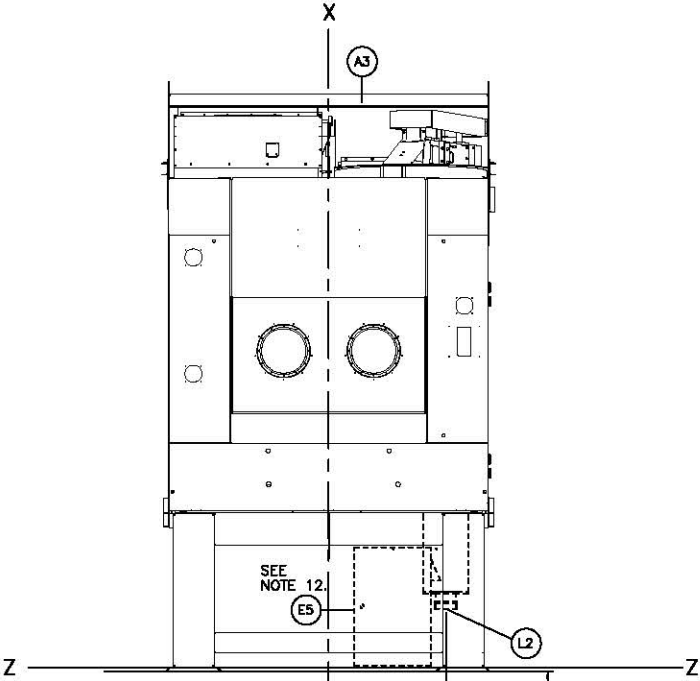

CENTERLINE "X" (REFERENCE  
FOR LEFT/RIGHT DIMENSIONS).  
SEE NOTE 3.

FRONT VIEW

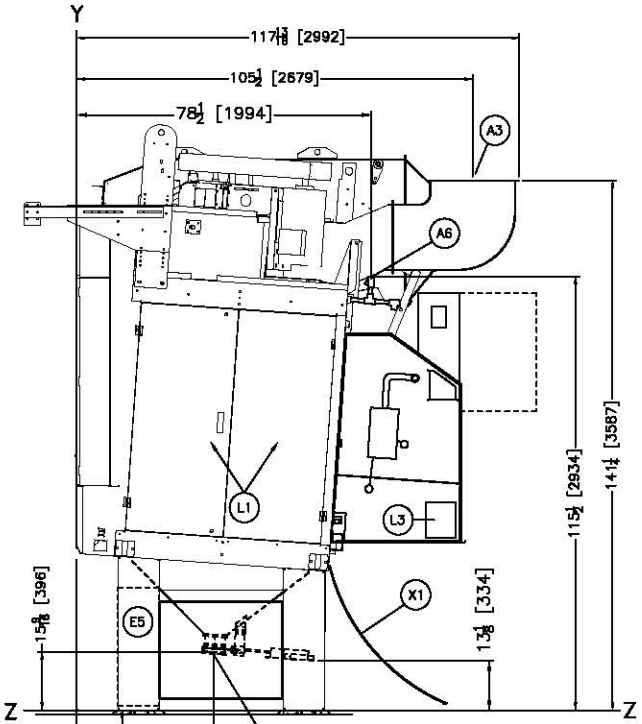

RIGHT VIEW

X1	OPTIONAL UNLOAD BRIDGE, 48" PLASTIC SHEETING
L3	INTERNAL LINT SCREENS AIR VALVE BOX.
L2	LINT OUTLET (6" FLEX HOSE CONNECTION) FOR OPTIONAL
	INTERNAL LINT SCREEN. PIPES TO DRYVAC01, DRYVAC02 OR
	LINT COLLECTOR BY OTHERS. SEE NOTES 9 & 10 AND
	DRAWING BD6458DLCPBE FOR RECOMMENDED PIPING.
L1	OPTIONAL INTERNAL LINT SCREENS, BEHIND PANELS
H1	BOLT SLOTS, 5/16" [7] DIA.
E5	OPTIONAL INVERTER BOX IS LOCATED AS SPECIFIED ON THE
	DISCHARGE SHROUD, PEDESTAL FRONT, OR FOR REMOTE
	MOUNTING.
A6	1" NPT AIR CONNECTION/OPTIONAL INTERNAL LINT SCREENS
A3	BLOWER EXHAUST DUCTING UP OPTION, SEE DETAIL.
ITEM	LEGEND

- NOTES
- 14 FOR UTILITY REQUIREMENTS FOR GAS, STEAM, THERMAL OIL, AIR INTAKE, AND WATER SUPPLY, SEE DOCUMENT BIPDUI01/20160605 OR LATER.
- 13 A WATER SEPARATOR (NOT SUPPLIED BY PMC) IS REQUIRED FOR THE INCOMING AIR TO THE INTERNAL LINT SYSTEM.
- 12 OPTIONAL INVERTER BOX MAY BE SPECIFIED FOR PEDESTAL MOUNT ON 48" [1219] (ZERO PEDESTAL PLUS 7" [178]) AND TALLER PEDESTALS ONLY.
- 11 OPTIONAL INTERNAL LINT SCREENS IS AVAILABLE FOR DRYERS WITH 41" [1041] AND TALLER PEDESTALS ONLY.
- 10 FOR OPTIONAL INTERNAL LINT SCREENS, IT IS RECOMMENDED TO HAVE A 60 GALLON COMPRESSED AIR BOOSTER TANK FOR EVERY 5 DRYERS.
- 9 EXHAUST DUCTING: DRYER OPERATES UP TO 8500 SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
- 8 THIS DRAWING SHOWS THE 6458TS1R DRYER USING A 41" [1041] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
- 7 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
- 6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.).  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
- 5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
- 4 BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
- 3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
- 2 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
- 1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

ATTENTION  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.


ATTENTION  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

6458TS1R OPTIONS


DM 0 0.5M 1M  
INCHES 0 12 24 36

BD6458TS1REB  
2016236D


P.O. Box 400 Kenner, LA 70063, USA, Phone 504/487-9591,  
FAX 504/488-3084, Email: milnorinfo@milnor.com

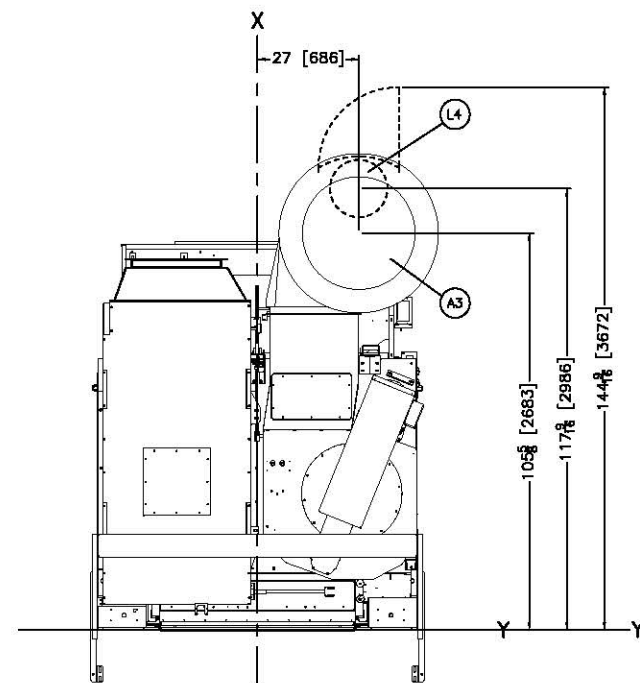


PLAN VIEW  
LINT OUTLET TO BAG COLLECTOR

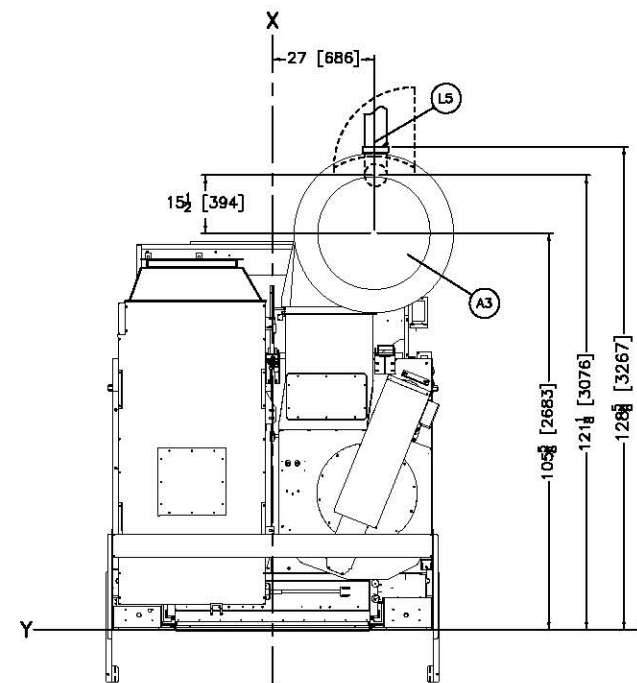


PLAN VIEW  
LINT OUTLET TO VACUUM COLLECTOR

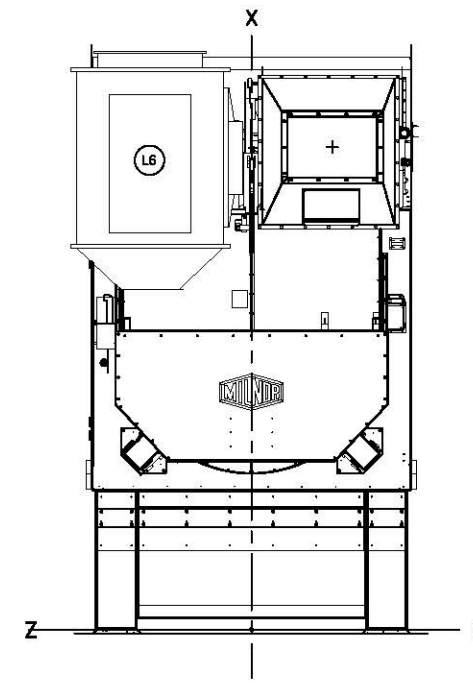


REAR VIEW  
LINT OUTLET TO BAG COLLECTOR

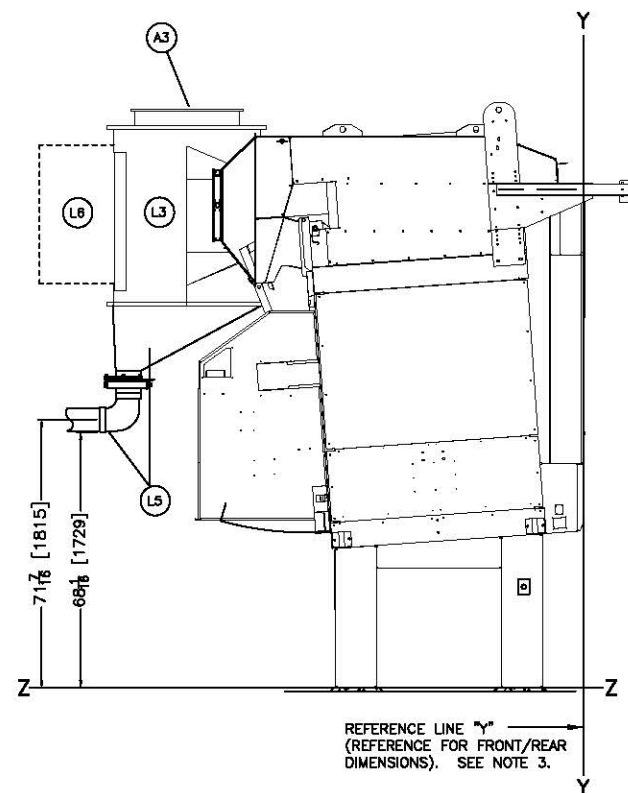


LEFT VIEW

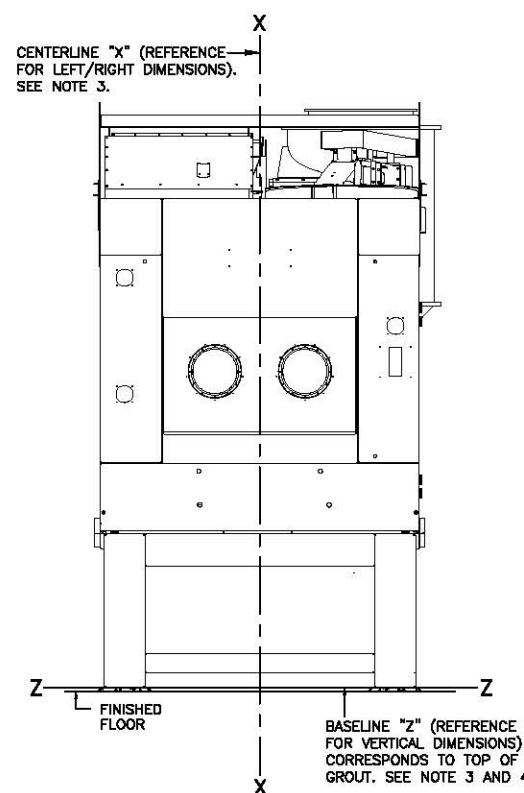

FRONT VIEW

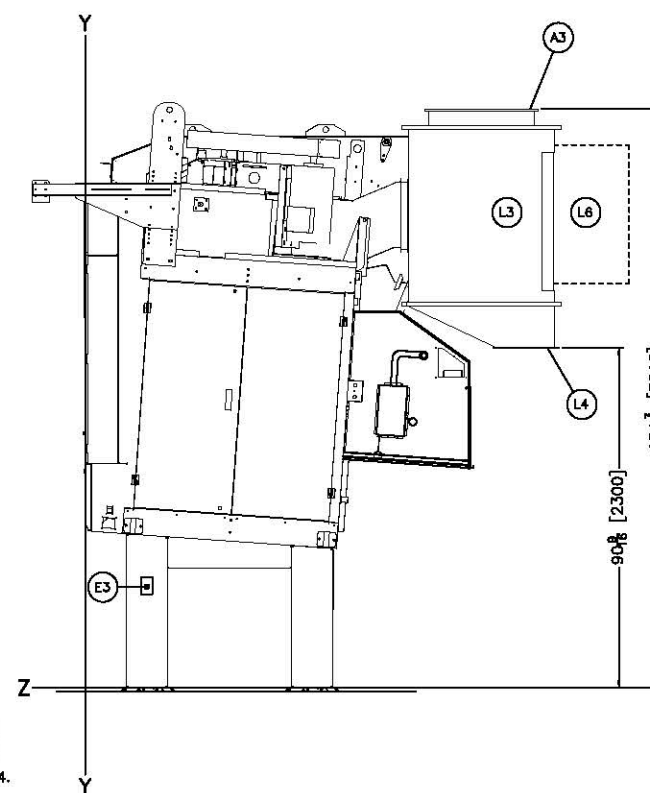

RIGHT VIEW

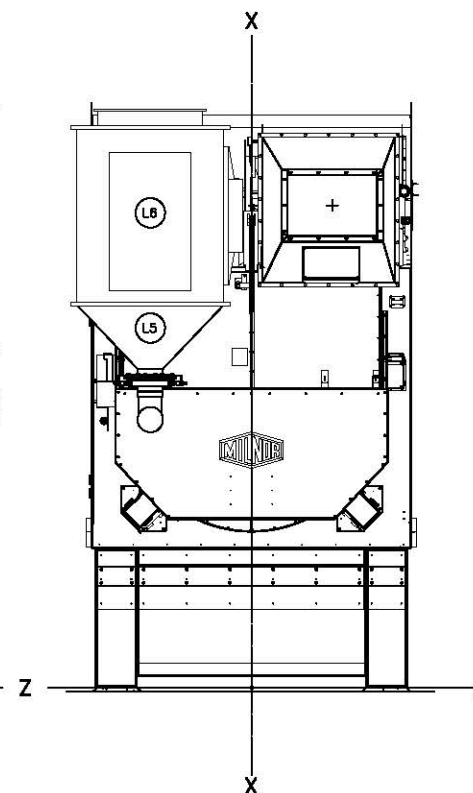

REAR VIEW  
LINT OUTLET TO VACUUM COLLECTOR

L6	HINGED ACCESS DOOR
L5	CONE, LINT COLLECTION OUTLET TO VACUUM COLLECTOR DISCHARGE, 6" PIPE CONNECTION
L4	CONE, LINT COLLECTION OUTLET TO BAG, DISCHARGE 15-1/2" ID FLANGED OUTLET
L3	MLF1010 LINT FILTER (LINT FILTER SUPPORTED BY OTHERS)
A3	EXHAUST DUCT, 28" [711] DIAMETER
ITEM	LEGEND

- NOTES**
- 12 EXHAUST DUCTING: DRYER OPERATES UP TO 8500SCFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THIS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
  - 11 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
  - 10 MINIMUM CLEARANCE FOR MAINTENANCE - 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BD6458TS1R, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
  - 9 DRYER IS DISASSEMBLED INTO THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE RECIRCULATION DUCTING. CONSULT MILNOR FACTORY IF COMPONENTS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.
  - 8 DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
  - 7 THIS DRAWING SHOWS THE 6458L DRYERS USING A 41T [1041] PEDESTAL BASE. WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
  - 6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (e.g. BARE CONCRETE, BRICK, ETC.).  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
  - 5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
  - 4 BASELINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
  - 3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
  - 2 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
  - 1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.



**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.


6458TS1R + MLF1010

DM 0 0.5M 1M DWG# BD6458TS1REC 2016236D  
INCHES 0 12 24 36


**MILNOR PELLERIN MILNOR CORPORATION**  
P.O. Box 400 Kenner, LA 70063, USA, Phone 504/487-8581, FAX 504/488-3084, Email: milnorinfo@milnor.com

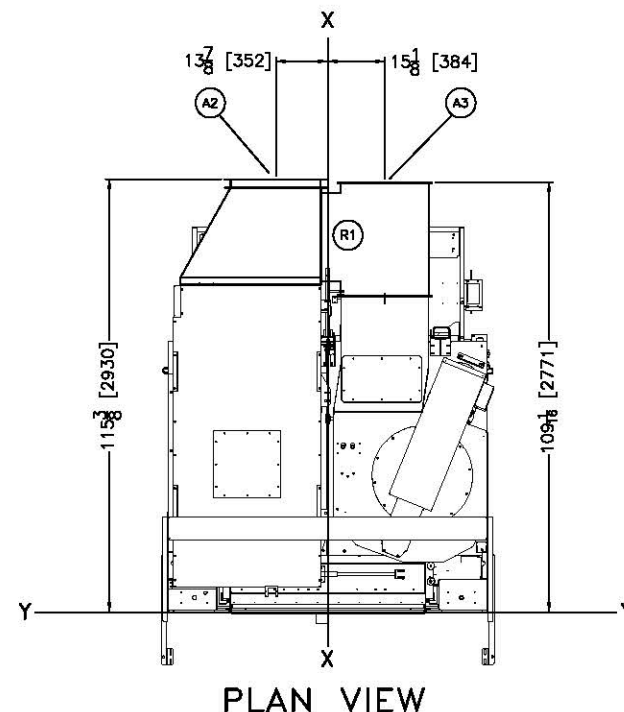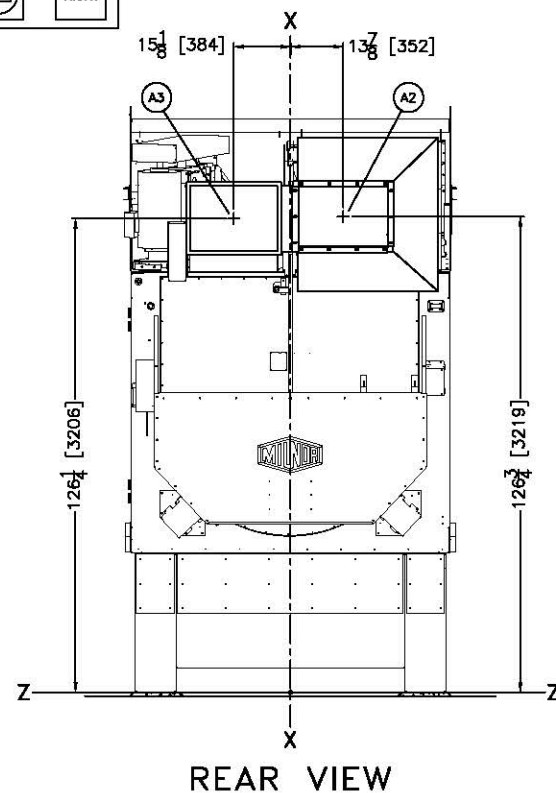

THIS DRAWING IS FOR THE  
RECIRCULATION DUCTING OPTION.  
USE THIS DRAWING WITH  
BD6458TS1LFE.



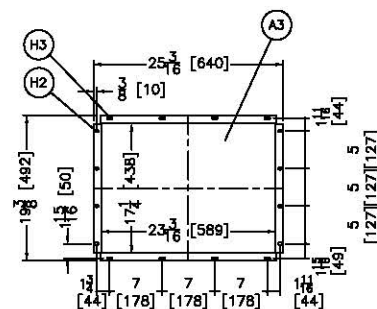


RECIRCULATION  
BLOWER EXHAUST  
DUCT TO REAR  
DETAIL

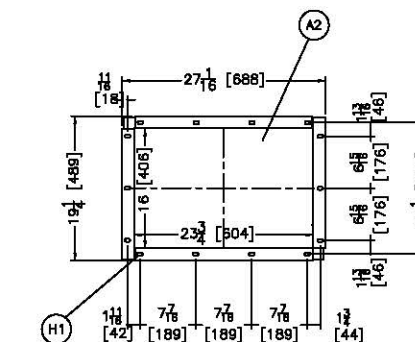

### RECIRCULATION BLOWER INTAKE DUCT DETAIL

R1	RECIRCULATION DUCTING
H3	5/16" [7] DIA. X 3/4" [19] SLOTS, 8 PLACES
H2	5/16" [7] DIA. X 1/2" [13] SLOTS, 8 PLACES
H1	3/8" [9] DIA. X 3/4" [19] SLOTS, 14 PLACES
A3	RECIRCULATION DUCTING BLOWER EXHAUST REAR, SEE DETAIL
A2	RECIRCULATION DUCTING BLOWER INLET, SEE DETAIL.
ITEM	LEGEND

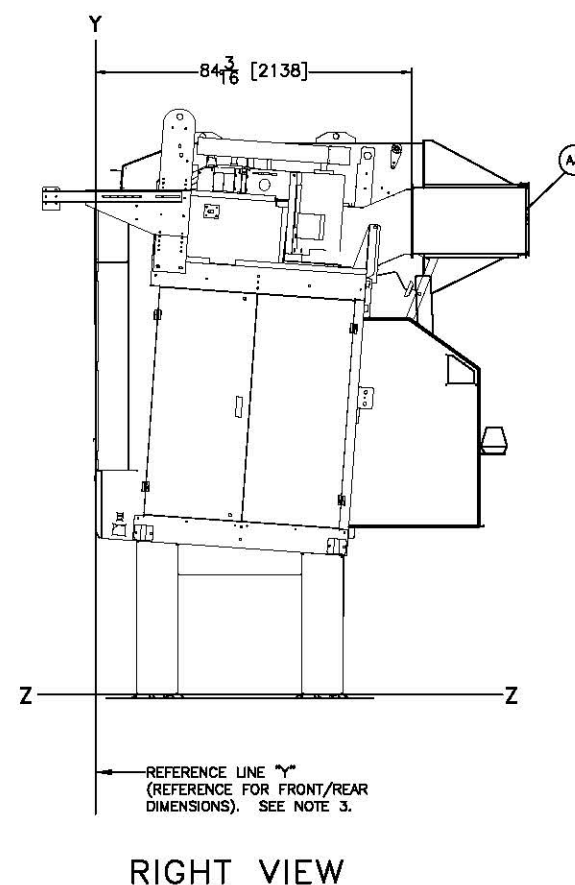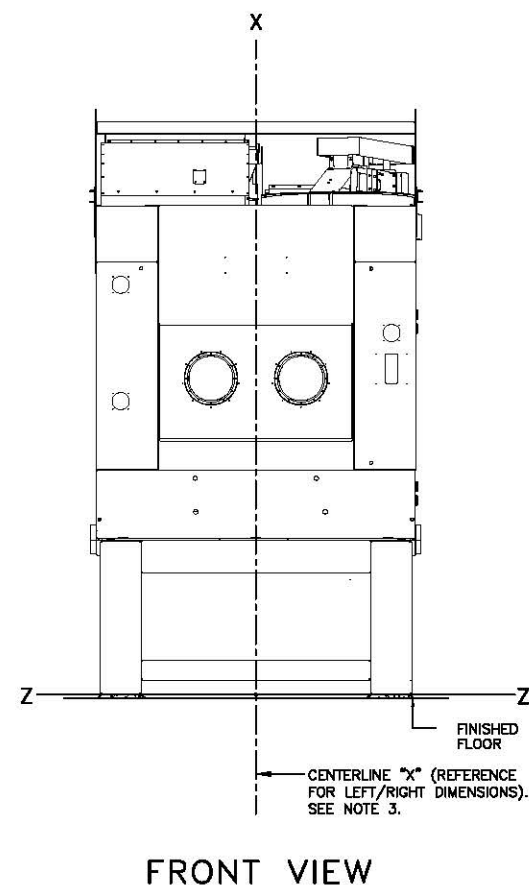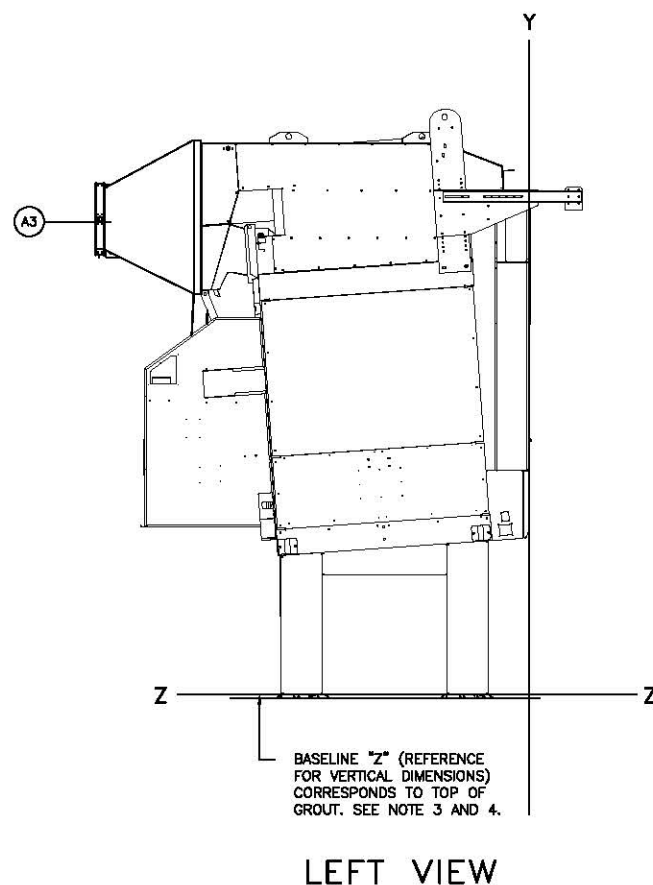

- ## NOTES
- 12 EXHAUST DUCTING: DRYER OPERATES UP TO 80050CFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING. THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPIRAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, MATERIAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE OR STIFFENERS MAY BE REQUIRED TO GET THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
  - 11 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY FLUT WITH LINT.
  - 10 MINIMUM CLEARANCE FOR MAINTENANCE = 18" [458] SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSHTCLRBE, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
  - 9 DRYER IS DISASSEMBLED INTO THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE REGICIRCULATION DUCTING. CONSULT MILNOR FACTORY IF COMPONENTS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.
  - 8 DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
  - 7 THIS DRAWING SHOWS THE 64088T61 DRYER USING A 41" [1041] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL. SLOWDOWN HEIGHT FOR CONVEYOR DISCHARGE, PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
  - 6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.)  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
  - 5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
  - 4 BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
  - 3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
  - 2 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
  - 1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS ETC. DO NOT USE FOR CONSTRUCTION. IDENTIFY ALL CERTIFIED PIPE CLOSERS TO BE USED. THE FIVE FEET FROM MACHINE FACTORY MUST BE PROVIDED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.
- ## ATTENTION
- MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.
- ## ATTENTION
- THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

6458TS1R RECIRC-BLOWER LEFT



DWG#	BD6458TS1RED 2016236D
------	--------------------------



**PELLERIN MILNOR CORPORATION**  
P.O. Box 400 Kenner, LA 70063, USA, Phone 504/487-8581,  
FAX 504/488-3094. Email: [milnorinfo@milnor.com](mailto:milnorinfo@milnor.com)

**PLAN VIEW**  
LINT OUTLET TO BAG COLLECTOR

**PLAN VIEW**

LINT OUTLET TO VACUUM COLLECTOR

R1	RECIRCULATION DUCT
L6	HINGED ACCESS DOOR
L5	CONE, LINT COLLECTION OUTLET TO VACUUM COLLECTOR DISCHARGE, 6" PIPE CONNECTION
L4	CONE, LINT COLLECTION OUTLET TO BAG, DISCHARGE 15-1/2" ID FLANGED OUTLET
L3	MLF1010 LINT FILTER (SUPPORTED BY OTHERS)
H1	3/8" [10] DIAMETER X .3/4" SLOTS, 14 PLACES
A3	BLOWER EXHAUST, 28" [711] DIAMETER
A2	BLOWER INTAKE
ITEM	LEGEND

## NOTES

12 EXHAUST DUCTING: DRYER OPERATES UP TO 8500CFM WITH PRESSURE CHANGES OF UP TO 4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING THUS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL SPARKS WHEN IT IS QUARANTEED. IF QUARANTEED, A MINERAL THICKNESS MUST BE CONSIDERED TO PREVENT OIL CANNING AND VIBRATION. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND OR STIFFENERS MAY BE REQUIRED TO AVOID THE SIZE AND LENGTH OF THE DUCT, ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.

11 DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.

10 MINIMUM CLEARANCE FOR MAINTENANCE = 18" [458]. SOME JURISDICTIONS REQUIRE UP TO 30" [762] CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWING, BOSHTCLRE, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.

9 DRYER IS DISASSEMBLED INTO THREE MAJOR COMPONENTS FOR SHIPPING, THE BASE, THE FRAME & THE RECIRCULATION DUCTING. CONSULT MILNOR FACTORY IF COMPONENTS SUCH AS BLOWER HOUSING MUST BE REMOVED TO FIT THE MACHINE THROUGH AN OPENING.

8 DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.

7 THIS DRAWING SHOWS THE 6458L DRYERS USING A 41" [1041] PEDESTAL BASE. WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.

6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:

36	[914]	IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.
42	[1067]	IF OBJECT IS A GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.)
48	[1219]	IF OBJECT IS ANY LIVE PART.

CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.

5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.

4. BASELINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE PADS, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE PAD. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND ANY INTERFACING MACHINES REQUIRING GROUT ARE SET ON A MINIMUM 1/2 IN. THICK GROUT BED.

3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.

2 NUMBERS IN BRACKETS □ DENOTE DIMENSIONS IN MILLIMETERS.

1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.


**ATTENTION**

MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

## ATTENTION




THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

6458TS1R + RECIRC + MLF1010



**MILNER PELLERIN MILNOR CORPORATION**  
P.O. Box 400 Kenner, LA 70063, USA, Phone 504/467-8591,  
FAX 504/468-3084, Email: milnerinfo@milnor.com



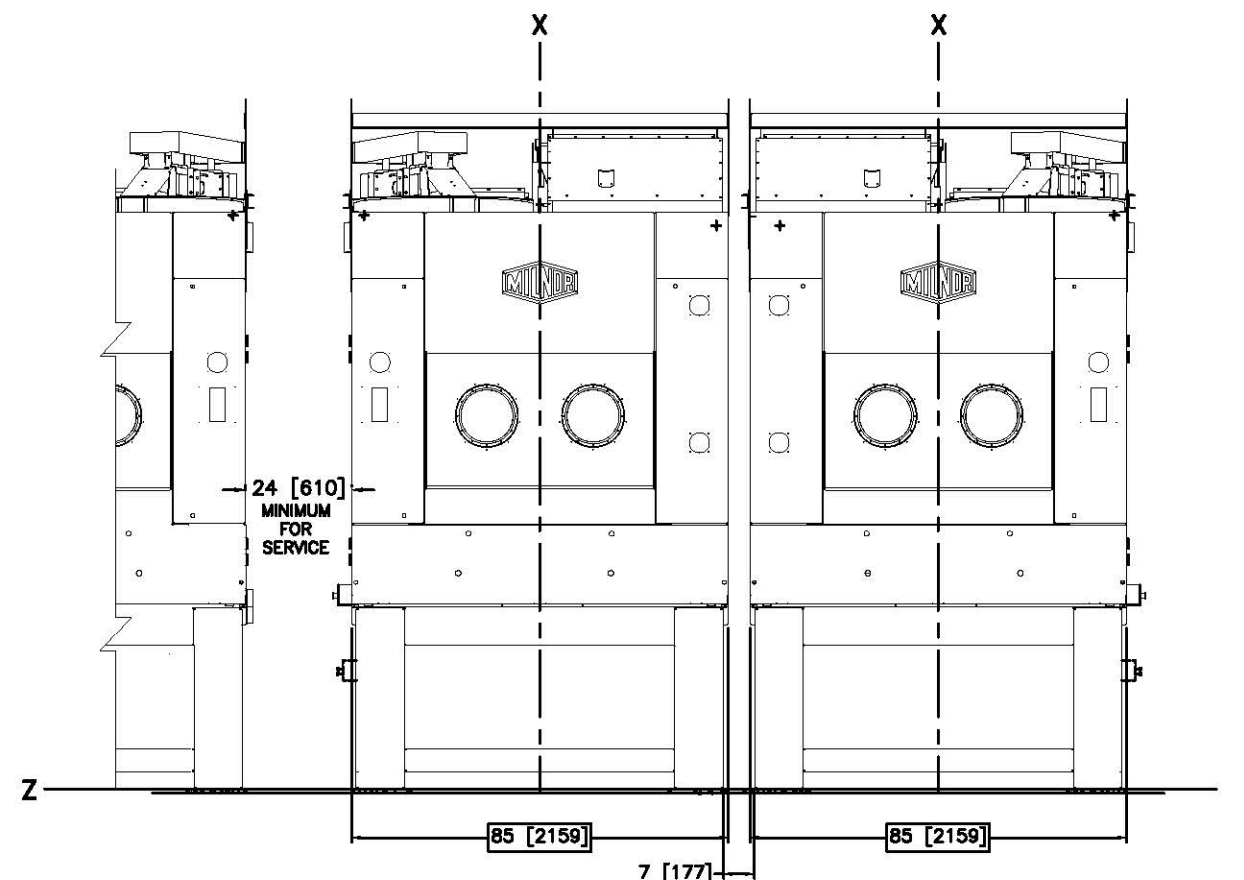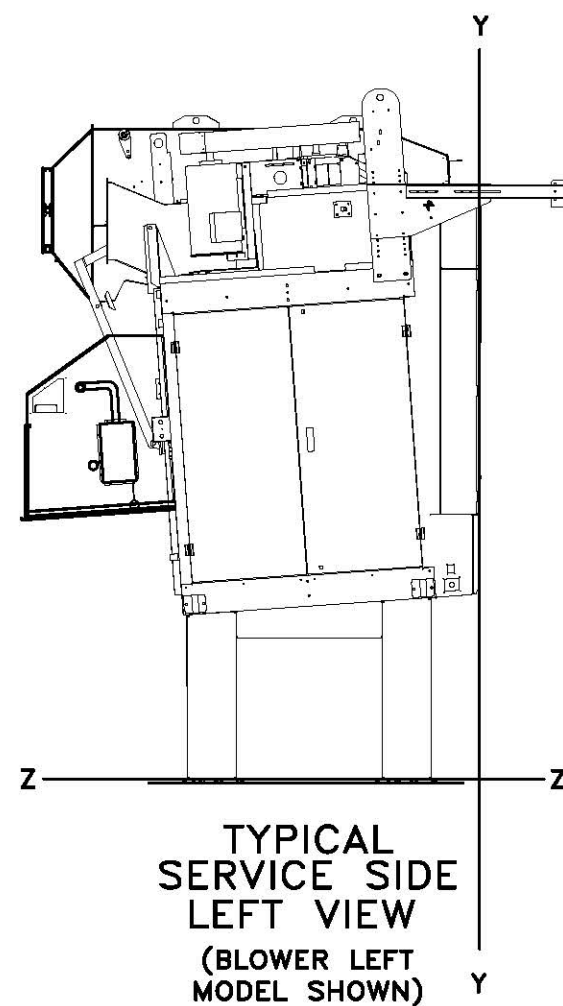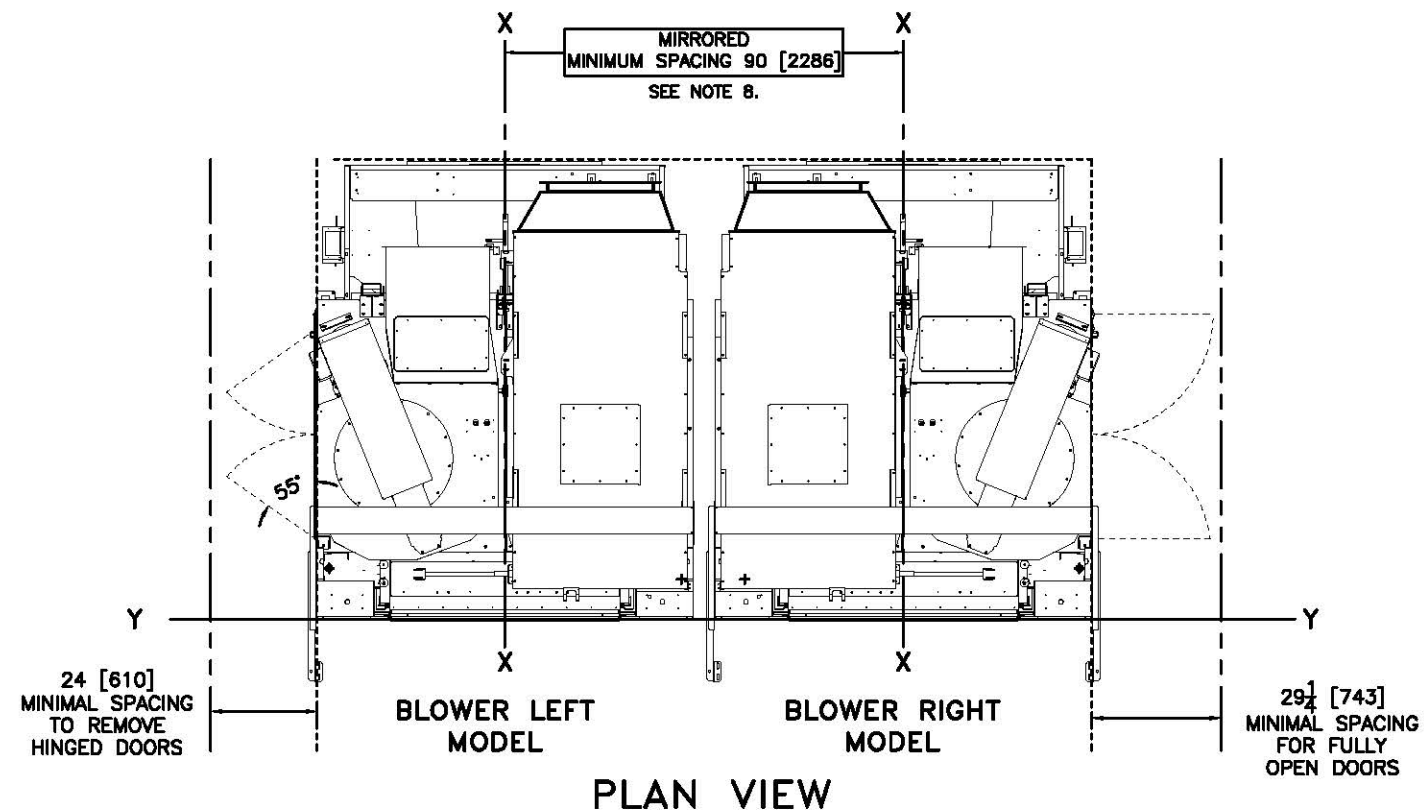

#### NOTES

- THE DRYERS' STEAM COIL PIPING DOES NOT ALLOW THE STEAM DRYERS TO USE THE "PAIRED" OPTION. EACH DRYER IS ORDERED AS A STANDALONE DRYER WHICH INCLUDES SIDE PLATE PANELS ON NON-SERVICE SIDE.
- THIS DRAWING SHOWS THE 64058TS1 DRYER USING A 4" [104] PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
- AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS:  
36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL.  
42 [1067] IF OBJECT IS A GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.)  
48 [1219] IF OBJECT IS ANY LIVE PART.  
CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
- CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
- BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
- USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
- NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
- ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.



#### ATTENTION

MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT. ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS, FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT MANUFACTURER OR VENDOR.

#### ATTENTION

THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

64058 TS1L,TS1R MINIMUM SPACING





UNION  
BD6458TS1PEE  
2024443D

**MILNOR** PELLERIN MILNOR CORPORATION  
P.O. Box 400 Harvey, LA 70063, USA, Phone 504/447-8991,  
FAX 504/446-3004, Email: milnorinfo@milnor.com


### BLOWER INTAKE DUCT DETAIL

**BLOWER EXHAUST  
TO REAR  
DUCT DETAIL**  
X SEE NOTE 13.

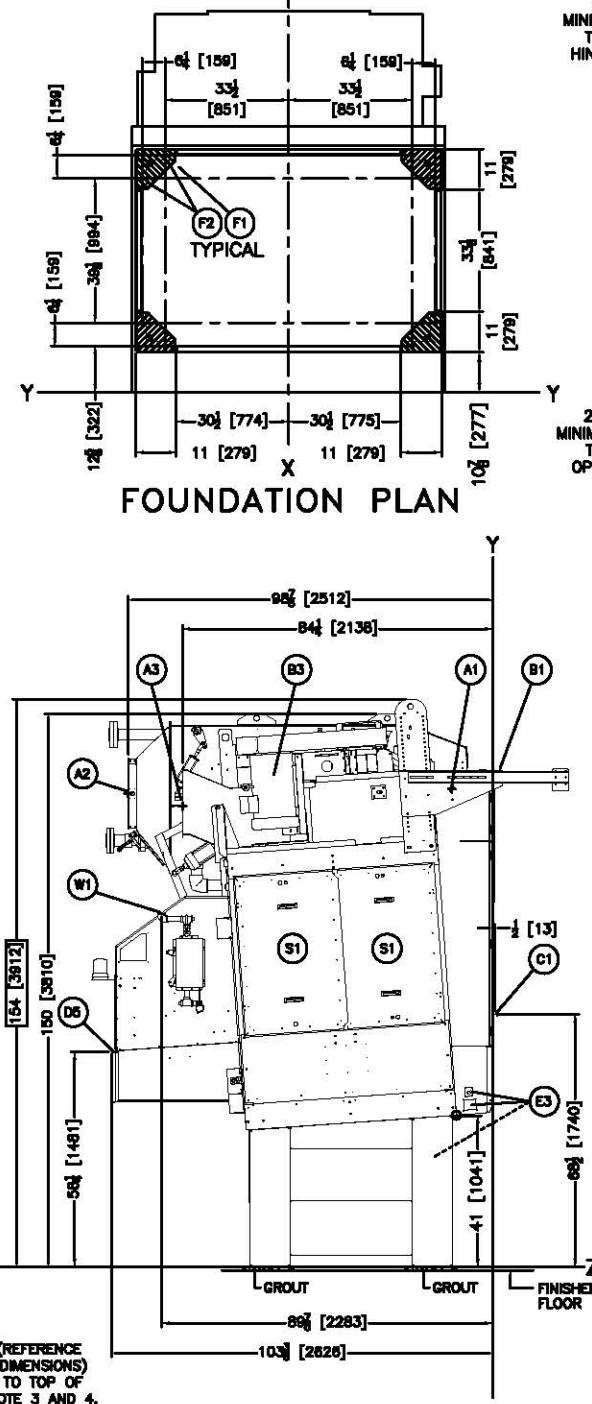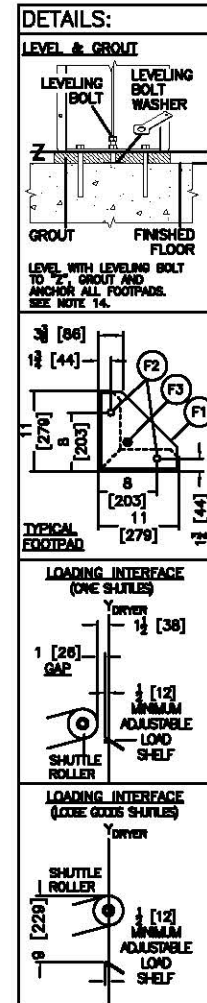


LEFT VIEW


<p>HOT OIL DRYERS CANNOT BE INSTALLED PAIRED</p>
<p>ZERO PEDESTAL SHOWN ADJUST ALL VERTICAL DIMENSIONS TO THE PEDESTAL SPECIFIED. SEE NOTE 12.</p>

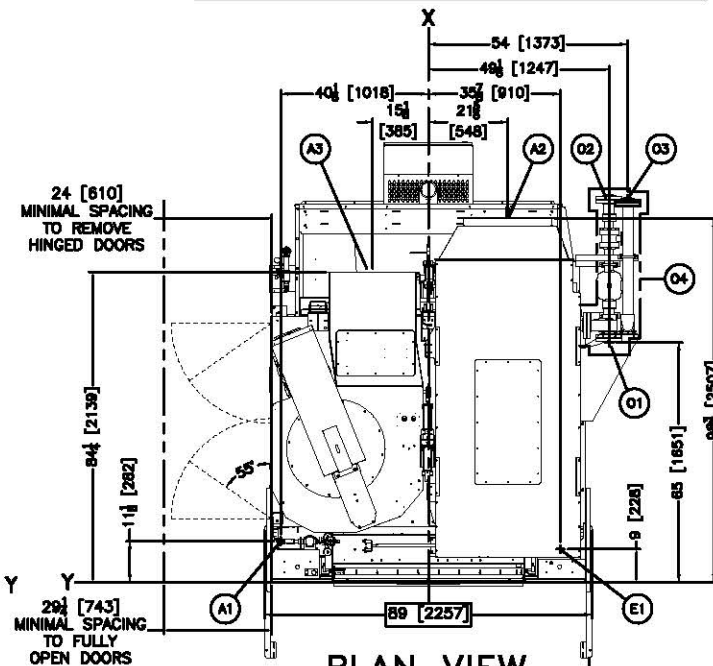


### PLAN VIEW

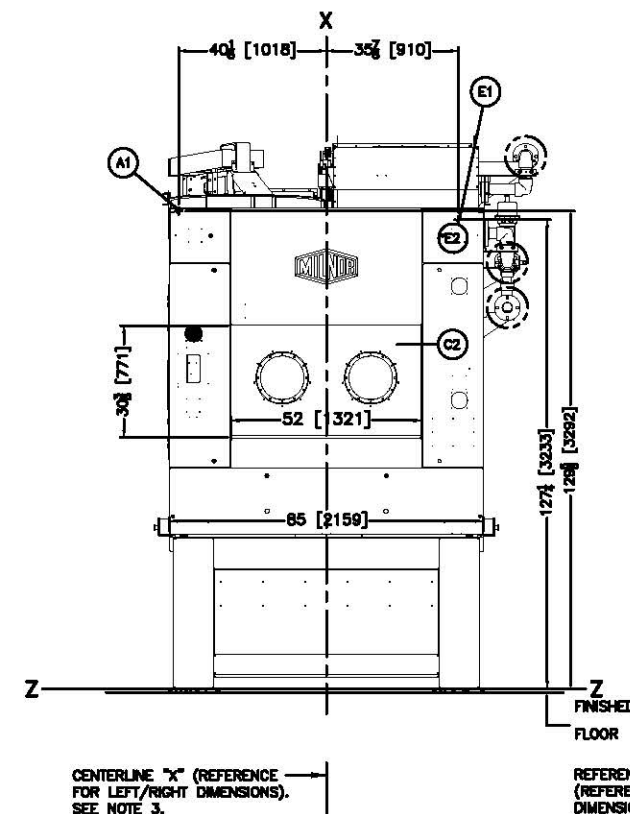

**FRONT VIEW**

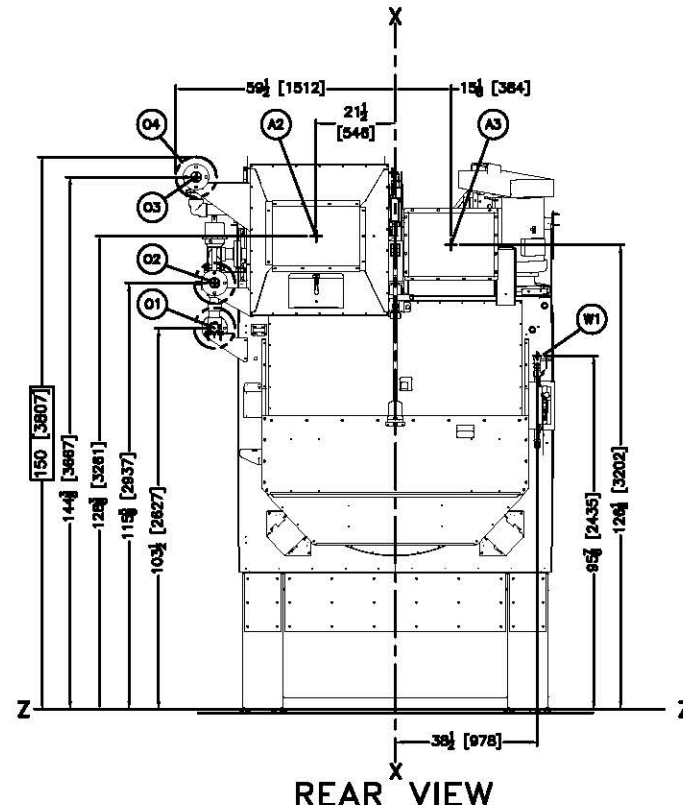

REAR VIEW

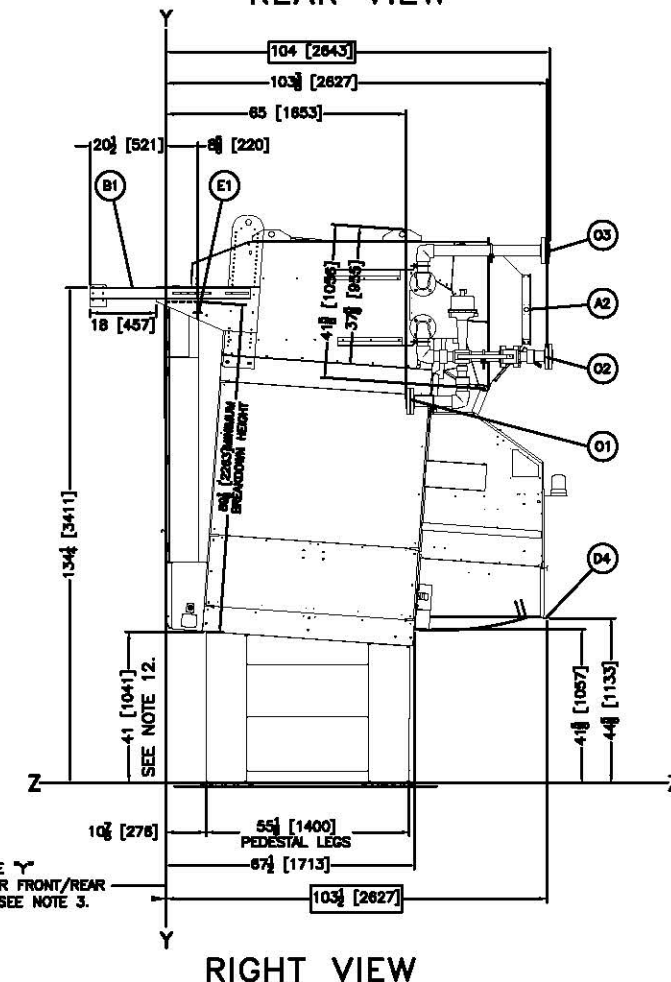

**RIGHT VIEW**

W1	SPRINKLER WATER INLET , 1-1/4" NPT
S1	REMOVABLE ACCESS DOORS
O4	HOT OIL, 2" THICK PIPE INSULATION COVERS, PROVIDED
O3	HOT OIL OUTLET, 2 1/2" 150# FLANGED CONNECTION
O2	HOT OIL BYPASS, 2 1/2" 150# FLANGED CONNECTION
H1	HOT OIL INLET, 2 1/2" 150# FLANGED CONNECTION
H3	5/16" DIA. X 3/4" SLOTS, 8 PLACES
H2	5/16" DIA. X 1/2" SLOTS, 8 PLACES
H1	.406" DIA. X 3/4" SLOTS, 14 PLACES
F3	LEVELING BOLT (5/8"-11 X 3") SUPPLIED.
F2	DRYER FOOT SUPPORT PLATES, SEE NOTE 14.
F1	ANCHOR BOLT HOLES, 13/16" DIA, 8 PLACES
E4	REMOTE MULTITRAC DISPLAY -- NON STANDARD
E3	EMERGENCY STOP LOCATIONS
E2	MICROPROCESSOR BOX
E1	MAIN ELECTRICAL CONNECTION
D5	OPTIONAL SHORT SHROUD
D4	STANDARD SHROUD
D3	DISCHARGE DOOR
D2	LOAD DOOR, 52" WIDE
D1	LOAD HEIGHT
B3	BLOWER MOTOR
B1	SHUTTLE RAIL SUPPORT
A4	AIR VALVE BOX
A3	BLOWER EXHAUST REAR, STANDARD, SEE DETAIL.
A2	BLOWER INTAKE, SEE DETAIL
A1	MAIN AIR CONNECTION 1"NPT
ITEM	LEGEND

NOTES	
15	FOR UTILITY REQUIREMENTS FOR GAS, STEAM, THERMAL OIL, AIR INTAKE, AND WATER SUPPLY, SEE DOCUMENT BFD4001/20180506 OR LATER.
14	DRYER FOOT SUPPORT PLATES ARE WELDED TO THE BOTTOM OF PEDESTAL LEGS TO ALLOW GREATER CLEARANCE BETWEEN PEDESTAL LEGS AND FINISHED FLOOR. USE LEVELING BOLTS TO LEVEL THE DRYER TO BASELINE "Z" (COINCIDES WITH BOTTOM OF LEGS.) DRYER FEET MUST BE GROUTED & ANCHORED TO FLOOR.
13	EXHAUST DUCTING: DRYER OPERATES UP TO 8500CFM WITH PRESSURE CHANGES OF UP TO +4" DURING THE CYCLE. THESE CYCLES ARE NUMEROUS AND VARYING THIS FATIGUE OF THE EXHAUST DUCTING NEEDS TO BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 20 GAUGE GALVANIZED SHEET STEEL, SPINAL DUCT WORKS WELL. IF SQUARE DUCTING IS USED, WATER-RESISTANT GASKETS MUST BE CONSIDERED. FIELD EXPERIENCE HAS SHOWN THAT A MINIMUM THICKNESS OF 16 GAUGE GALVANIZED SHEET STEEL IS REQUIRED. HEAVIER GAUGE AND/OR STIFFENERS MAY BE REQUIRED GIVEN THE SIZE AND LENGTH OF THE DUCT. ELBOWS AND TRANSITIONS LIKELY WILL REQUIRE DOUBLING THE GAUGE.
12	THIS DRAWING SHOWS THE 64811T1 DRYER USING A 41"1041" PEDESTAL BASE, WHICH IS EQUAL TO ZERO PEDESTAL. STANDARD HEIGHT FOR CONVEYOR DISCHARGE. PEDESTALS MAY BE ORDERED TO INCREASE OR DECREASE THE MACHINE HEIGHT. ALL VERTICAL DIMENSIONS MUST BE ADJUSTED FOR THE SPECIFIED PEDESTAL.
11	DO NOT USE ANY TYPE OF TURNING VANE IN THE DRYER EXHAUST DUCTING AS THESE WILL IMMEDIATELY PLUG WITH LINT.
10	MINIMUM CLEARANCE FOR MAINTENANCE = 18" (430). SOME JURISDICTIONS REQUIRE UP TO 30" (762) CLEARANCE. CONSULT LOCAL CODES. IN SHUTTLE INSTALLATIONS, MINIMUM DISTANCES FROM DRYER TO WALL IS DETERMINED BY SHUTTLE REQUIREMENTS. SEE DRAWINGS, BOSHUTCLURE, FOR MINIMUM DIMENSION OF SHUTTLE AT LAST STOPPING PLACE (MAY BE DRYER) TO WALL.
9	DRYER IS DISASSEMBLED INTO THREE COMPONENTS FOR SHIPPING: THE BASE, THE HOUSE, AND THE TOP OF THE BLOWER INTAKE DUCT. CONSULT MINOR FACTORY IF ADDITIONAL COMPONENTS SUCH AS BLOWER HOUSING, MUST BE REMOVED TO FIT MACHINE THROUGH OPENING.
8	DO NOT RUN PIPING OR CONDUIT OVER BLOWER HOUSING, SO THAT THE BLOWER MAY BE REMOVED FOR SERVICING, IF NEEDED.
7	CONTROL PANEL FOR DRYER MAY BE INSTALLED IN ANY CONVENIENT LOCATION. CONTROL CABLE FROM DRYER TO PANEL IS SUPPLIED BY MILNOR AND PRICED SEPARATELY.
6	AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS: 12 (14) IF OBJECT IS AN UNGROUNDED (INSULATED) WALL. 42 (104) IF OBJECT IS GROUNDED WALL (i.e. BARE CONCRETE, BRICK, ETC.) 48 (1216) IF OBJECT IS ANY LIVE PART. CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
5	CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
4	BASELINE "Z" IS THE REFERENCE FOR ALL VERTICAL DIMENSIONS. ON MACHINES WITH FIXED BASE RAIL, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BASE RAIL. ON MACHINES WITH ADJUSTABLE FEET, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE FEET WHEN ADJUSTED SO THAT THE MACHINE IS AT ITS MINIMUM ACCEPTABLE HEIGHT. ON TRAVELING SHUTTLES, BASELINE "Z" CORRESPONDS TO THE BOTTOM OF THE BOTTOM RAIL. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR WILL VARY AS REQUIRED TO ENSURE BASELINE "Z" IS HORIZONTAL AND INTERFERING MACHINES REQUIRING GROUND ARE SET ON A MINIMUM 1" (25.4) THICK GROUT BED.
3	USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
2	NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
1	ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE INCLUDING THE GOODS, THE WATER, AND ANY RELATED UNUSUAL (ROTATING) FORCES GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.


6458TT1L





ADDITIONAL AIR REQUIREMENTS  
FOR (L1)– OPTIONAL  
INTERNAL LINT FILTERS  
(SEE NOTE 7.)

AIR PRESSURE REQUIREMENTS: 85–110 PSI  
CONNECTION (A2): 1" NPT  
AIR USAGE (ESTIMATED):  
110 SCF IN 15 SECONDS WHEN ACTIVATED

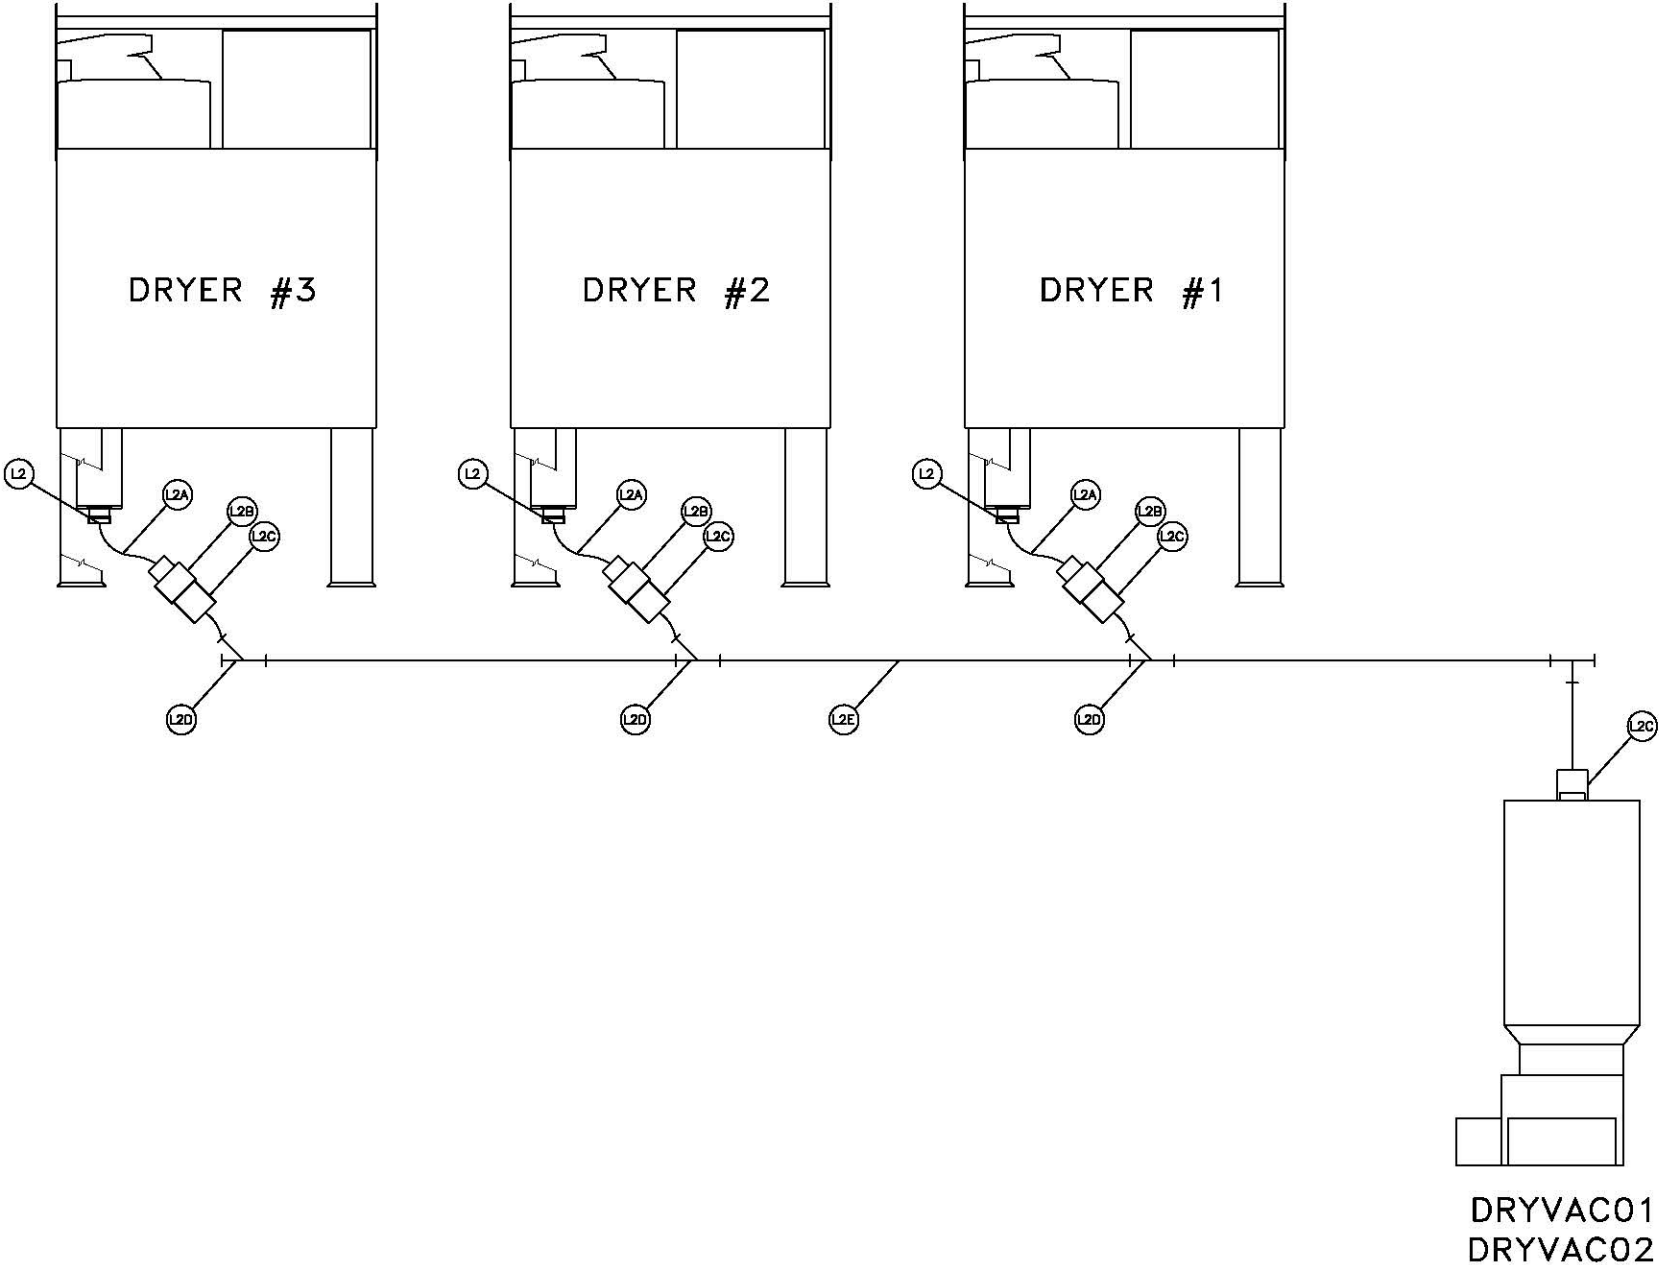

L2E	6" SHC40 PVC (NOT SUPPLIED PMC.)
L2D	6" Y – PVC (NOT SUPPLIED PMC.)
L2C	6" NO HUB CONNECTOR (NOT SUPPLIED PMC.)
L2B	REDUCER 6" X 6", (PART W7-71865, SUPPLIED PMC)
L2A	6" FLEX HOSE (NOT SUPPLIED PMC.)
L2	LINT OUTLET (6" FLEX HOSE CONNECTION) FOR OPTIONAL INTERNAL LINT SCREEN. PIPES TO DRYVAC01, DRYVAC02 OR LINT COLLECTOR BY OTHERS.

ITEM	LEGEND
------	--------

NOTES
8 SEE DRYER OPTION PAGES FOR ADDITIONAL DIMENSIONAL INFORMATION FOR OPTIONAL INTERNAL LINT SCREENS.
7 FOR OPTIONAL INTERNAL LINT FILTERS, IT IS RECOMMENDED TO HAVE A 60 GALLON COMPRESSED AIR BOOSTER TANK FOR EVERY 5 DRYERS.
6 AS OF THIS WRITING, THE MINIMUM CLEARANCE REQUIRED BY U.S. NATIONAL ELECTRIC CODES, FROM ELECTRIC BOX TO ANY OBJECT IS: 36 [914] IF OBJECT IS AN UNGROUNDED (INSULATED) WALL. 42 [1067] IF OBJECT IS A GROUNDED WALL (e.g. BARE CONCRETE, BRICK, ETC.) 48 [1219] IF OBJECT IS ANY LIVE PART. CHECK LOCAL ELECTRIC CODES FOR FURTHER RESTRICTIONS.
5 CUSTOMER TO SUPPLY CIRCUIT BREAKER OR FUSED BRANCH CIRCUIT DISCONNECT (SAFETY) SWITCHES WITH LAG TYPE FUSES FROM POWER SOURCE TO MACHINE. A SEPARATE GROUND WIRE MUST BE CONNECTED FROM DISCONNECT TO EQUIPMENT.
4 BASELINE "Z" IS THE SAME FOR ALL MILNOR MACHINES AND IS SHOWN ON ALL DIMENSIONAL DRAWINGS. THE DISTANCE BETWEEN BASELINE "Z" AND THE FINISHED FLOOR MAY VARY (WITH CHANGES IN FLOOR HEIGHT) AS REQUIRED TO INSURE THAT BASELINE "Z" IS HORIZONTAL AND ALL COMPONENTS REQUIRING GROUT ARE SET ON A MINIMUM 1" [25] THICK GROUT BED.
3 USE REFERENCE LINES "X", "Y", AND "Z" TO LOCATE ALL SERVICE CONNECTIONS.
2 NUMBERS IN BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
1 ALL DIMENSIONS SHOWN ARE APPROXIMATE, SUBJECT TO NORMAL MANUFACTURING TOLERANCES, AND TO OCCASIONAL CHANGES WITHOUT NOTICE THROUGH REDESIGN AND/OR RELOCATION OF COMPONENTS, ETC. DO NOT USE FOR CONSTRUCTION UNLESS CERTIFIED, AND IN NO EVENT PRE-PIPE CLOSER THAN FIVE FEET FROM MACHINE. FACTORY MUST BE CONSULTED FOR DIMENSIONS IF MACHINE IS TO BE MOVED THROUGH NARROW OR LOW CORRIDORS OR OPENINGS.

**ATTENTION**  
MOST REGULATORY AUTHORITIES (INCLUDING OSHA IN THE USA) HOLD THE  
OWNER/USER ULTIMATELY RESPONSIBLE TO MAINTAIN A SAFE WORKING ENVIRONMENT.  
ACCORDINGLY, THE OWNER/USER MUST RECOGNIZE ALL FORESEEABLE SAFETY HAZARDS,  
FURNISH SAFETY INSTRUCTIONS AND GUIDANCE TO ALL PERSONNEL WHO MAY COME  
IN CONTACT WITH THE INSTALLATION, AND PROVIDE ALL NECESSARY ADDITIONAL SAFETY  
GUARDS, FENCES, RESTRAINTS, DEVICES, ETC., NOT FURNISHED BY THE EQUIPMENT  
MANUFACTURER OR VENDOR.

**ATTENTION**  
THE FLOOR AND/OR OTHER SUPPORT COMPONENTS MUST HAVE SUFFICIENT  
STRENGTH (AND RIGIDITY WITH DUE CONSIDERATION FOR NATURAL OR RESONANT  
FREQUENCY THEREOF) TO WITHSTAND THE FULLY LOADED WEIGHT OF THE MACHINE  
INCLUDING THE GOODS, THE WATER, AND ANY REPEATED SINUSOIDAL (ROTATING) FORCES  
GENERATED DURING ITS OPERATION. WRITE THE FACTORY FOR ADDITIONAL MACHINE  
DATA FOR USE BY A COMPETENT SOIL AND/OR STRUCTURAL ENGINEER.

RECOMMENDED LINT COLLECTOR PIPING

DM	0	0.5M	1M	DWG#	BD6458DLCPBE
INCHES	0	12	24	36	2014453D